

PRODUCT CATALOGUE 2025


NEW CONCEPT LIGHTING

NEW EXPERIENCE OF LIGHTING

PRODUCT CODE



SPECIFIC OFFICE LIGHTING

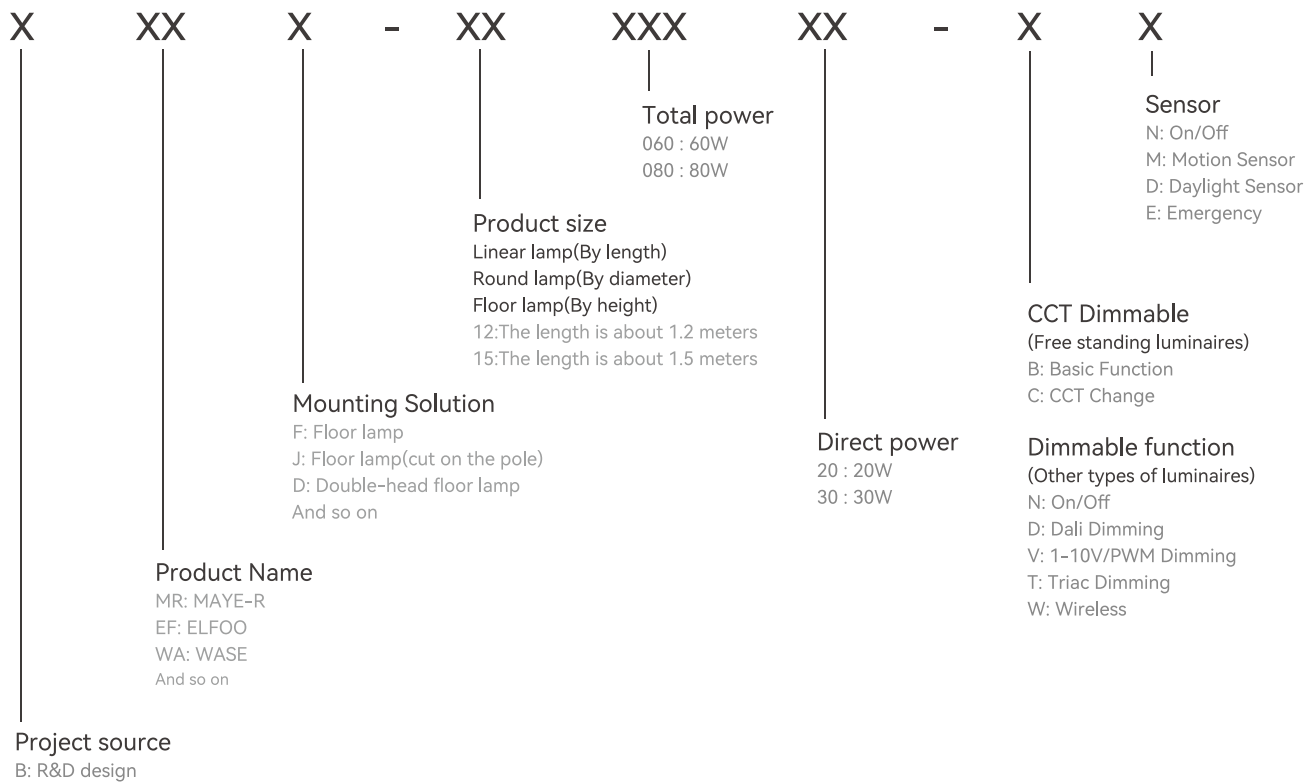

CONTENTS

01

SPECIFIC OFFICE LIGHTING

FREE STANDING LUMINAIRES

DESK FIXED LUMINAIRES

PENDANT LUMINAIRES

SURFACE MOUNTED LUMINAIRES

RECESSED LUMINAIRES

WALL MOUNTED LUMINAIRES

17

19

71


85

123

153

177

ARCHITECTURE GARDEN LIGHTING

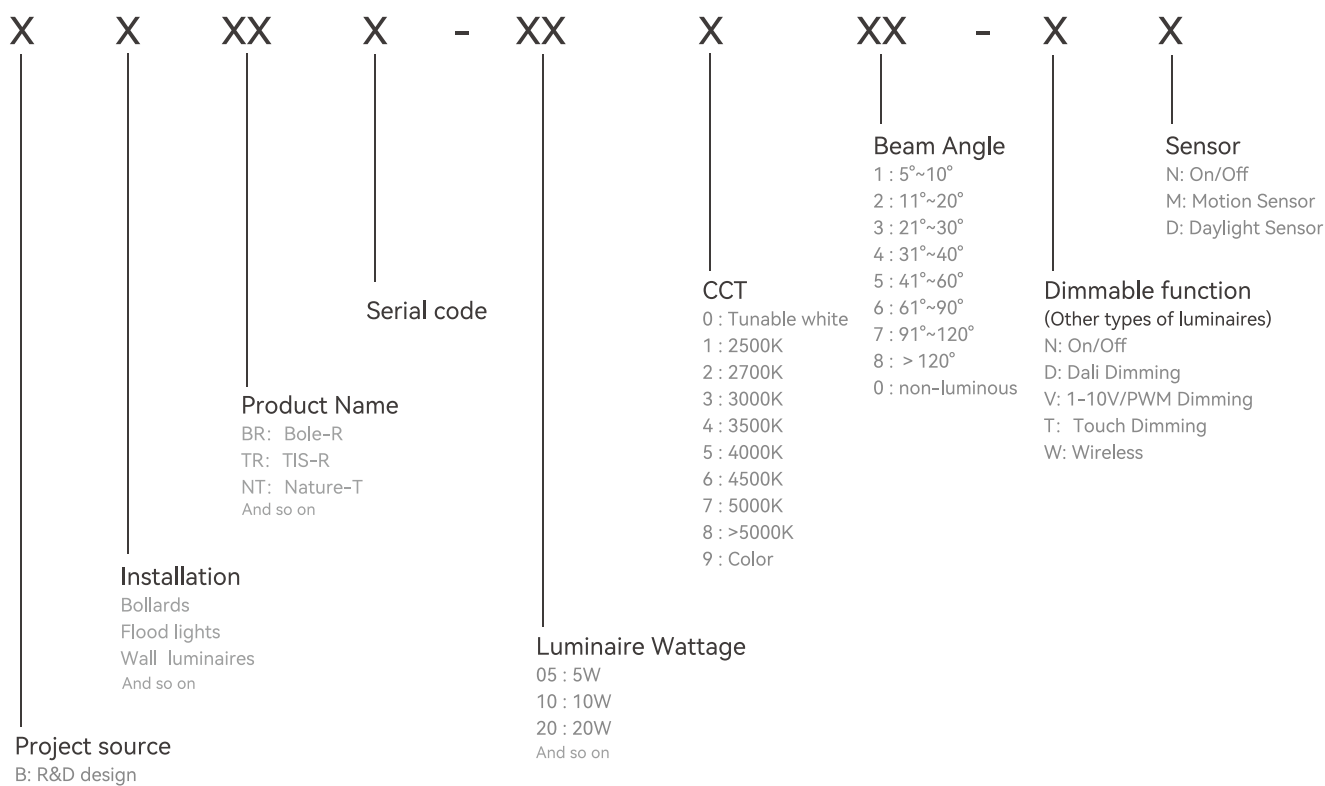

02

ARCHITECTURE GARDEN LIGHTING

BOLLARDS

FLOODLIGHTS

WALL LUMINAIRES

CEILING LUMINAIRES

WALL RECESSED LUMINAIRES

TABLE LAMPS

187

188

207

213


225

229

235

SPECIFIC OFFICE LIGHTING

01 FREE STANDING LUMINAIRES

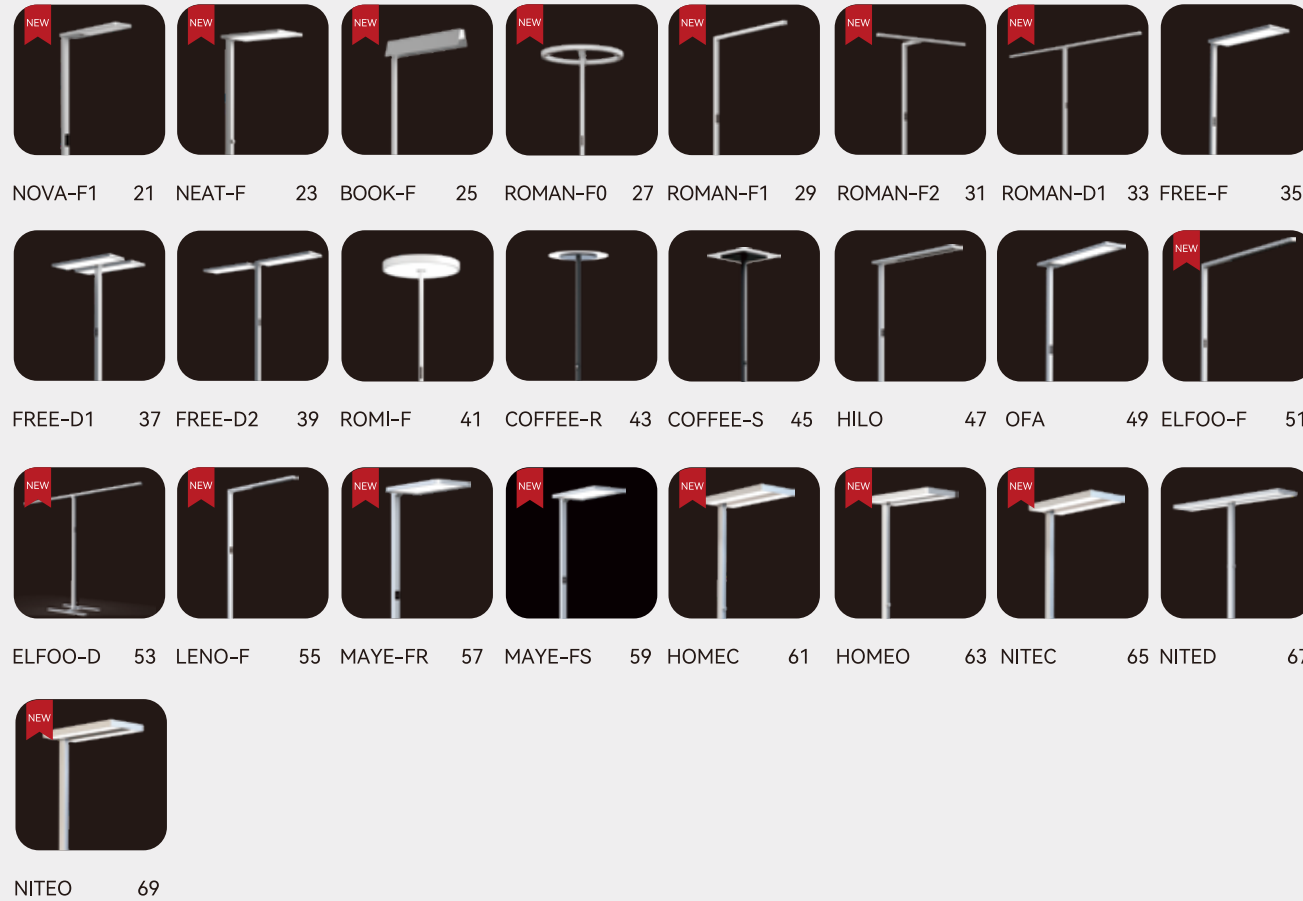

02 DESK FIXED LUMINAIRES



03 PENDANT LUMINAIRES



MAYE-PS 119 LICON-P 121

04 SURFACE MOUNTED LUMINAIRES




EZY-C 125 KEY-C 127 FREE-C 129 WASE-C 131 ROMI-C 133 ELFOO-C 135 ELFOO-C3 137 LICON-C 139




LENO-C1 141 LENO-C2 143 MAYE-CR0 145 MAYE-CR1 147 MAYE-CS0 149 MAYE-CS1 151

05 RECESSED LUMINAIRES

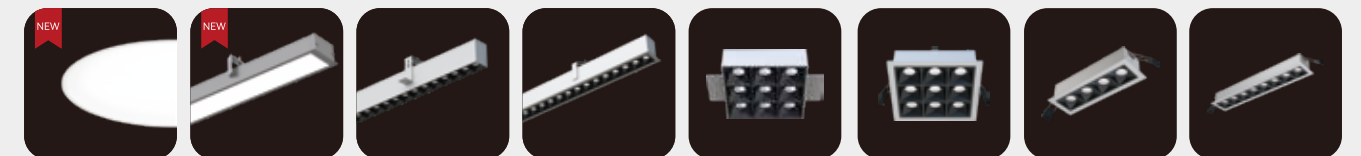

EZY-R 155 KEY-R 157 ELFOO-R0 159 ELFOO-R1 161 ELFOO-D2 163 ELFOO-D3 165 ELFOO-D4 167 ELFOO-D5 169

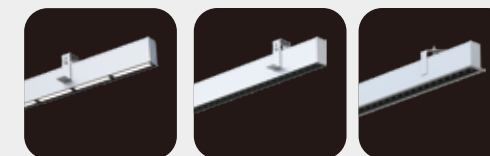

WASE-R 171 LENO-R0 173 LENO-R1 175

06 WALL MOUNTED LUMINAIRES



NEWA 179 LICON-W 181 MAYE-WR 183 MAYE-WS 185

ARCHITECTURE GARDEN LIGHTING

01 BOLLARDS

NEW



BUTTON-L 192

NEW



SHOW-L 194

NEW




BOLE-M 196



BOLE-R 198



BOLE-S 202



BOLE-U 206

02 FLOODLIGHTS



CICA-X 210



CICA-M 210



CICA-S 212



CICA-T 212

03 WALL LUMINAIRES

NEW



LUNA 216

NEW



CUBE 218



TIE-R 220



TIE-S 222



NATURE-W 224

04 CEILING LUMINAIRE



HALO-1 228



HALO-0 228

05 WALL RECESSED LUMINAIRE




SAFE-S 232




SAFE-O 234

06 TABLE LAMPS

NEW



PUDDING 238



NATURE-T 240



SPECIFIC OFFICE LIGHTING

01.

FREE STANDING LUMINAIRES	18
DESK FIXED LUMINAIRES	70
PENDANT LUMINAIRES	84
SURFACE MOUNTED LUMINAIRES	122
RECESSED LUMINAIRES	176
WALL MOUNTED LUMINAIRES	186

01

FREE STANDING LUMINAIRES

APPLICATIONS:
Open-plan office, individual office, etc.





NOVA-F1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<14
UGR

Dimmable

Tunable White

HCL system

CAS A+ MBI

SW2.1™

CE


RoHS



Asymmetric optics
Desktop uniformity
U0 >0.7



Integrated die-cast and 23mm
ultra-thin lamp head, good
heat dissipation performance



Daylight sensor &
Presence sensor


PRODUCT PARAMETERS

Luminaire Wattage	80W	100W
Luminous Flux	11200lm	14000lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Optic	Asymmetric optics	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Presence sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BNOF1-2010012-BD	↑ 12380lm/1620lm ↓	↑ 88W/12W ↓	3000/4000/6000K
BNOF1-2010012-CD	↑ 11500lm/1500lm ↓	↑ 88W/12W ↓	3000~5700K
BNOF1-2008012-BD	↑ 9580lm/1620lm ↓	↑ 68W/12W ↓	3000/4000/6000K
BNOF1-2008012-CD	↑ 8900lm/1500lm ↓	↑ 68W/12W ↓	3000~5700K

SIZE

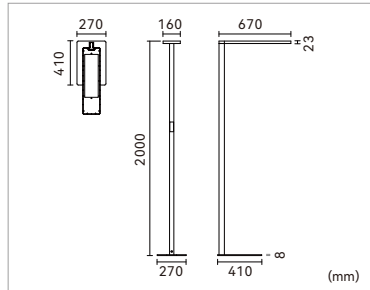

LIGHT DISTRIBUTION



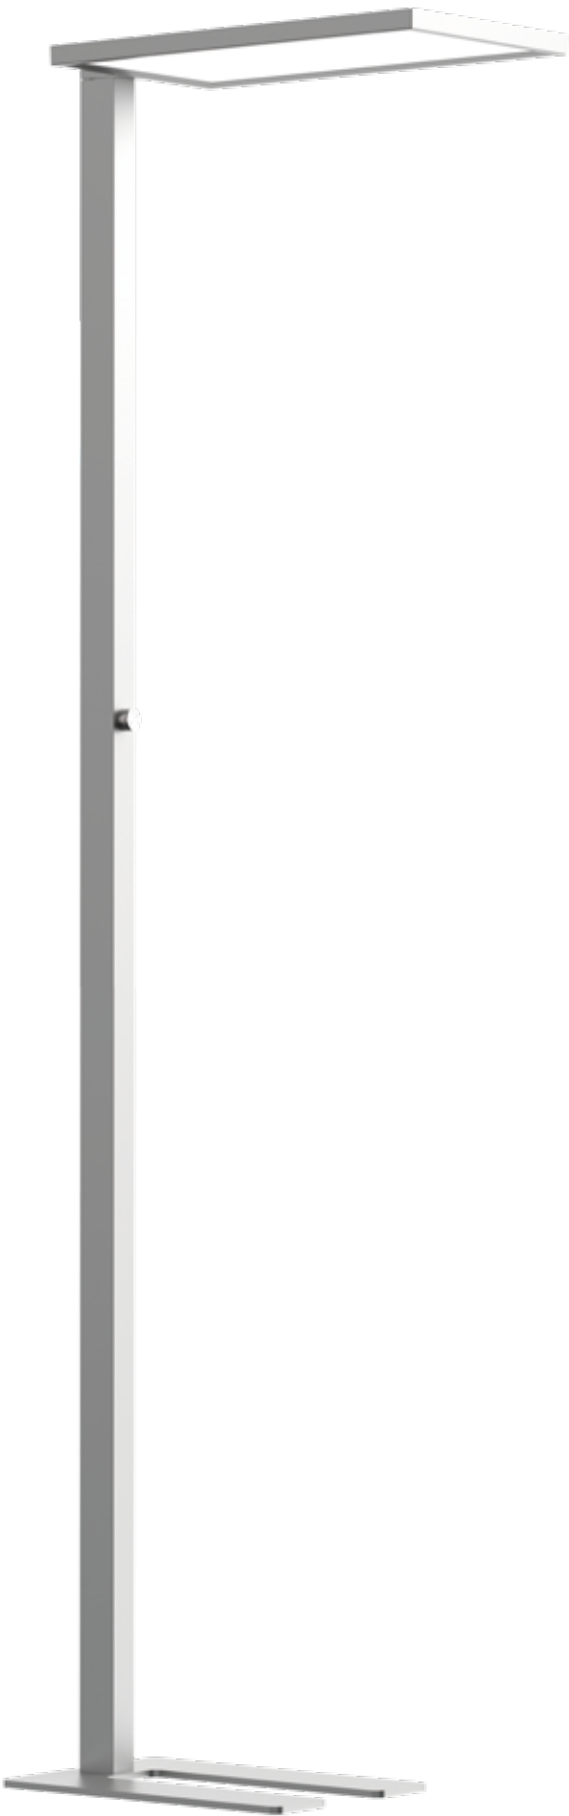

NEAT-F



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<18
UGR

Dimmable



Integrated die-cast and 22mm ultra-thin lamp head



Competitive price



Microprismatic diffuser design with low glare


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7500lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	↑ 115° / 80° ↓
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	NO
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BNEJ-1906030-BN	↑ 4200lm/3300lm ↓	↑ 30W/30W ↓	3000/4000/6000K

SIZE

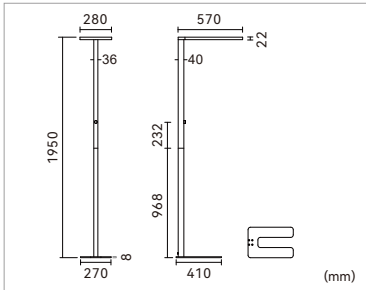


LIGHT DISTRIBUTION






BOOK-F NEW


APPLICATIONS:
Home office, study room, children's study area, etc.



Designed with large shielding angle



Light efficiency up to 130LM/W



Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7800lm
CCT	3000K / 4000K / 6000K
CRI	>80
Optic	Asymmetric optics
UGR	C0 <17
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Motion sensor
Colours	Silver / White / Black / Madeira brown / Blackberry leaf green / Hermosa pink / Spruce blue
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BBKJ-1806020-BN	↑ 6000lm/1800lm ↓	↑ 40W/20W ↓	3000/4000/6000K
BBKJ-1806020-BM	↑ 6000lm/1800lm ↓	↑ 40W/20W ↓	3000/4000/6000K

SIZE

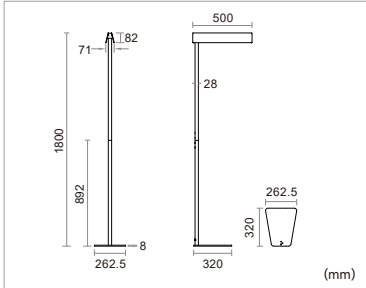

LIGHT DISTRIBUTION





ROMAN-F0



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<6 UGR

Dimmable

Tunable White

CAS A MBI

SMD2835

CE


RoHS



Large angle cut-off,
effective control of light
glare Anti-glare modules



Touch panel dimming



Support smart
control function


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	100W
Luminous Flux	9000lm	12000lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
CRI	>80		
Beam Angle	↑ 115° / 60° ↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BROF0-1906018-BN	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1906018-BM	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1906018-BD	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1908016-BN	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-BM	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-BD	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-CD	↑ 8800lm/1600lm ↓	↑ 64W/16W ↓	3000~5700K
BROF0-1910015-BD	↑ 13200lm/1800lm ↓	↑ 85W/15W ↓	3000/4000/6000K
BROF0-1910015-CD	↑ 11500lm/1500lm ↓	↑ 85W/15W ↓	3000~5700K

SIZE

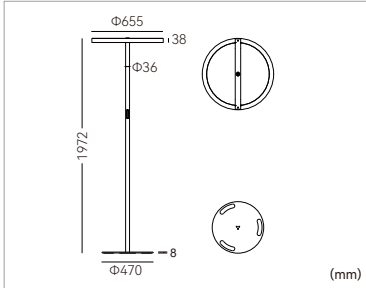

LIGHT DISTRIBUTION



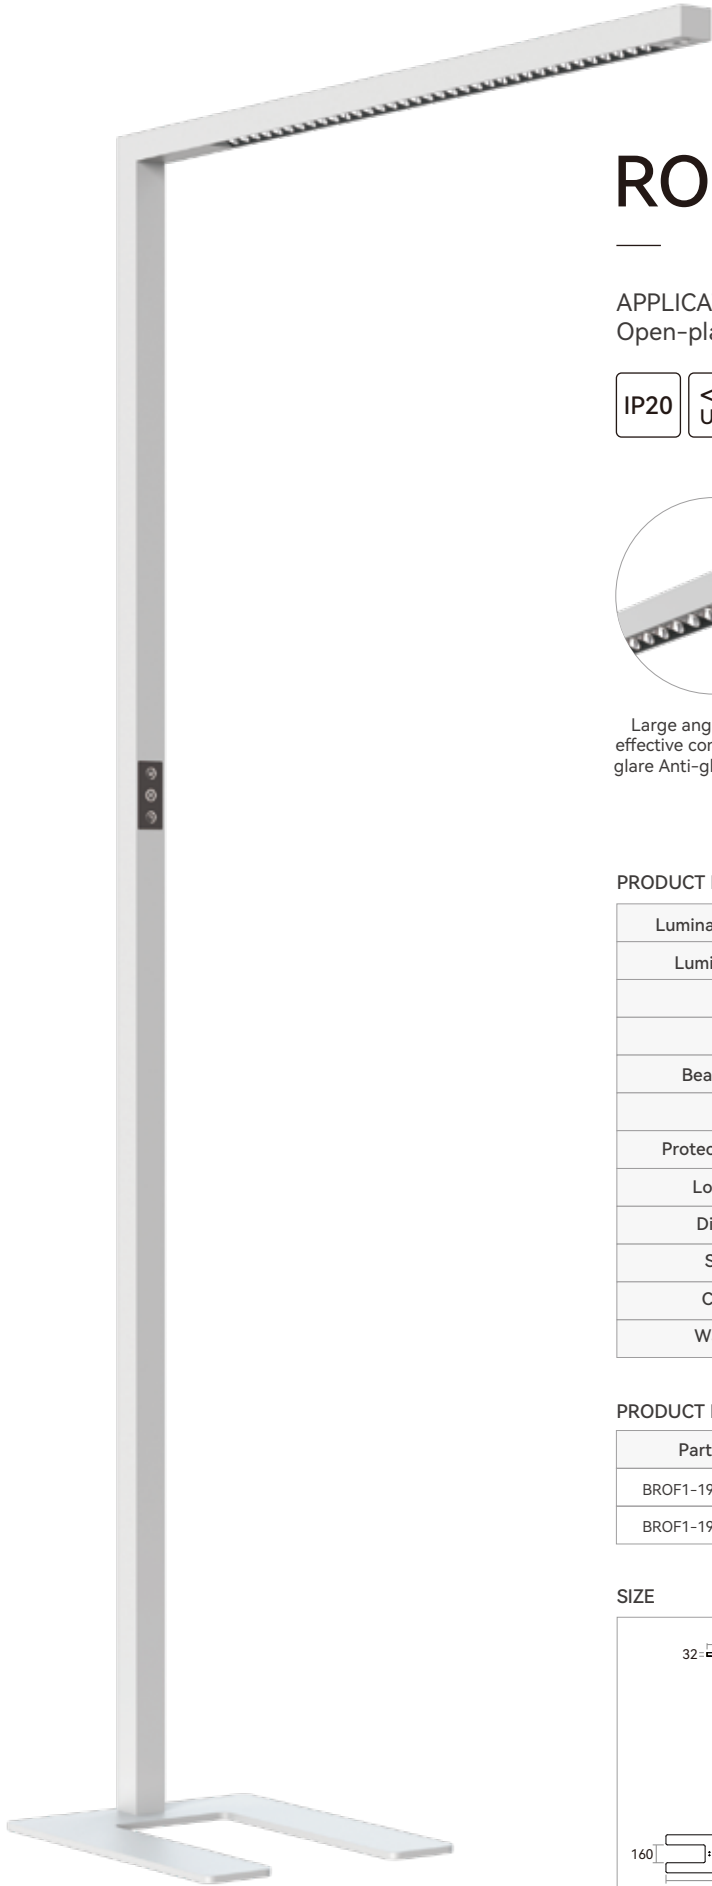

ROMAN-F1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<11 UGR

Dimmable

Tunable White


HCL system

CAS A MBI

SUNLIGHT

CE

RoHS



Large angle cut-off, effective control of light glare Anti-glare modules



Light efficiency up to 148LM/W



Support smart control function


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 60° ↓
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BROF1-1908020-BD	↑ 9350lm/2450lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BROF1-1908020-CD	↑ 8800lm/2000lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

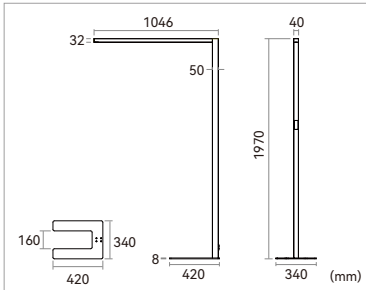

LIGHT DISTRIBUTION



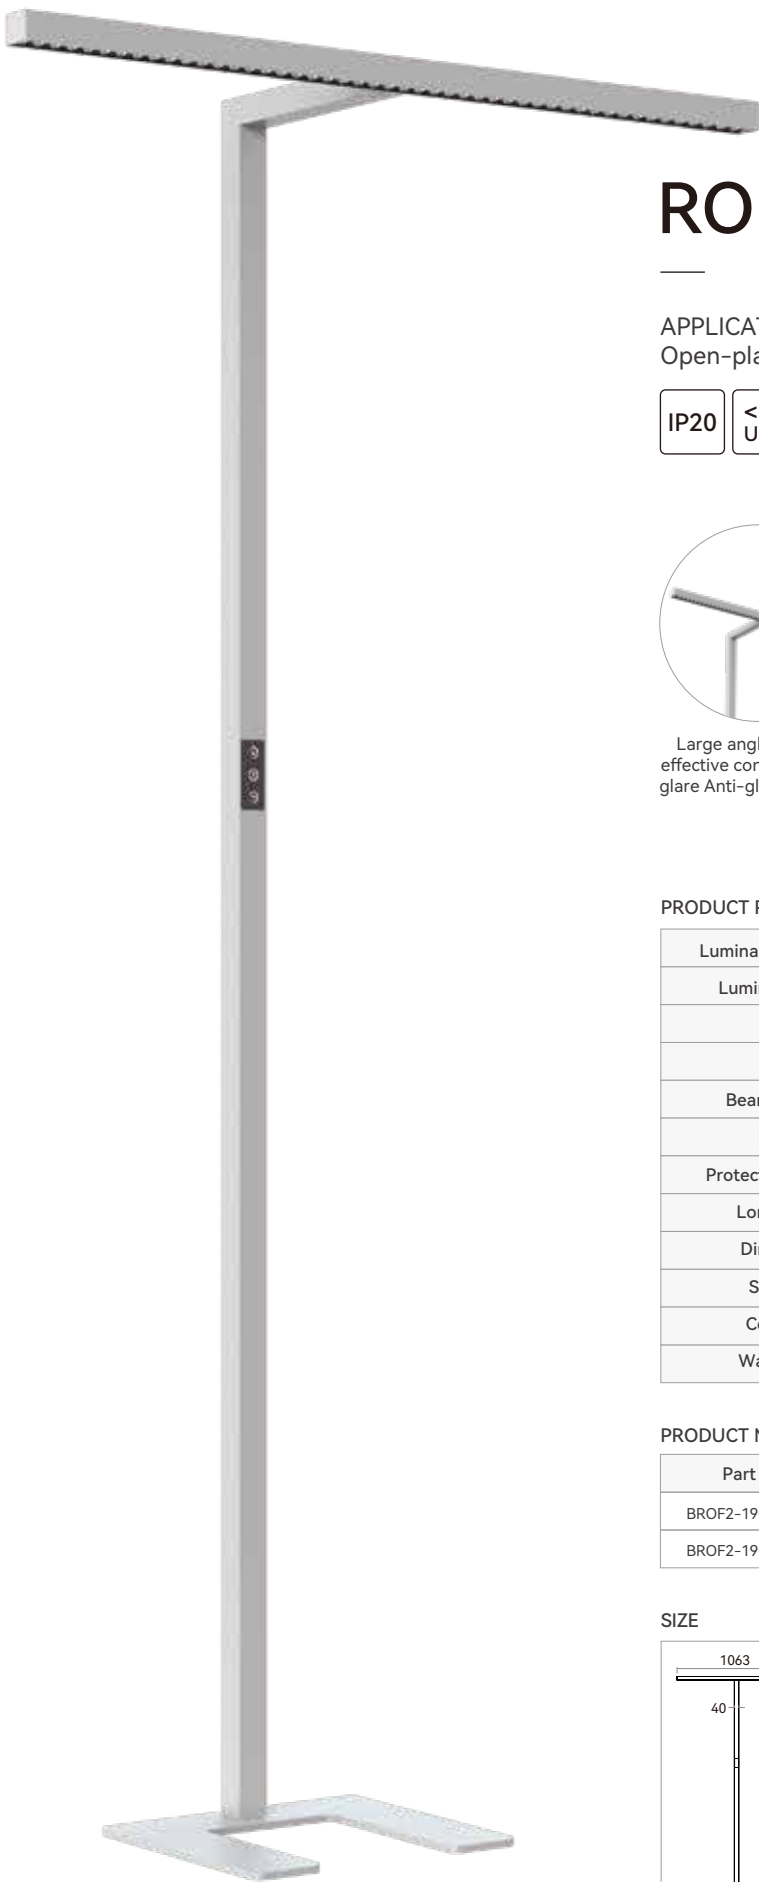

ROMAN-F2 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<11 UGR

Dimmable

Tunable White

HCL system

CAS A+ MB

SW2.1M

CE

RoHS



Large angle cut-off, effective control of light glare Anti-glare modules



Light efficiency up to 150LM/W



Support smart control function


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	12000lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 60° ↓
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BROF2-1908020-BD	↑ 9500lm/2500lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BROF2-1908020-CD	↑ 8800lm/2200lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

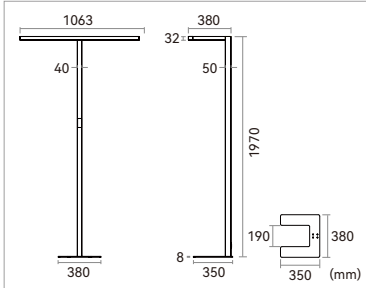

LIGHT DISTRIBUTION



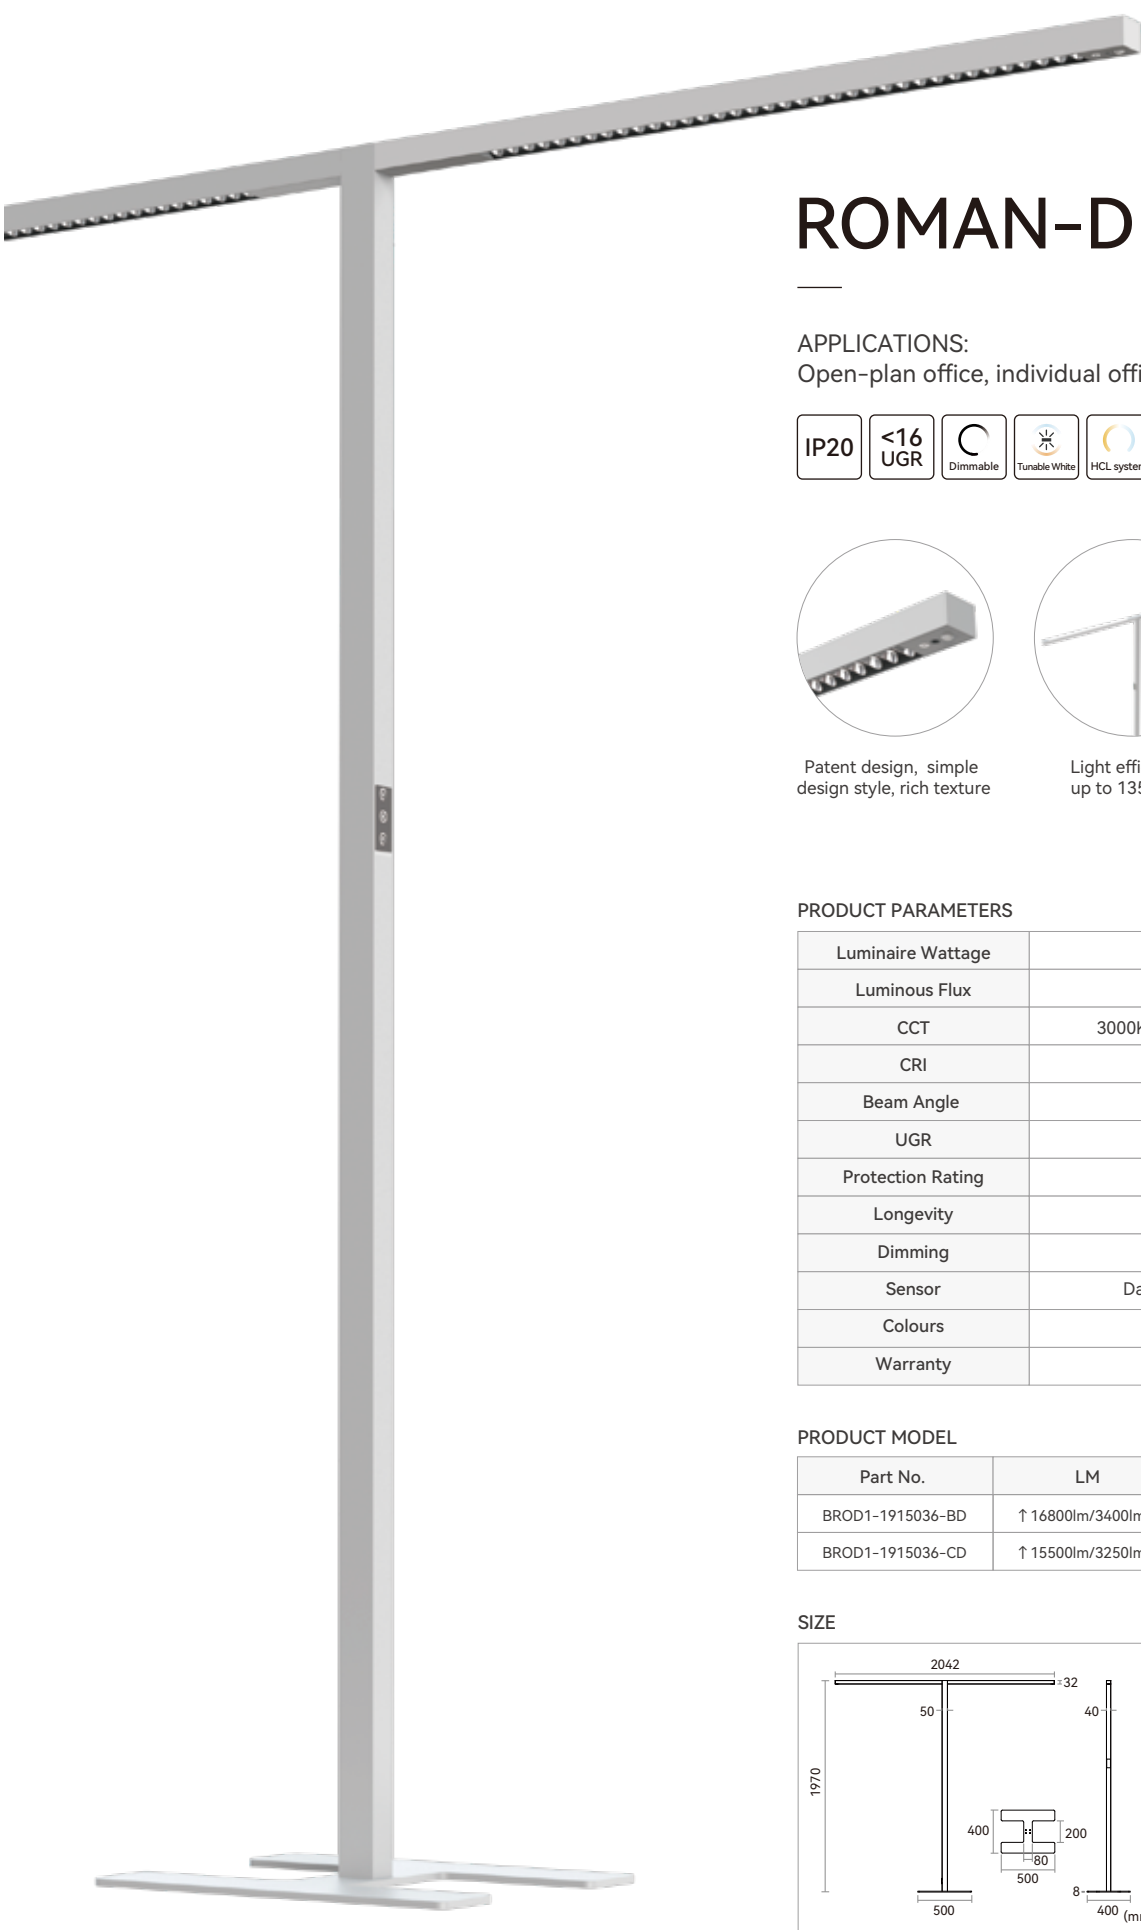

ROMAN-D1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<16
UGR

Dimmable

Tunable White

HCL system

CAS A MBI

SUNLITM

CE

RoHS

Patent design, simple design style, rich texture

Light efficiency up to 135LM/W

Support smart control function


PRODUCT PARAMETERS

Luminaire Wattage	150W
Luminous Flux	20200lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 60° ↓
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BROD1-1915036-BD	↑ 16800lm/3400lm ↓	↑ 114W/36W ↓	3000/4000/6000K
BROD1-1915036-CD	↑ 15500lm/3250lm ↓	↑ 114W/36W ↓	3000~5700K

SIZE

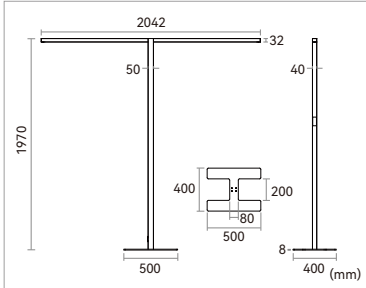

LIGHT DISTRIBUTION





FREE-F

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<14
UGR

Dimmable

Tunable White

HCL system

CAS A MBI

SWIRLTM

CE

RoHS



Patent design, simple design style, rich texture



Light efficiency up to 135LM/W



Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W	100W
Luminous Flux	10400lm	13300lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFRF-1908024-BN	↑ 7280lm/3120lm ↓	↑ 56W/24W ↓	3000/4000/6000K
BFRF-1908024-BD	↑ 7280lm/3120lm ↓	↑ 56W/24W ↓	3000/4000/6000K
BFRF-1910020-BN	↑ 10500lm/2800lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BFRF-1910020-BD	↑ 10500lm/2800lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BFRF-1910020-CD	↑ 10000lm/2600lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

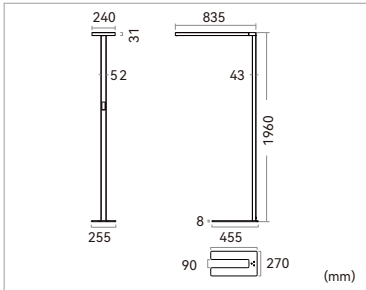

LIGHT DISTRIBUTION





FREE-D1

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<16
UGR

Dimmable

Tunable White

HCL system

CAS A+ MB

SWITCH

CE

RoHS

Patent design, simple design style, rich texture

Light efficiency up to 132LM/W

Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	150W
Luminous Flux	19800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BFRD-2015045-BN-01	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-BD-01	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-CN-01	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000~5700K
BFRD-2015045-CD-01	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000~5700K

SIZE

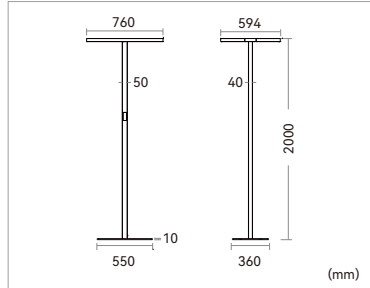

LIGHT DISTRIBUTION



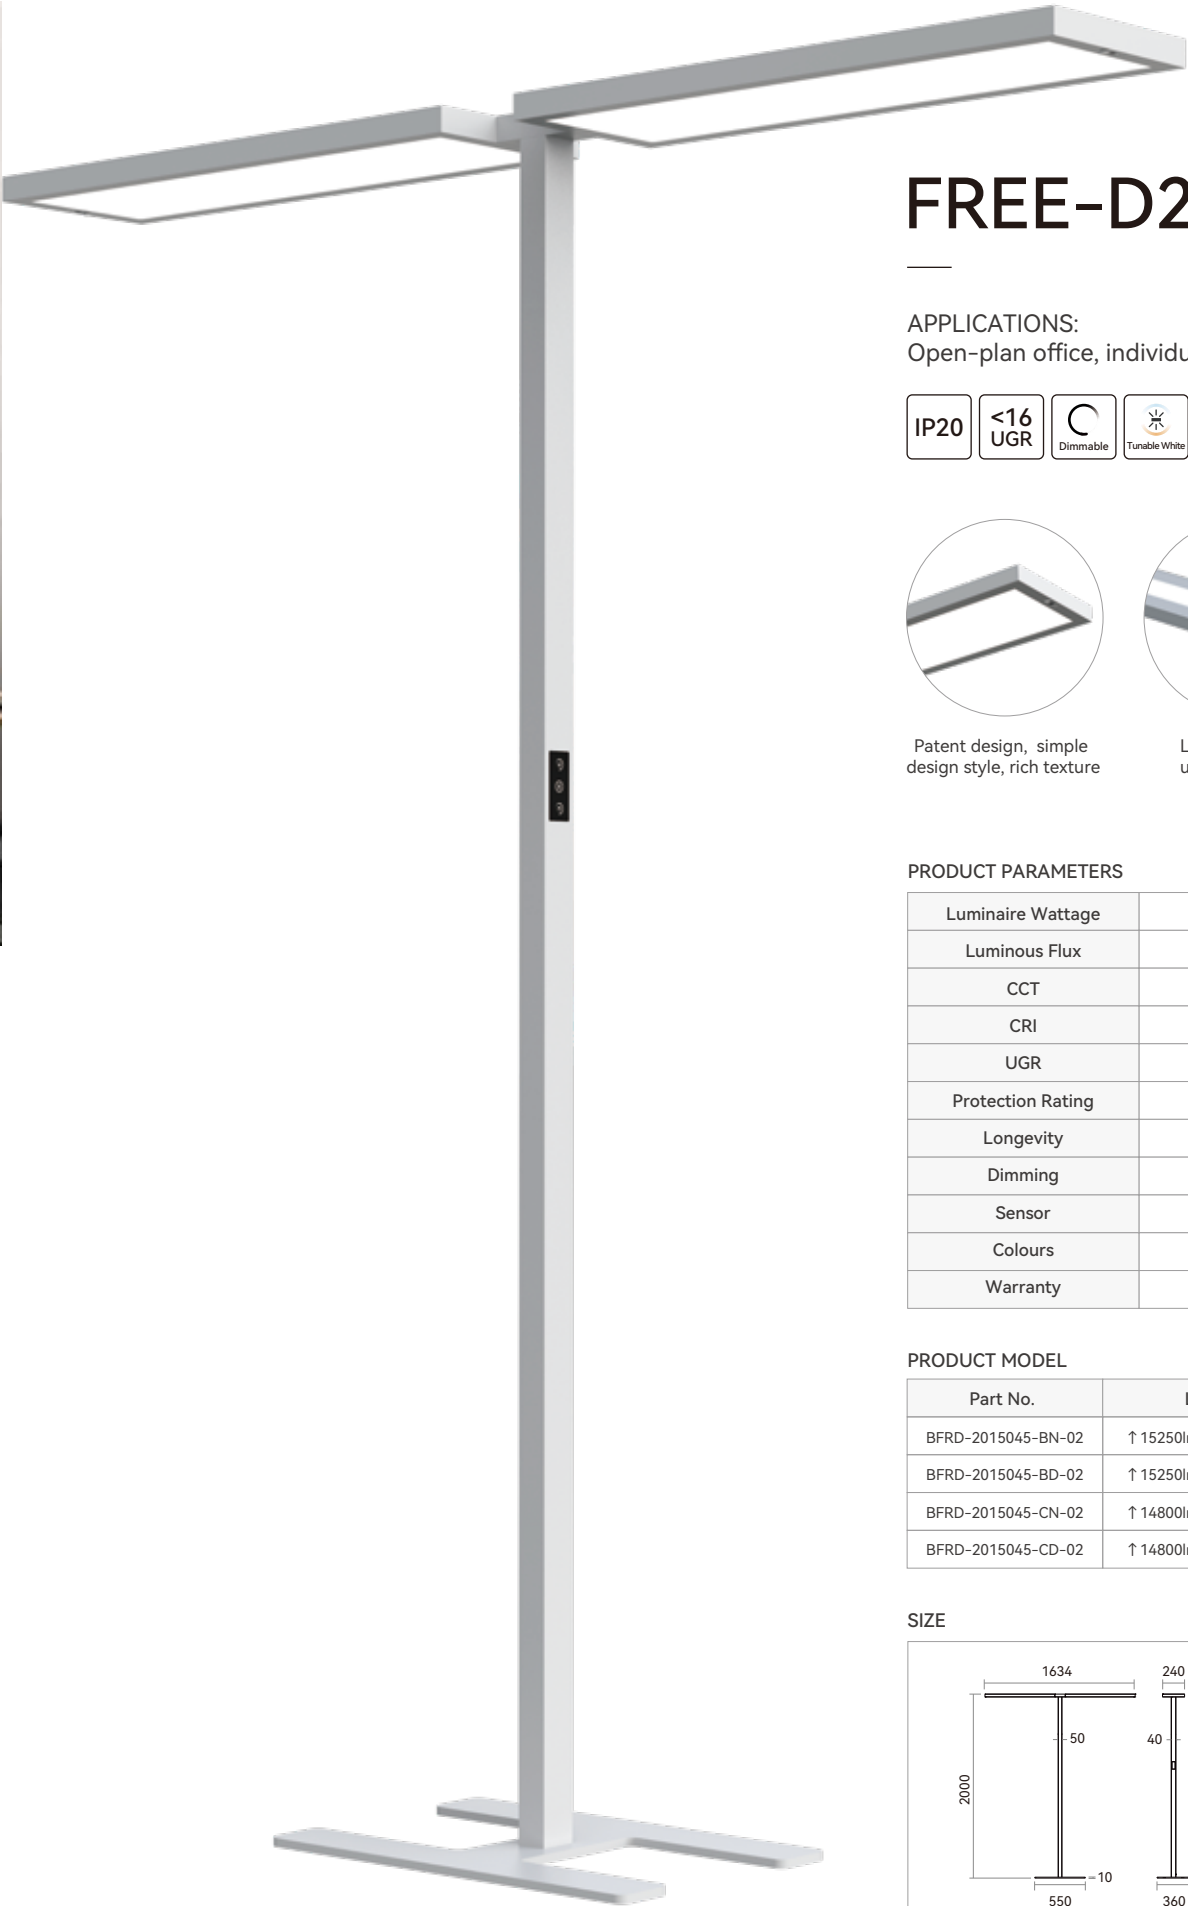

FREE-D2

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<16 UGR

Dimmable

Tunable White

HCL system

CAS A+MBI

SWIRL™

CE

RoHS

Patent design, simple design style, rich texture

Light efficiency up to 132LM/W

Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	150W
Luminous Flux	19800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BFRD-2015045-BN-02	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-BD-02	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-CN-02	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000~5700K
BFRD-2015045-CD-02	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000~5700K

SIZE

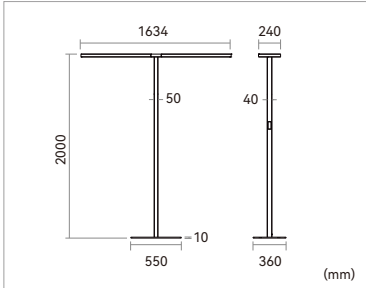

LIGHT DISTRIBUTION





ROMI-F

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<16
UGR

Dimmable

Tunable White

HCL system

CAS A+ MB1

SWA2TM

CE

RoHS



Microprism diffuser
UGR<16



Lumen efficiency
up to 120LM/W



Touch panel dimming


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	9645lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BROF-1908040-BN	↑ 6105lm/3540lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BROF-1908040-CN	↑ 5750lm/3372lm ↓	↑ 40W/40W ↓	3000~5700K

SIZE

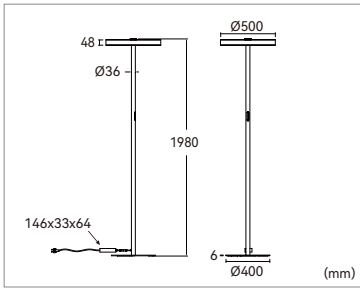

LIGHT DISTRIBUTION





COFFEE-R



APPLICATIONS:
Negotiation rooms, small meeting rooms,
breakout areas and other office areas.
Living room, bedrooms and study rooms.

IP20

<10
UGR

Dimmable

Tunable White


TUYA

CE

RoHS



95% Indirect light,
lumen efficiency
up to 135LM/W



Convenient installation



Cut-Off Pole (Optional)


PRODUCT PARAMETERS

Luminaire Wattage	45W
Luminous Flux	6000lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<10
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming / Bluetooth dimming (TUYA)(optional)
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BCRF-1904500-BN-03	↑ 6000lm	↑ 45W	3000/4000/6000K
BCRF-1904500-CN-03	↑ 5850lm	↑ 45W	3000~5700K
BCRF-1904500-WN-03	↑ 6000lm	↑ 45W	3000/4000/6000K
BCRJ-1904500-BN-03	↑ 6000lm	↑ 45W	3000/4000/6000K
BCRJ-1904500-CN-03	↑ 5850lm	↑ 45W	3000~5700K
BCRJ-1904500-WN-03	↑ 6000lm	↑ 45W	3000/4000/6000K

SIZE

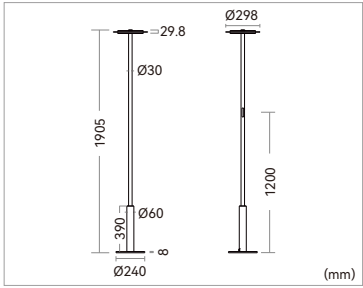

LIGHT DISTRIBUTION





COFFEE-S

APPLICATIONS:
Negotiation rooms, small meeting rooms,
breakout areas and other office areas.
Living room, bedrooms and study rooms.

IP20

<10
UGR

Dimmable

Tuya

CE

RoHS



95% Indirect light,
lumen efficiency
up to 135LM/W



Push dimming


PRODUCT PARAMETERS

Luminaire Wattage	45W
Luminous Flux	6200lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<10
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BCSF-1904500-BN	↑ 6200lm	↑ 45W	3000/4000/6000K

SIZE

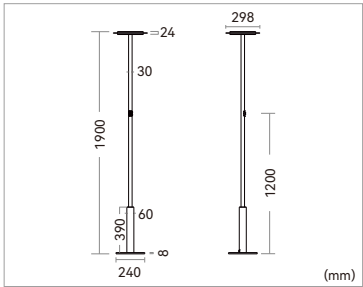

LIGHT DISTRIBUTION





75° Direct light, UGR<10	140° Indirect light, provide comfortable light to space	Direct and indirect light control individually
-----------------------------	---	---


PRODUCT PARAMETERS

Luminaire Wattage	110W	140W
Luminous Flux	13700lm	16700lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Beam Angle	↑ 140° / 75° ↓ or ↑ 140° / 50° ↓	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BHIF-1911015-BD	↑ 12000lm/1700lm ↓	↑ 95W/15W ↓	3000/4000/6000K
BHIF-1911015-CD	↑ 10000lm/1500lm ↓	↑ 95W/15W ↓	3000~5700K
BHIF-1914015-BD	↑ 15000lm/1700lm ↓	↑ 125W/15W ↓	3000/4000/6000K
BHIF-1914015-CD	↑ 13000lm/1500lm ↓	↑ 125W/15W ↓	3000~5700K

SIZE

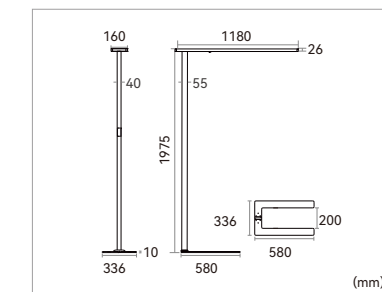

LIGHT DISTRIBUTION



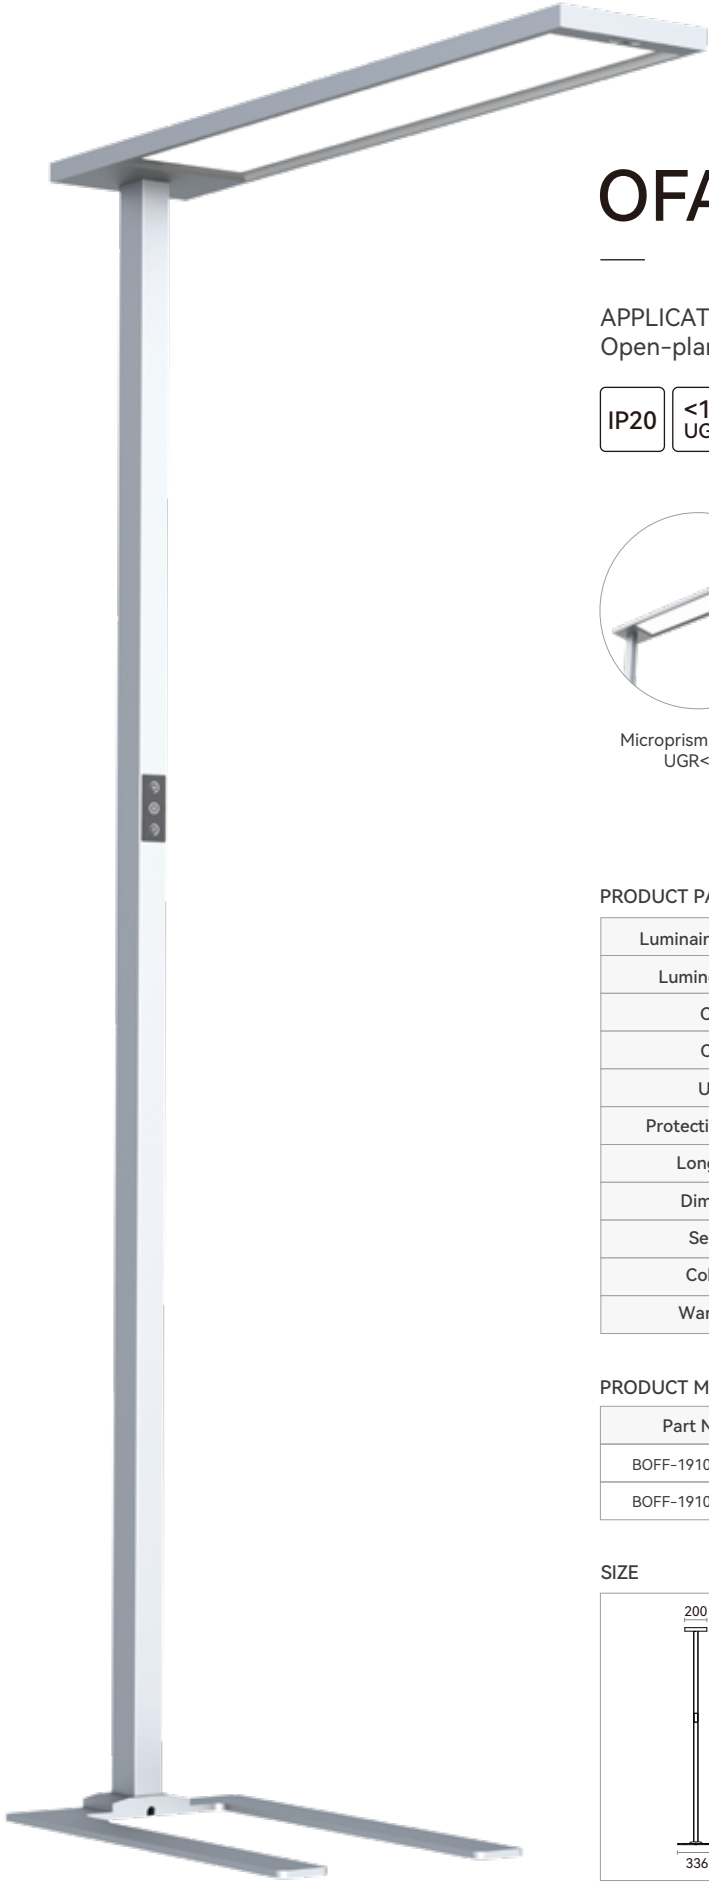

OFA

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<14 UGR

Dimmable

Tunable White

HCL system

CAS A MBI


8W/2.1m

CE

RoHS



Microprism diffuser
UGR<14



140° Indirect light,
provide comfortable
light to space



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	100W
Luminous Flux	12000lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
UGR	<14
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BOFF-1910025-BD	↑ 9500lm/2500lm ↓	↑ 75W/25W ↓	3000/4000/6000K
BOFF-1910025-CD	↑ 8250lm/2250lm ↓	↑ 75W/25W ↓	3000~5700K

SIZE

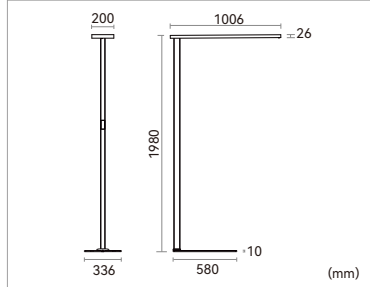

LIGHT DISTRIBUTION



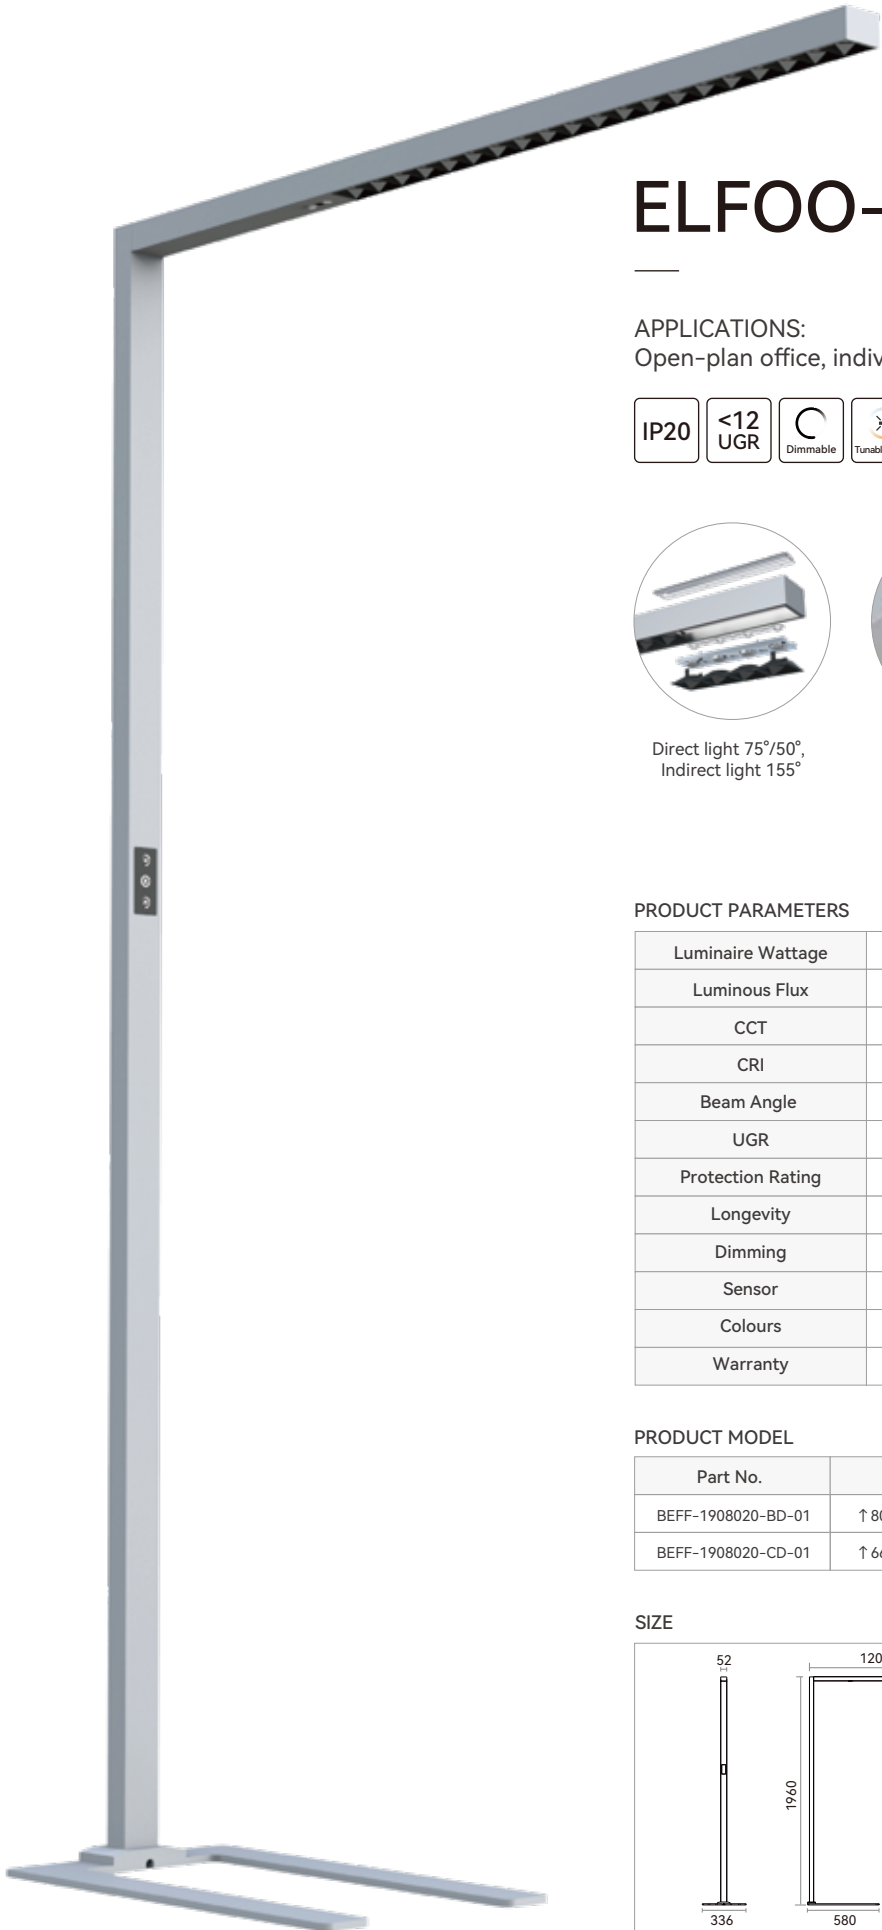

ELFOO-F 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<12
UGR

Dimmable

Tunable White


HCL system

CAS A MBI

SWIRL™

CE

RoHS



Direct light 75°/50°
Indirect light 155°



Support smart
control function



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	10400lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BEFF-1908020-BD-01	↑ 8000lm/2400lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BEFF-1908020-CD-01	↑ 6600lm/2200lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

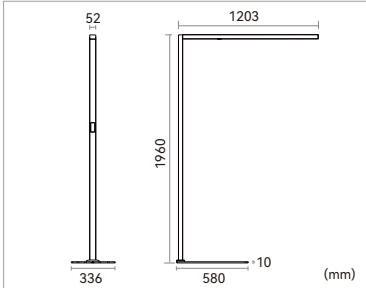

LIGHT DISTRIBUTION



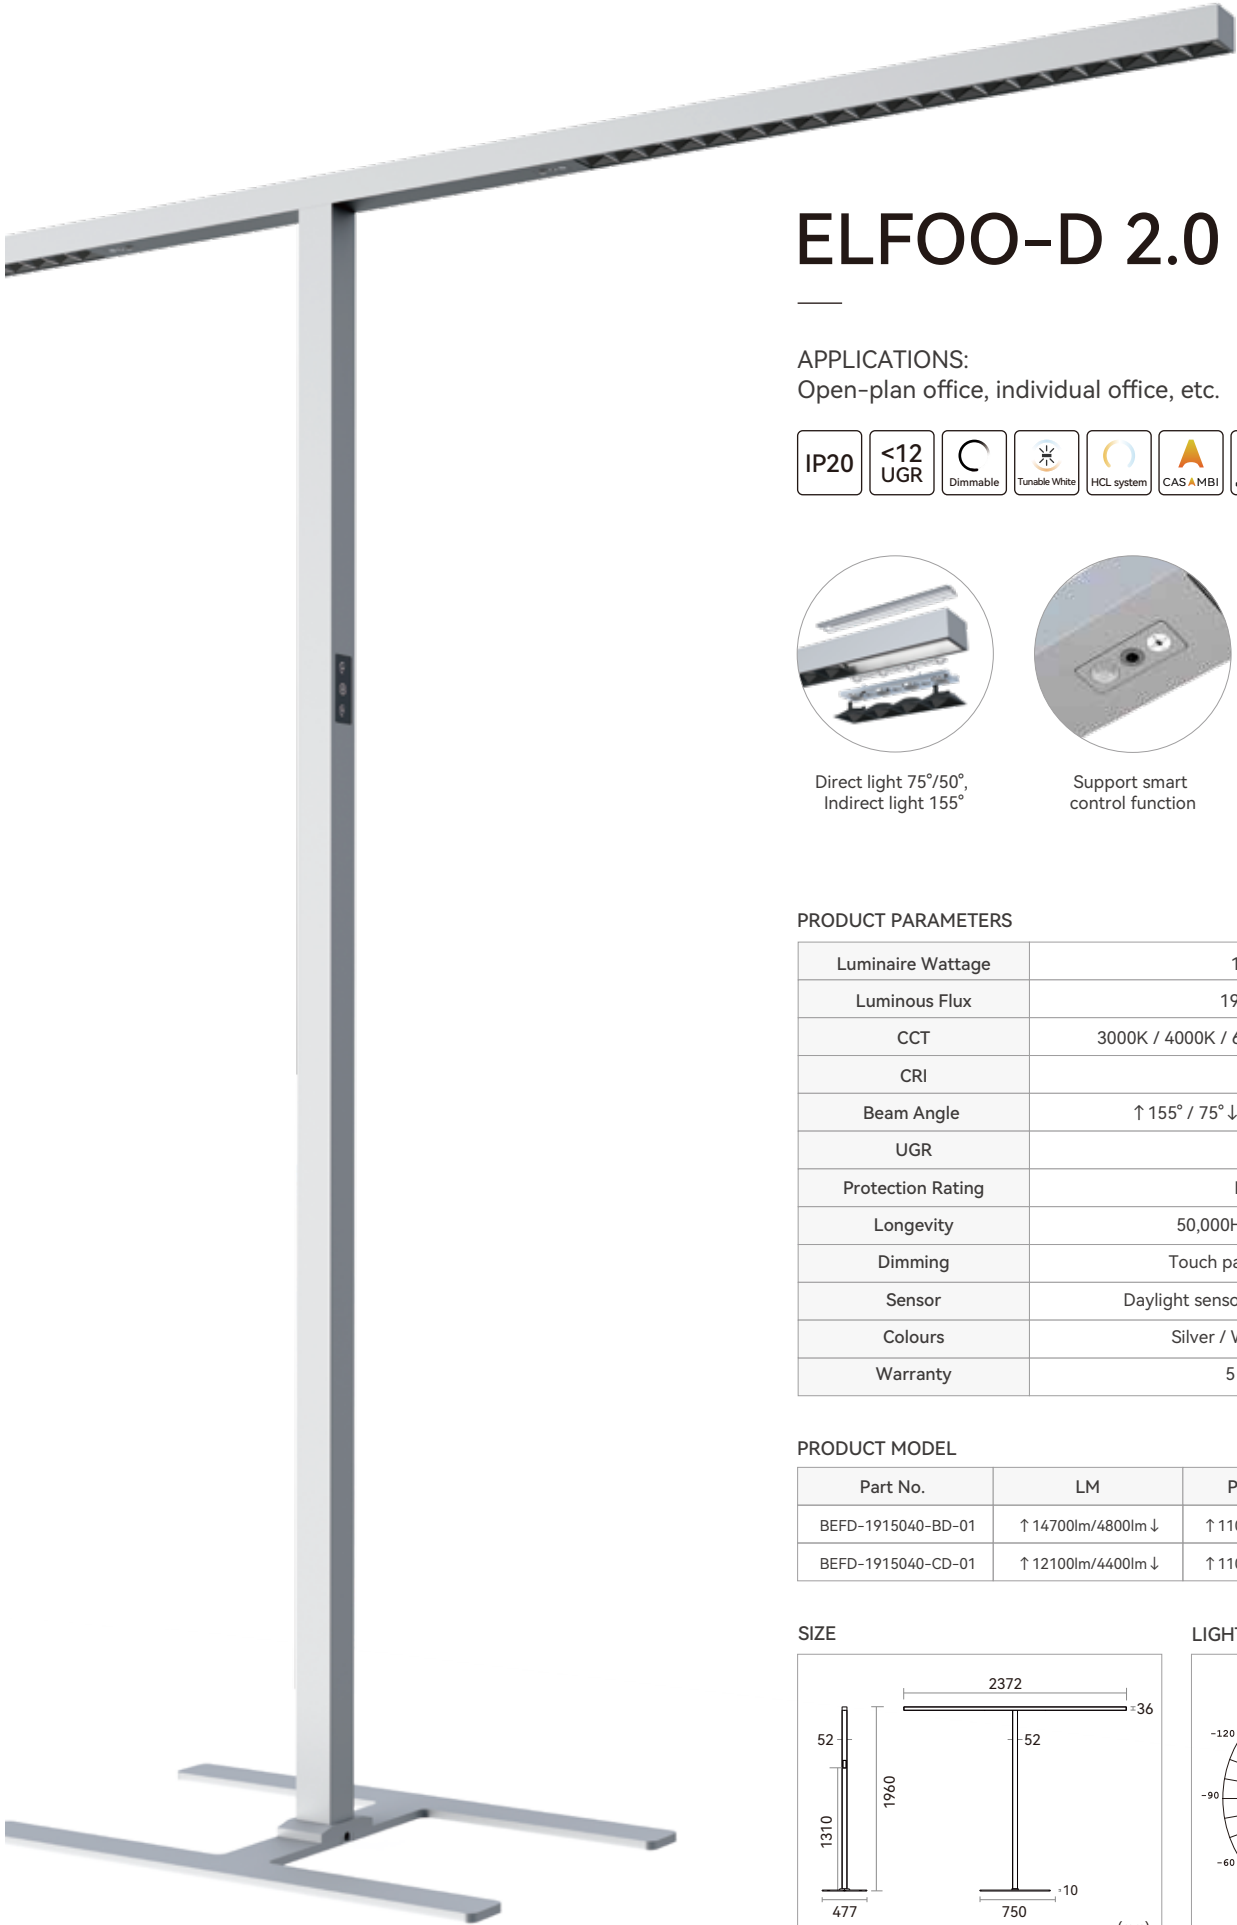

ELFOO-D 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<12 UGR

Dimmable

Tunable White


HCL system

CAS A+ MBII

SILVER

CE

RoHS



Direct light 75°/50°,
Indirect light 155°



Support smart
control function



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	150W
Luminous Flux	19500lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BEFD-1915040-BD-01	↑ 14700lm/4800lm ↓	↑ 110W/40W ↓	3000/4000/6000K
BEFD-1915040-CD-01	↑ 12100lm/4400lm ↓	↑ 110W/40W ↓	3000~5700K

SIZE

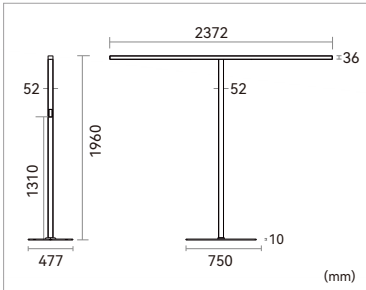

LIGHT DISTRIBUTION



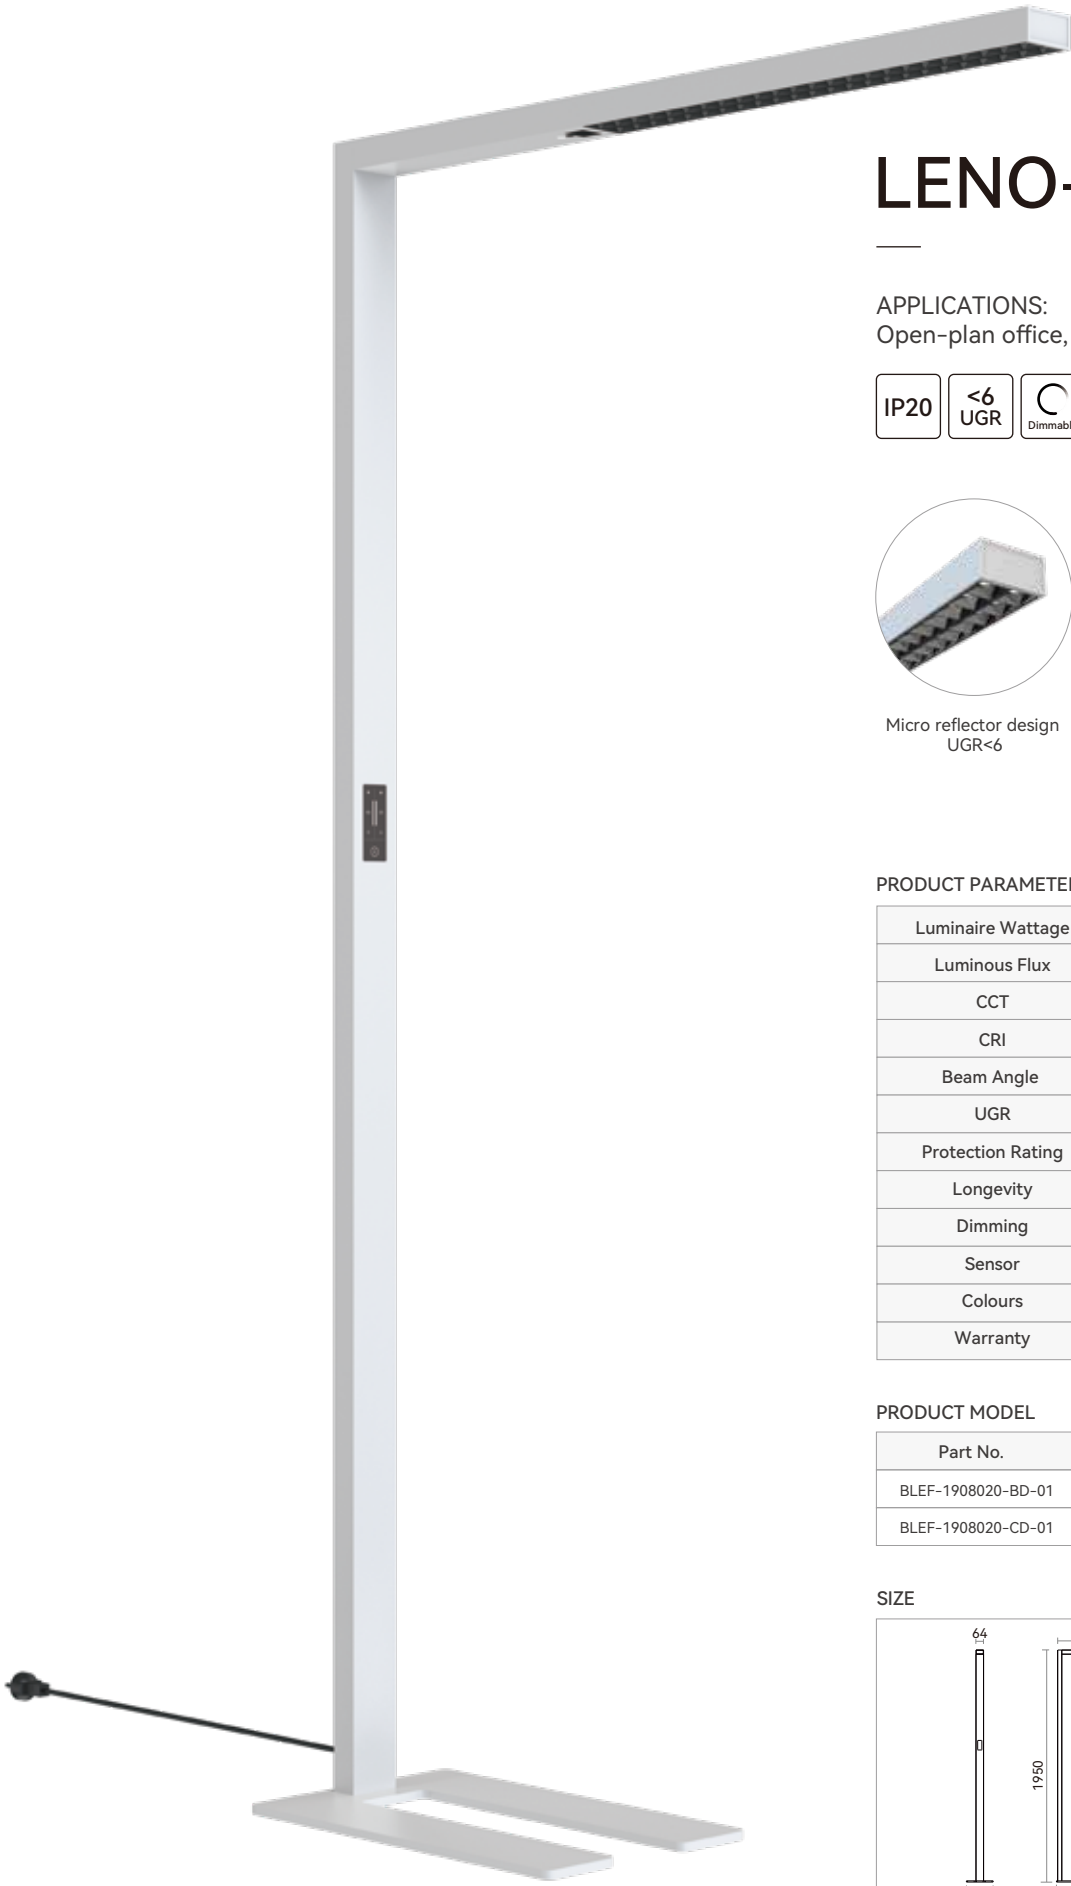

LENO-F 2.0



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<6 UGR

Dimmable

Tunable White


HCL system

CAS A MBI


SINCE 1971

CE

RoHS



Micro reflector design
UGR<6



Support smart
control function



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11600lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 50° ↓
UGR	<6
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Motion sensor / Presencesensor or Daylight sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BLEF-1908020-BD-01	↑ 9300lm/2300lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BLEF-1908020-CD-01	↑ 8950lm/2250lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

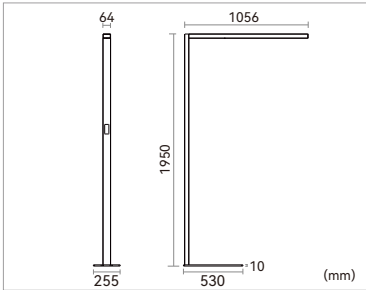

LIGHT DISTRIBUTION





MAYE-FR 2.0



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<18 UGR

Dimmable

Tunable White

HCL system

CAS A+MBI

三星认证

CE

RoHS

PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		

PRODUCT MODEL

Part No.	LM	Power	CCT
BMRF-1908040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000~5700K
BMRF-1910020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

LIGHT DISTRIBUTION



MAYE-FS 2.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<18 UGR

Dimmable

Tunable White

HCL system

CAS A+MBI

調光調色機能

CE

RoHS

High light efficiency
reach 150LM/W

Support smart
control function

Direct and indirect light
control individually

PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		

PRODUCT MODEL

Part No.	LM	Power	CCT
BMSF-1908040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000~5700K
BMSF-1910020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

(mm)

LIGHT DISTRIBUTION



HOME3.0



APPLICATIONS:
Open-plan office, individual office, etc.


IP20

<19
UGR


Dimmable



High light efficiency
reach 145LM/W



Support smart
control function



Cut-Off Pole, Good for
shipment and sales online


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BHOJ-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOJ-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOJ-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

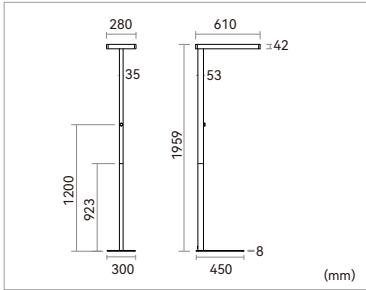

LIGHT DISTRIBUTION





HOMEEO 3.0



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<19
UGR


Dimmable








High light efficiency
reach 145LM/W



Support smart
control function



Knob dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BHOF-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOF-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOF-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

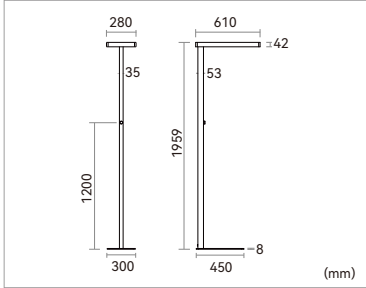

LIGHT DISTRIBUTION



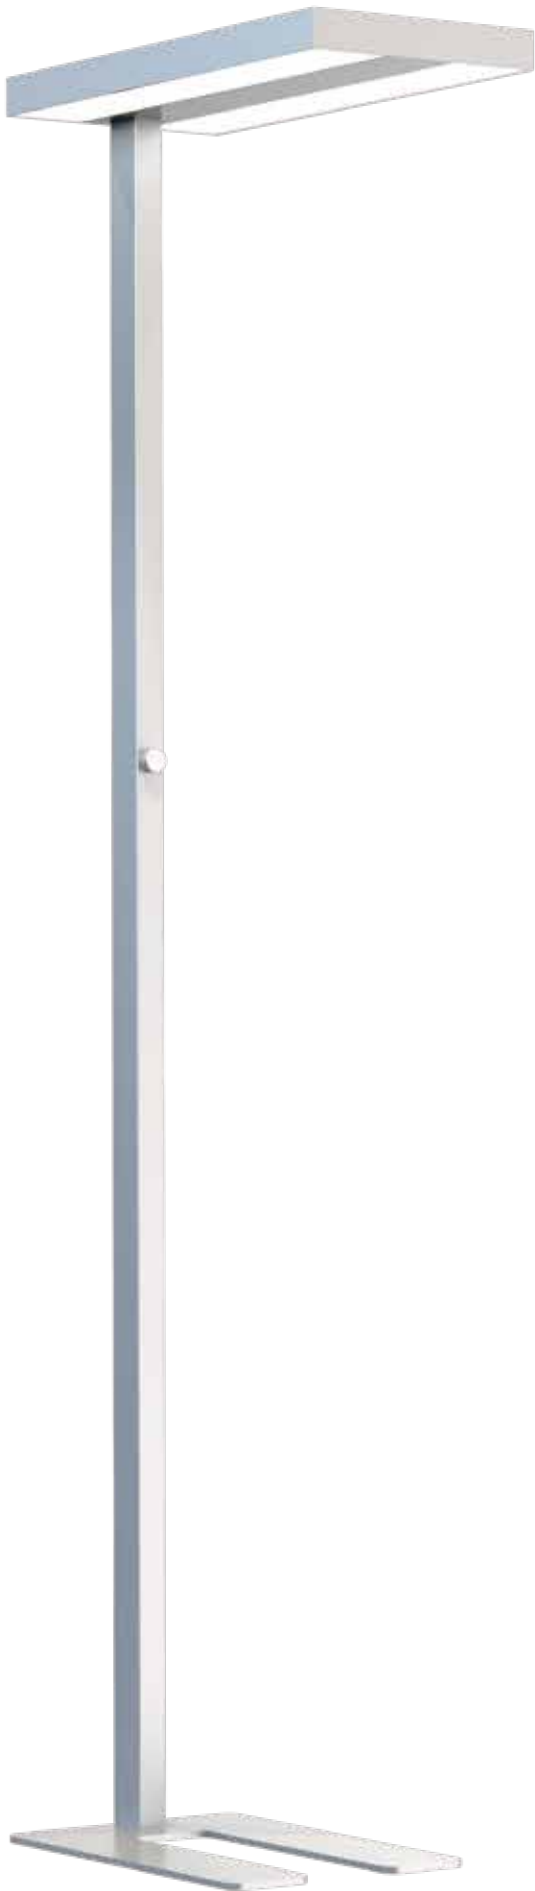

NITEC 3.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.


IP20

<19 UGR

Dimmable

CE


RoHS



High light efficiency
reach 145LM/W



UGR<19, uniform and
healthy lighting



Cut-Off Pole, Good for
shipment and sales online


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BNIJ-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIJ-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIJ-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIJ-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIJ-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIJ-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIJ-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIJ-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIJ-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

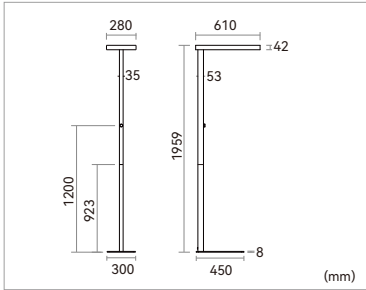

LIGHT DISTRIBUTION



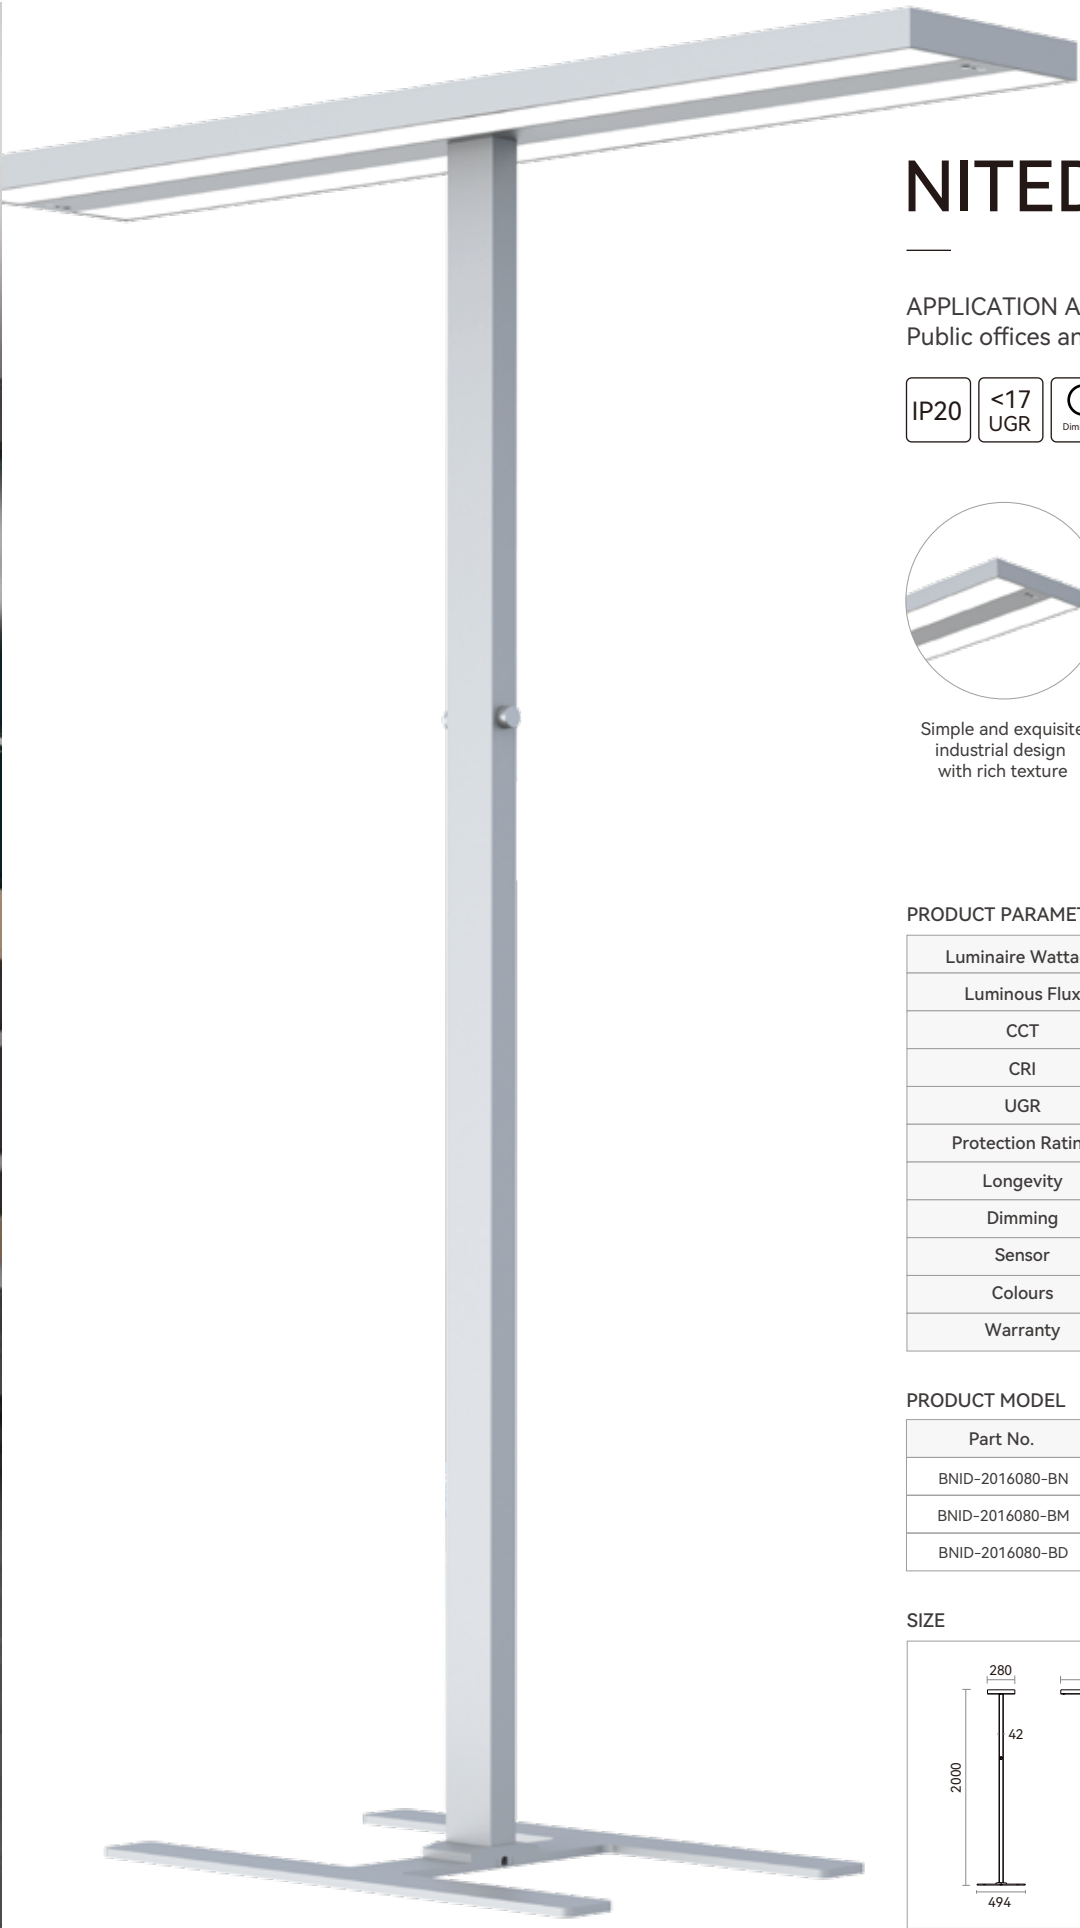

NITED

APPLICATION AREAS:
Public offices and other office spaces.


IP20

<17
UGR


Dimmable

CE


RoHS



Simple and exquisite
industrial design
with rich texture



UGR<17, uniform and
healthy lighting



Support smart
control function


PRODUCT PARAMETERS

Luminaire Wattage	160W
Luminous Flux	19200lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<17
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BNID-2016080-BN	↑ 11500lm/7700lm ↓	↑ 80W/80W ↓	3000/4000/6000K
BNID-2016080-BM	↑ 11500lm/7700lm ↓	↑ 80W/80W ↓	3000/4000/6000K
BNID-2016080-BD	↑ 11500lm/7700lm ↓	↑ 80W/80W ↓	3000/4000/6000K

SIZE

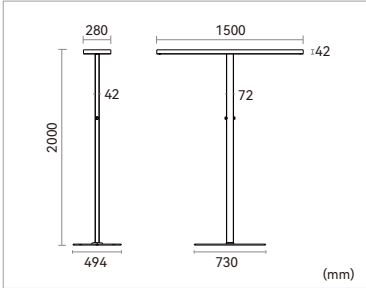

LIGHT DISTRIBUTION





NITEO 3.0




APPLICATION AREAS:
For personal offices, public offices and other office spaces.

IP20

<19
UGR


Dimmable



Simple and exquisite industrial design with rich texture



UGR<19, uniform and healthy lighting



Support smart control function


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNIF-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIF-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIF-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIF-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIF-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIF-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIF-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIF-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIF-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

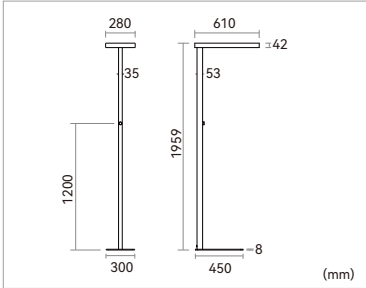

LIGHT DISTRIBUTION





02

DESK FIXED LUMINAIRES

APPLICATIONS:

Open-plan office, individual office, etc.

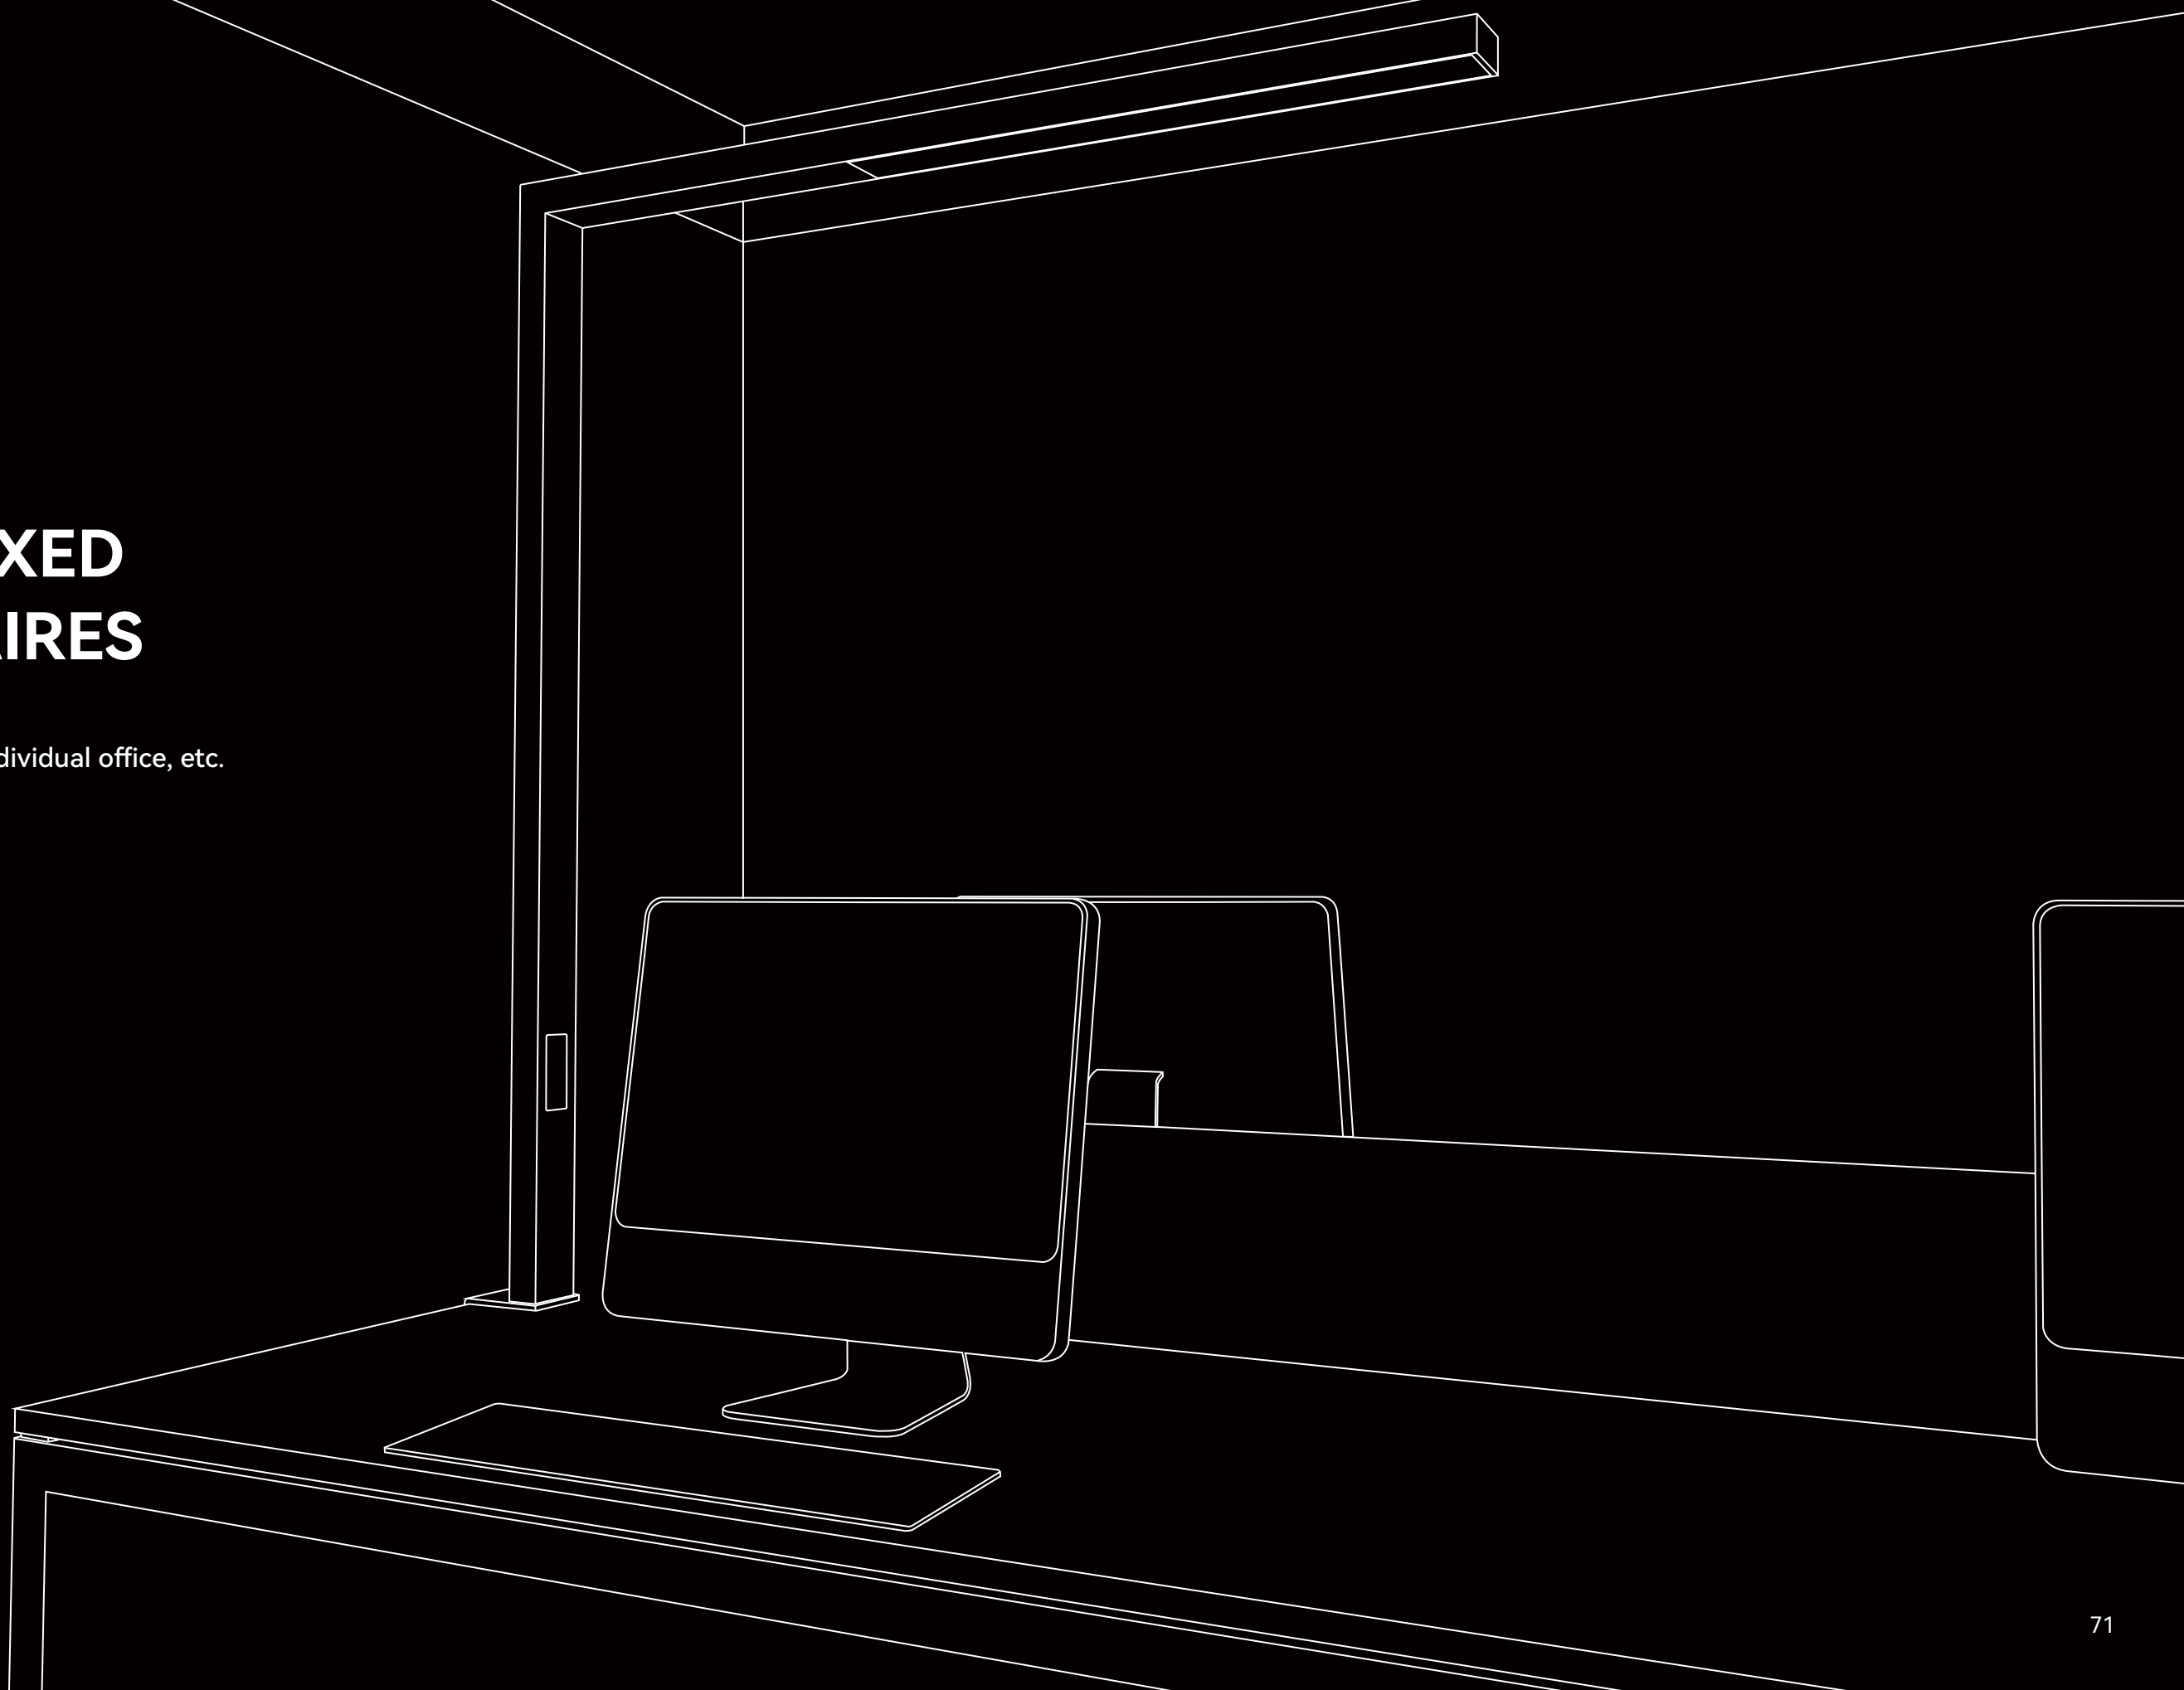

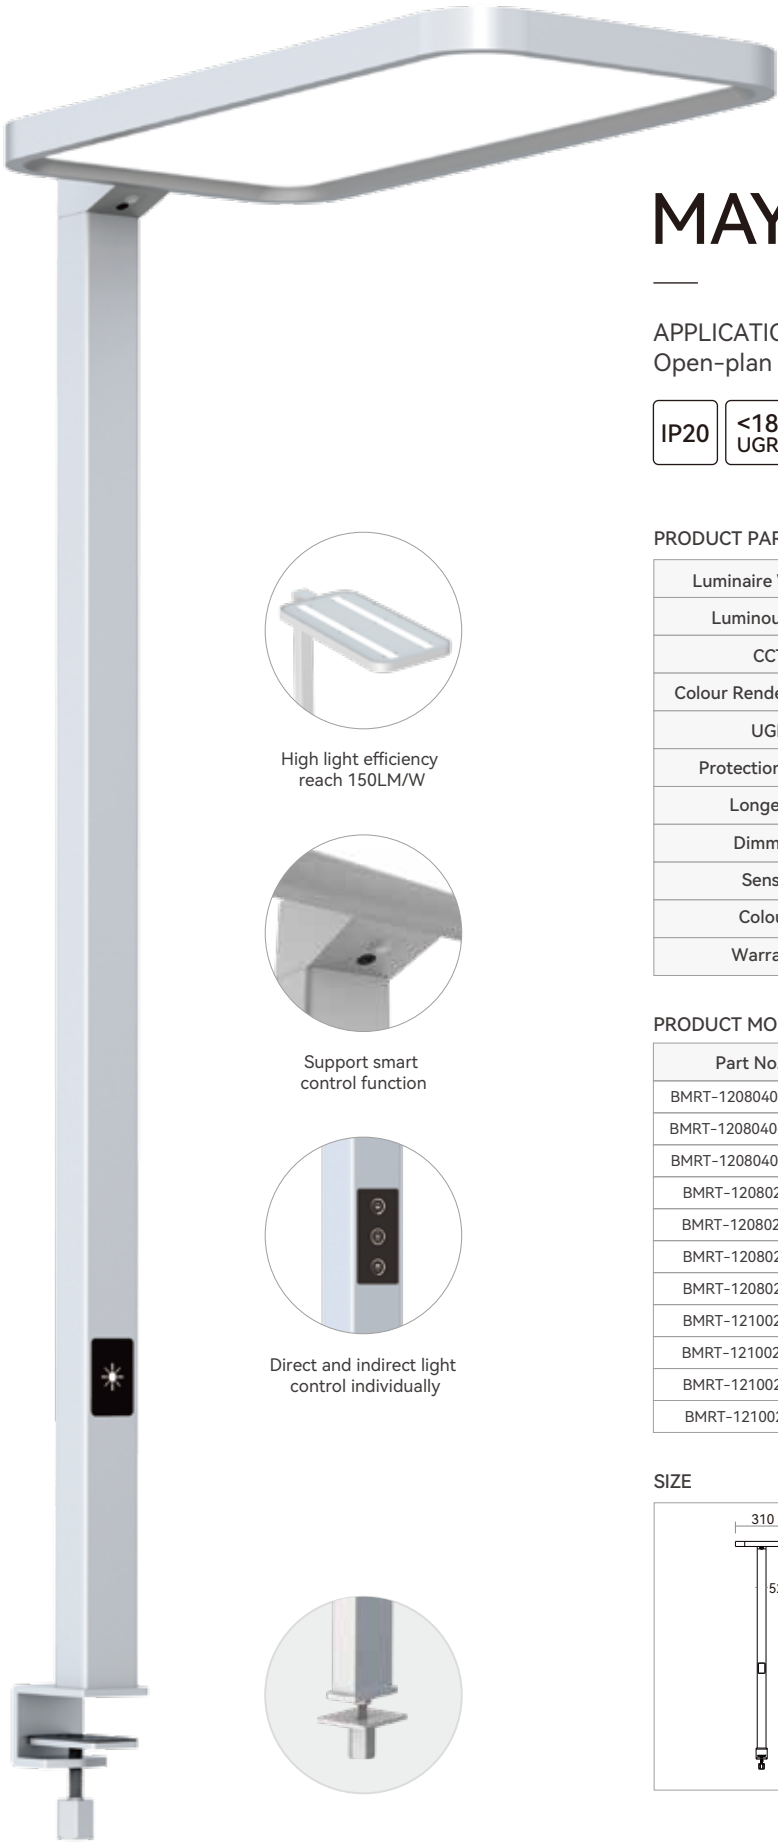

MAYE-TR 2.0



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<18 UGR

Dimmable

Tunable White

HCL system

CAS A MB

SWIRL

CE

RoHS


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BMRT-1208040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000~5700K
BMRT-1210020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

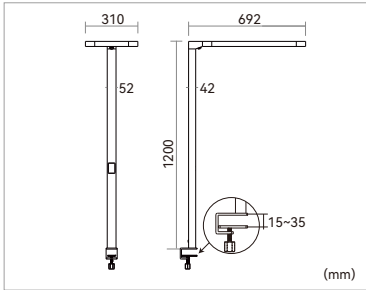

LIGHT DISTRIBUTION



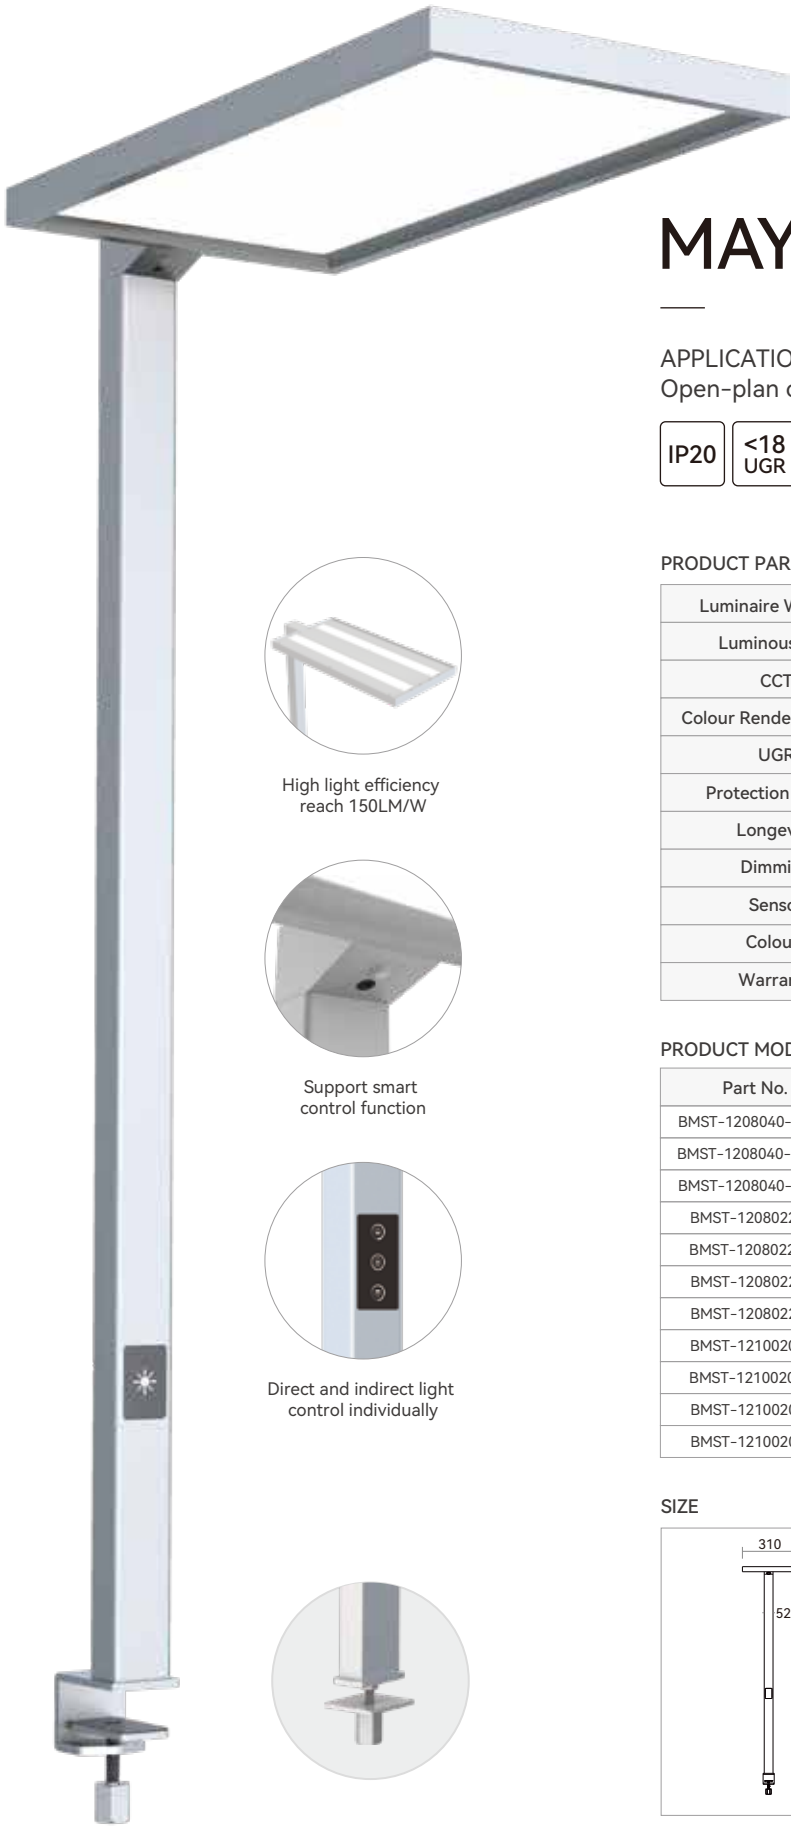

MAYE-TS 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.




PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BMST-1208040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000~5700K
BMST-1210020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

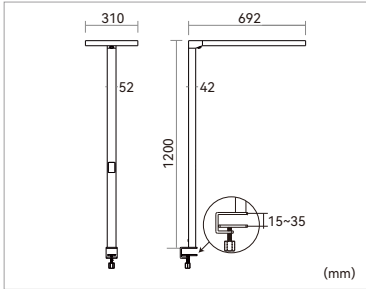

LIGHT DISTRIBUTION



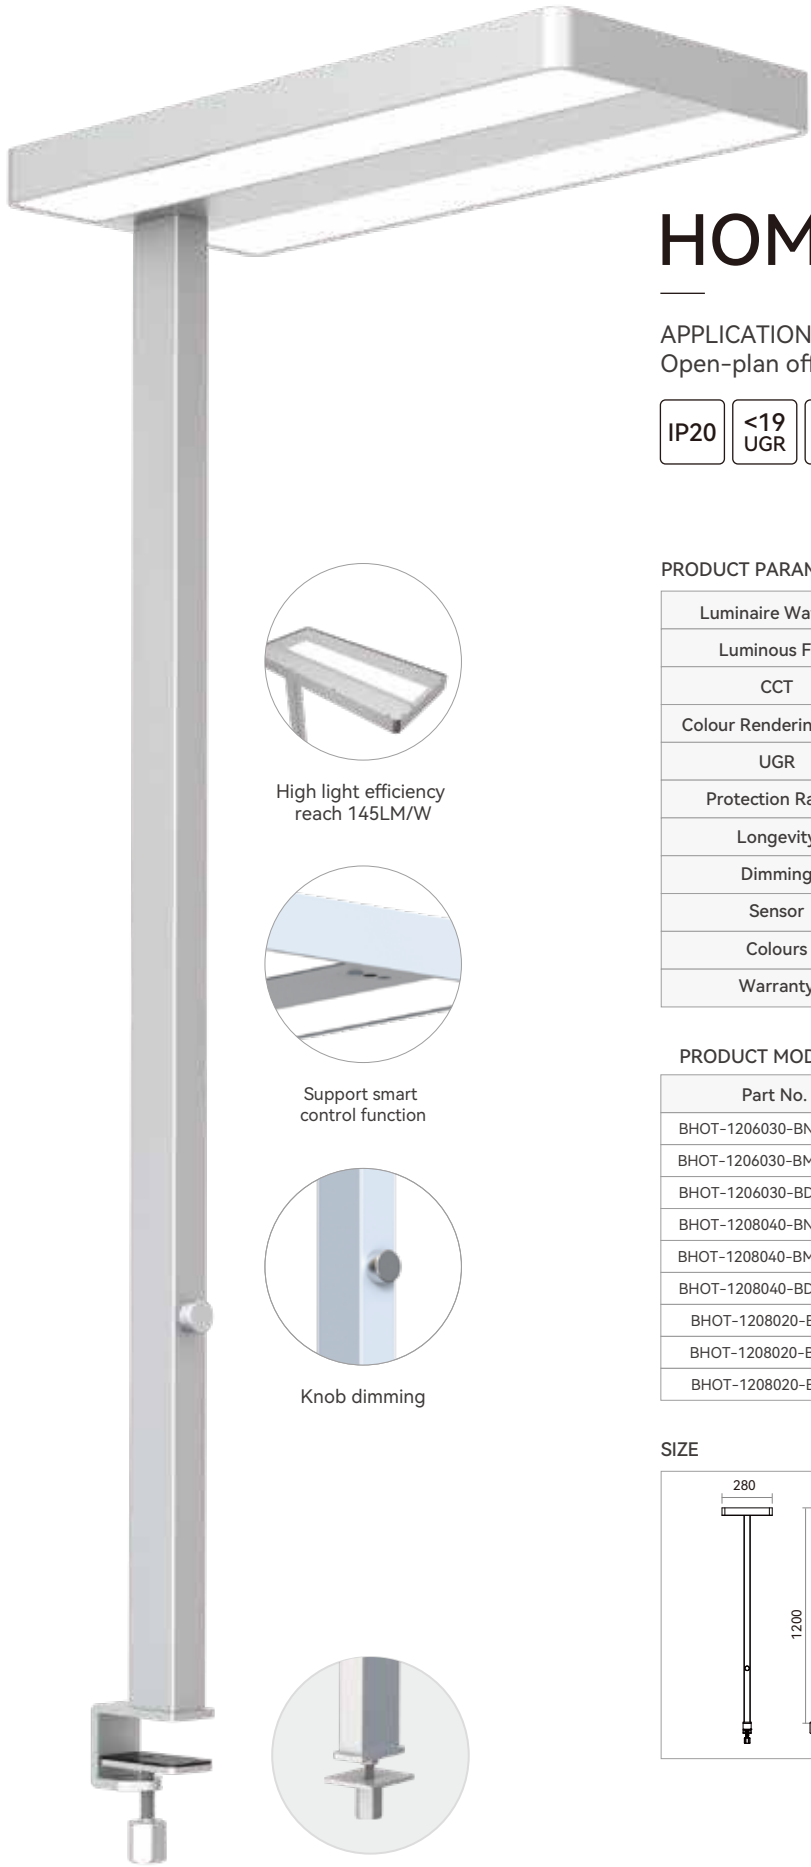

HOMET 3.0



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<19
UGR

Dimmable






PRODUCT PARAMETERS


Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		



High light efficiency
reach 145LM/W



Support smart
control function




Knob dimming




PRODUCT MODEL


Part No.	LM	Power	CCT
BHOT-1206030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1206030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1206030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1208040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOT-1208020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOT-1208020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

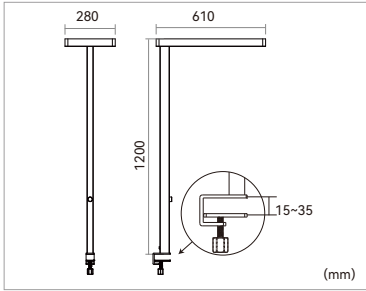

LIGHT DISTRIBUTION



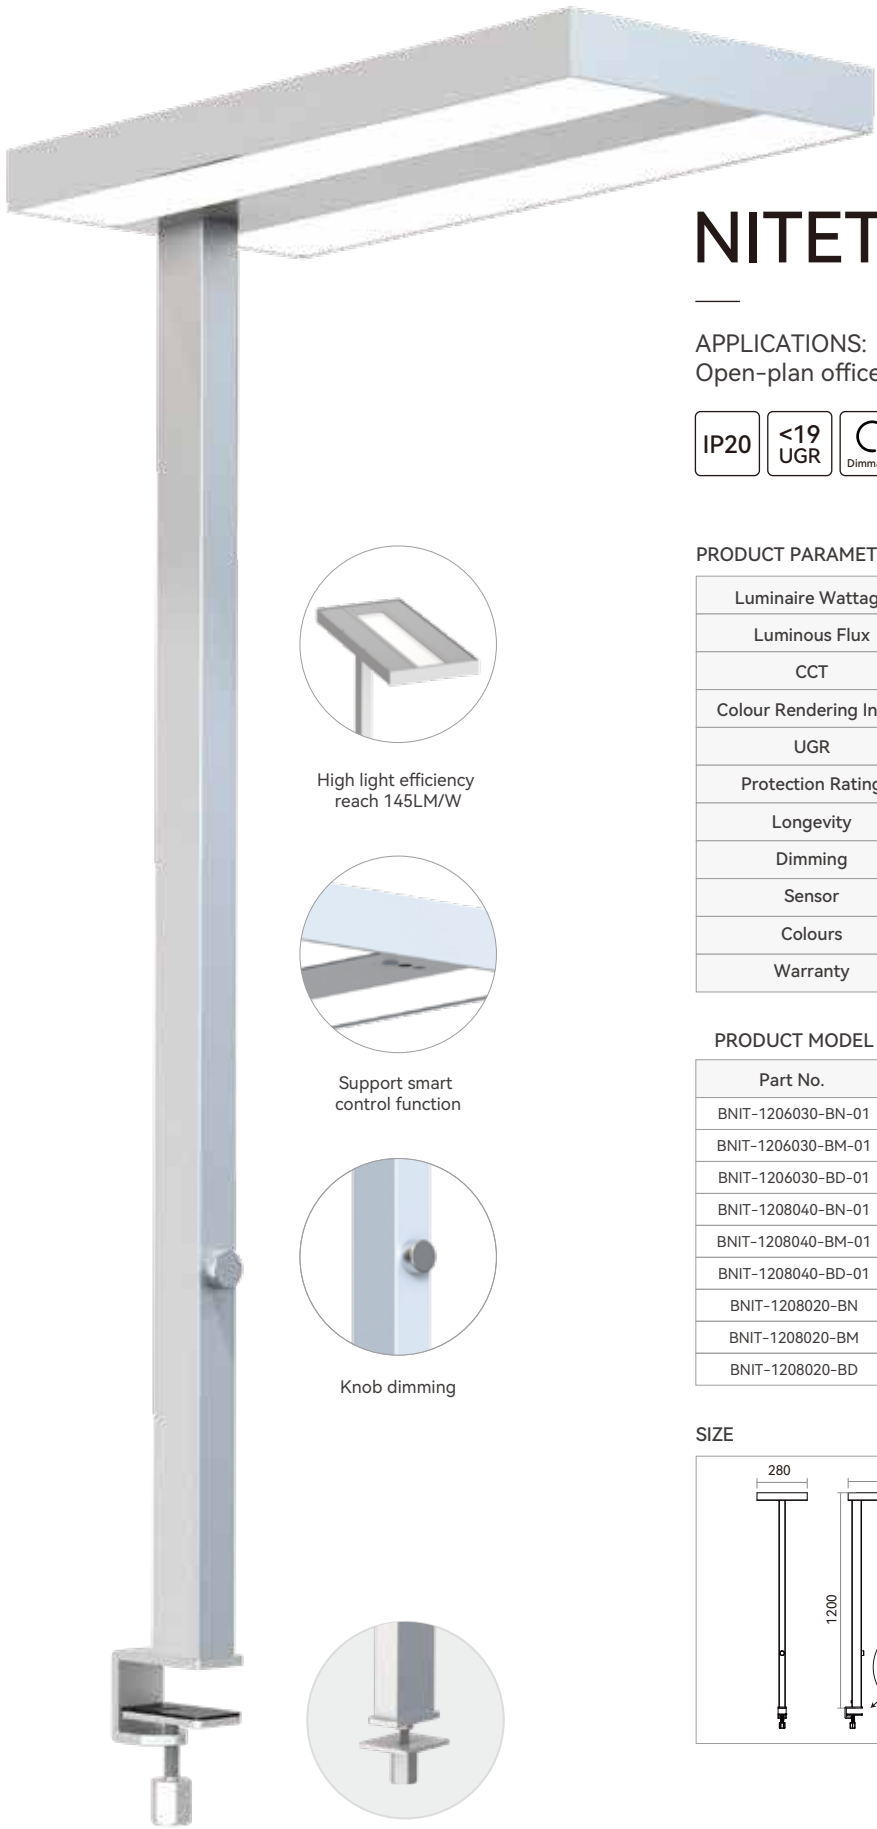

NITET 3.0



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<19
UGR

Dimmable






PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNIT-1206030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1206030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1206030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1208040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIT-1208020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIT-1208020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K


SIZE

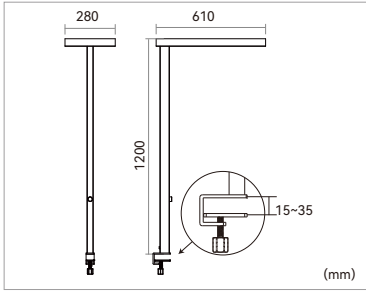


LIGHT DISTRIBUTION




High light efficiency
reach 145LM/W



Support smart
control function



Knob dimming





ELFOO-T 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<12
UGR

Dimmable

Tunable White

HCL system

CAS A MBi

SWIRL

CE

RoHS


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	10400lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BEFT-1208020-BD-01	↑ 8000lm/2400lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BEFT-1208020-CD-01	↑ 6600lm/2200lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

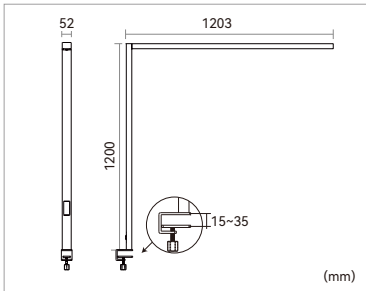

LIGHT DISTRIBUTION



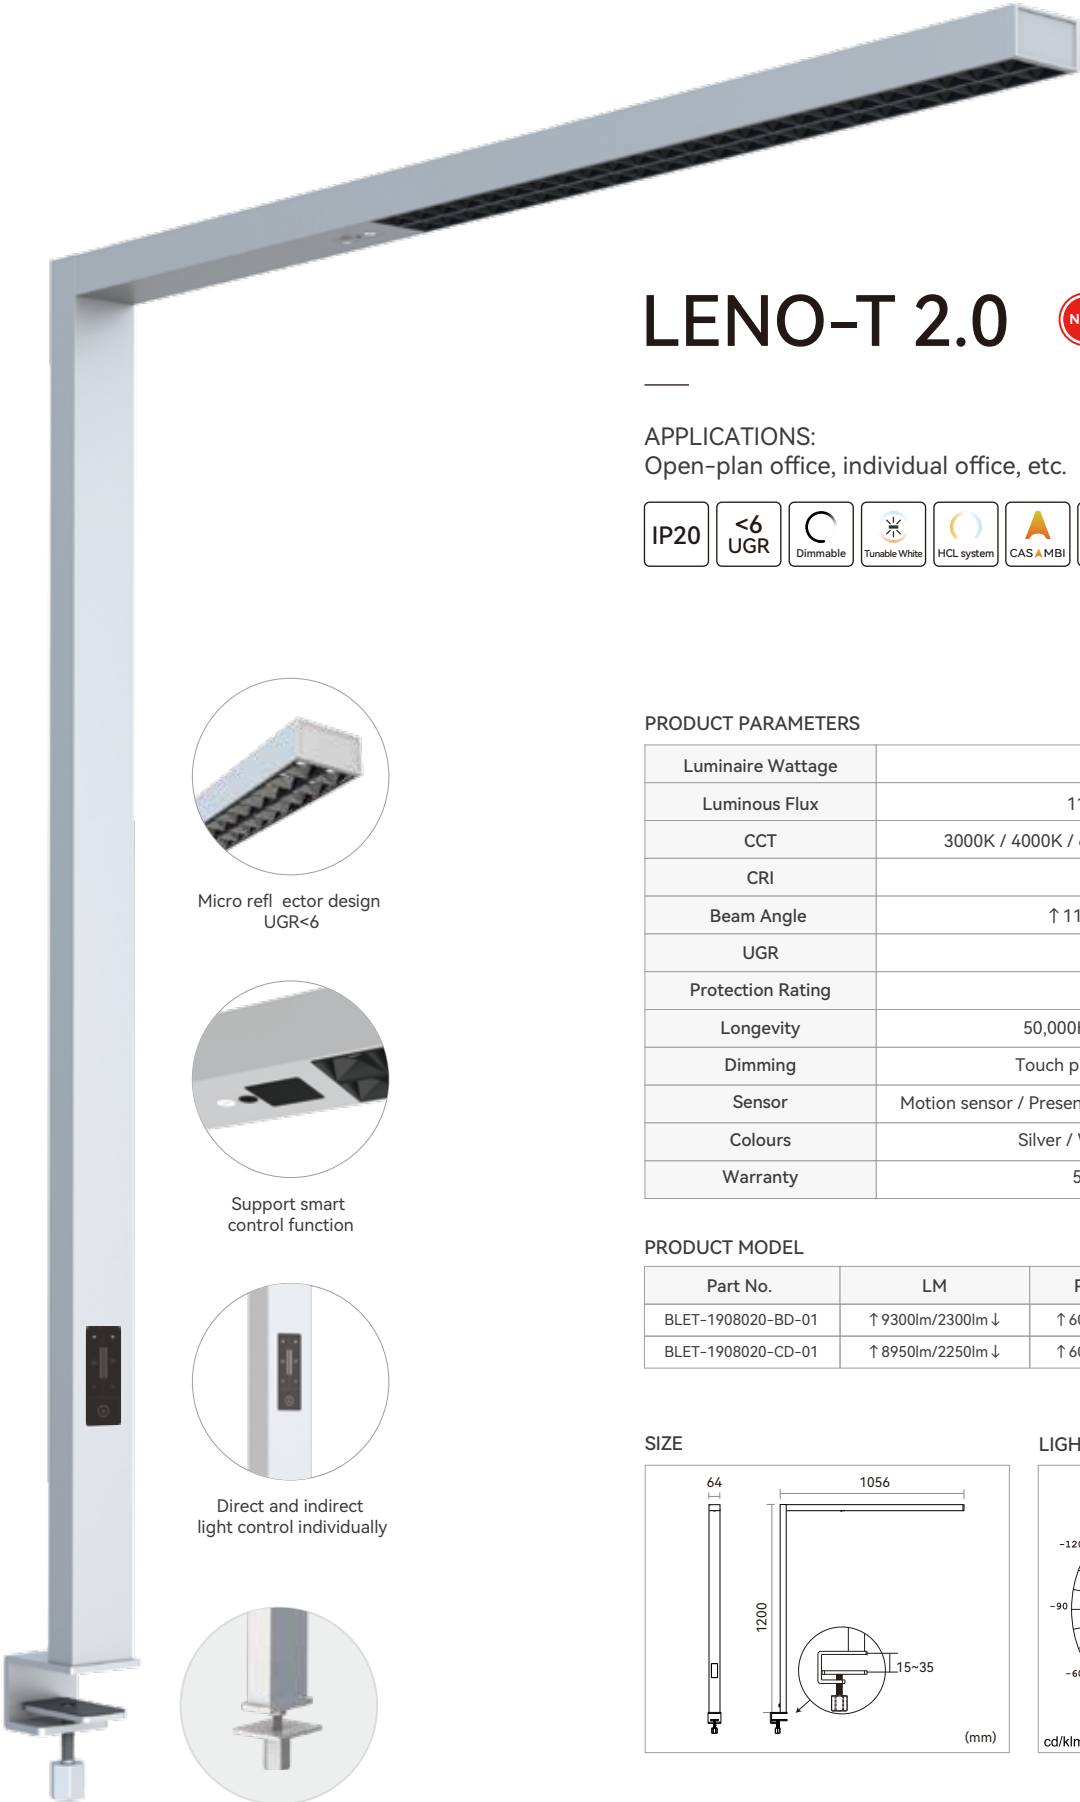

LENO-T 2.0

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<6 UGR

Dimmable

Tunable White

HCL system

CAS A+ MBI

SW2.0

CE

RoHS


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11600lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 50° ↓
UGR	<6
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Motion sensor / Presencesensor or Daylight sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BLET-1908020-BD-01	↑ 9300lm/2300lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BLET-1908020-CD-01	↑ 8950lm/2250lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

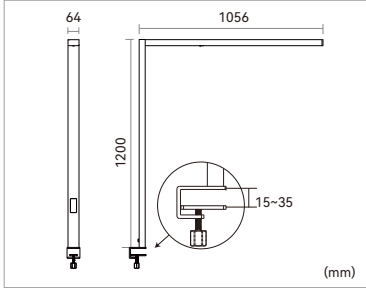

LIGHT DISTRIBUTION



03

PENDANT LUMINAIRES

APPLICATIONS:

Open-plan office, training room,
conference room and other office spaces.


MAYE Pro-PS




APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

130
LM/W

<19
UGR

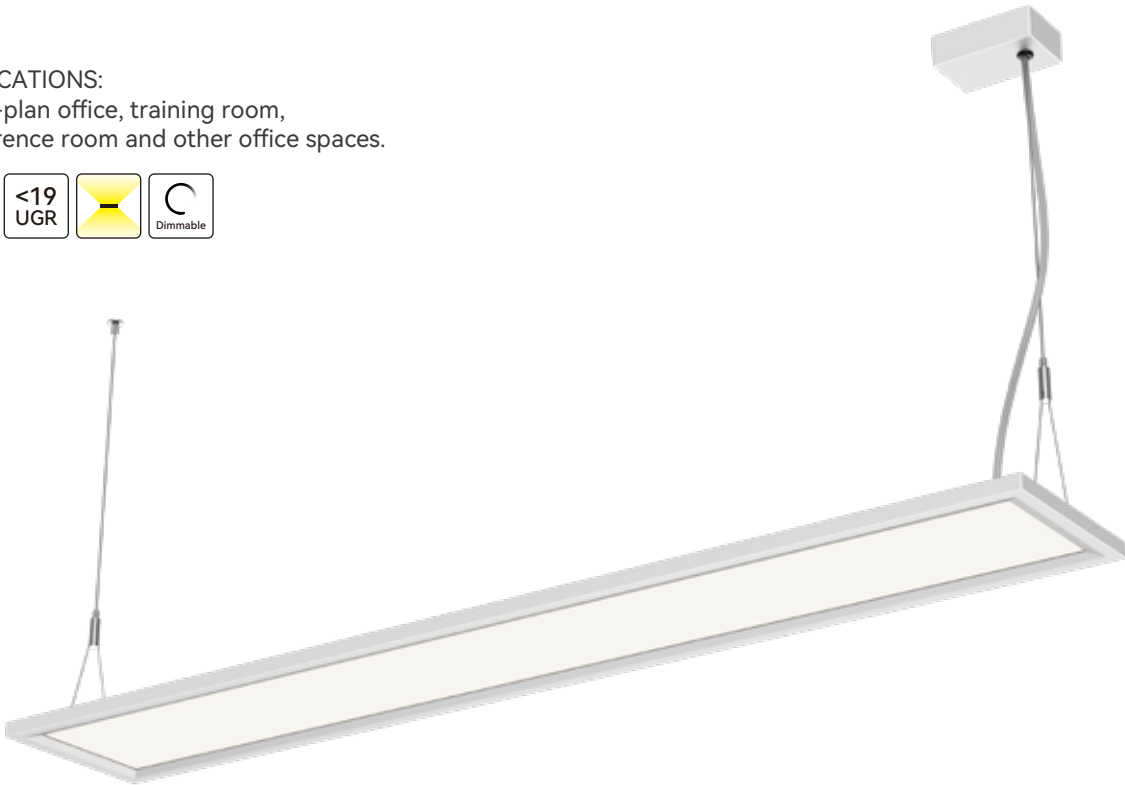

Large light-distribution
area for direct light
15mm ultra-thin
edge design



Structural polarization
design for indirect light



Support linkable
luminaires


PRODUCT PARAMETERS

Luminaire Wattage	60W	60W	70W
Luminous Flux	7800lm	8200lm	9450lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	↑ 110° / 80° ↓		
UGR	<19	<17	
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	Function
BMPP-1206030-NN	↑ 4500lm/3300lm ↓	↑ 30W/30W ↓	On/off
BMPP-1206030-DN	↑ 4500lm/3300lm ↓	↑ 30W/30W ↓	DALI dimming
BMPP-1206020-NN	↑ 6000lm/2200lm ↓	↑ 40W/20W ↓	On/off
BMPP-1206020-DN	↑ 6000lm/2200lm ↓	↑ 40W/20W ↓	DALI dimming
BMPP-1507028-NN	↑ 6370lm/3080lm ↓	↑ 42W/28W ↓	On/off
BMPP-1507028-DN	↑ 6370lm/3080lm ↓	↑ 42W/28W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



ROMAN-P0

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.


IP20

<15
UGR


Dimmable

CE

RoHS

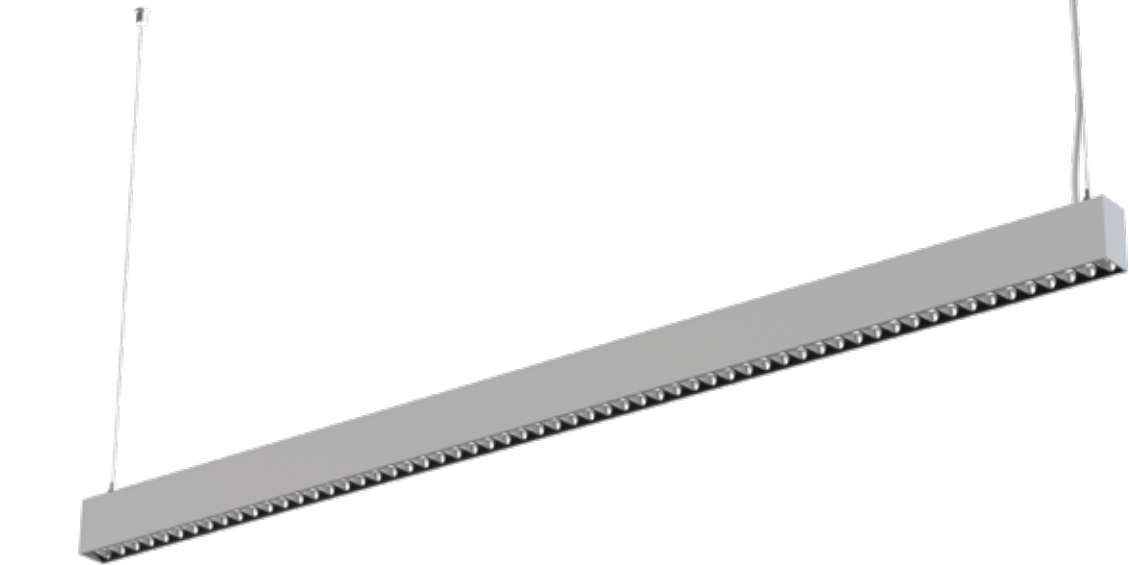

- Patent design, simple design style, rich texture
- Light efficiency up to 148lm/W
- Support DALI and 1-10V dimming

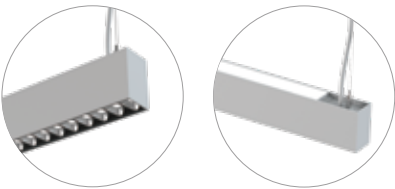


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	8910lm	10400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 115° / 60° ↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BROP0-1206024-NN	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	On/off
BROP0-1206024-VN	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	1-10V dimming
BROP0-1206024-DN	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	DALI dimming
BROP0-1507028-NN	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	On/off
BROP0-1507028-VN	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	1-10V dimming
BROP0-1507028-DN	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



ROMAN-P1



APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.

IP20

<6
UGR

Dimmable

CE

RoHS



- Patent design, simple design style, rich texture
- Light efficiency up to 150lm/W
- Support DALI and 1-10V dimming




PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	120W
Luminous Flux	9000lm	12000lm	18000lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	↑ 115° / 60° ↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / 1-10V dimming / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	Function
BROP1-6506024-NN	↑ 5900lm/3100lm ↓	↑ 36W/24W ↓	On/off
BROP1-6506024-VN	↑ 5900lm/3100lm ↓	↑ 36W/24W ↓	1-10V dimming
BROP1-6506024-DN	↑ 5900lm/3100lm ↓	↑ 36W/24W ↓	DALI dimming
BROP1-9008032-NN	↑ 7800lm/4200lm ↓	↑ 48W/32W ↓	On/off
BROP1-9008032-VN	↑ 7800lm/4200lm ↓	↑ 48W/32W ↓	1-10V dimming
BROP1-9008032-DN	↑ 7800lm/4200lm ↓	↑ 48W/32W ↓	DALI dimming
BROP1-1212048-NN	↑ 12000lm/6000lm ↓	↑ 72W/48W ↓	On/off
BROP1-1212048-VN	↑ 12000lm/6000lm ↓	↑ 72W/48W ↓	1-10V dimming
BROP1-1212048-DN	↑ 12000lm/6000lm ↓	↑ 72W/48W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



CELL-P1

NEW

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20

<19
UGR


Dimmable

CE

RoHS



- Patent design, simple design style, rich texture
- Light efficiency up to 116lm/W
- Support DALI and 1-10V dimming

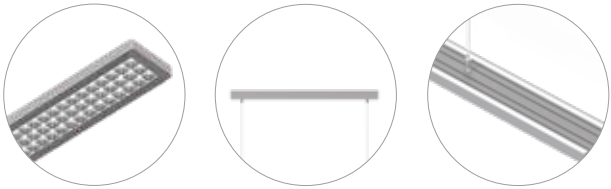


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7000lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BCEP1-1206025-NN	↑ 4500lm/2500lm ↓	↑ 35W/25W ↓	On/off
BCEP1-1206025-VN	↑ 4500lm/2500lm ↓	↑ 35W/25W ↓	1-10V dimming
BCEP1-1206025-DN	↑ 4500lm/2500lm ↓	↑ 35W/25W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



CELL-P2

NEW

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



IP20

<19
UGR

Dimmable

CE

RoHS

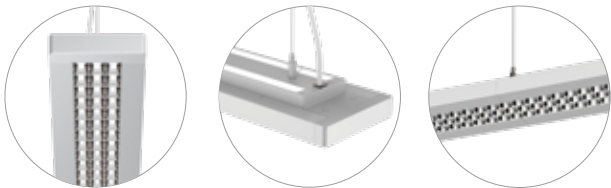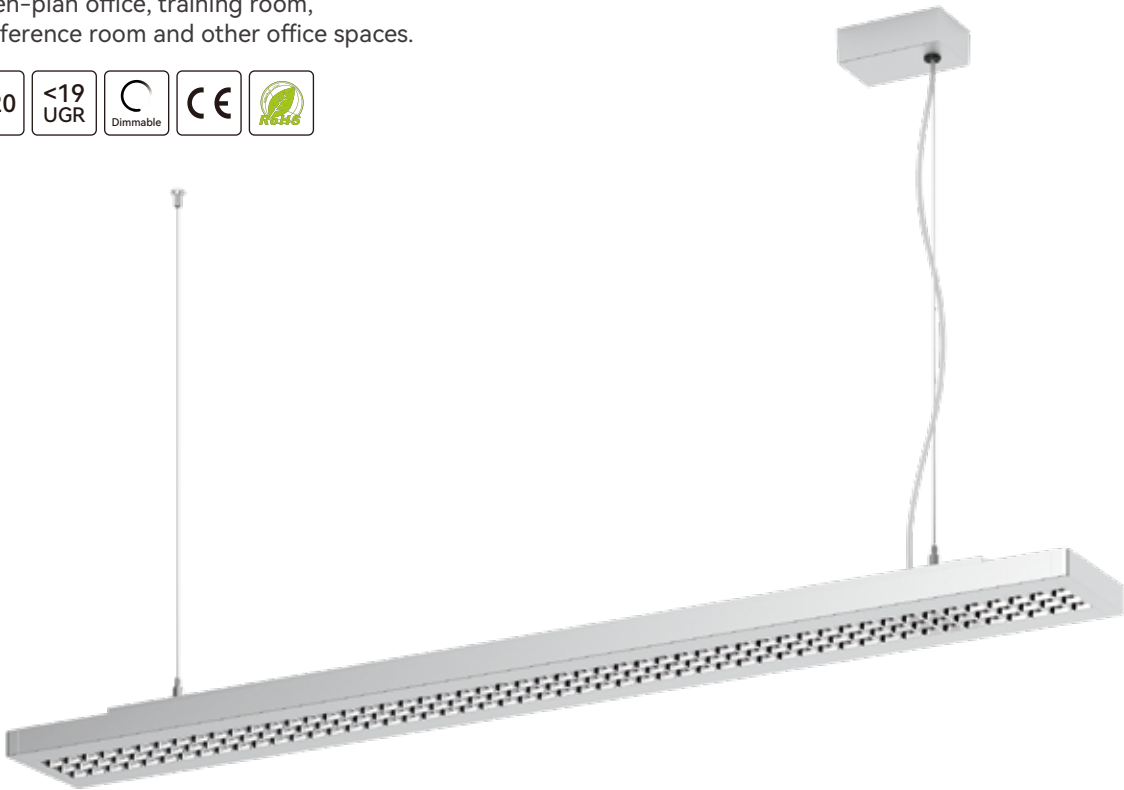

Anti-glare and square-shaped diffuser design, wide beam angle

Direct and indirect light

Support linkable luminaires


PRODUCT PARAMETERS

Luminaire Wattage	28W	35W	50W	63W
Luminous Flux	3080lm	3850lm	6500lm	8200lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<19			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

PRODUCT MODEL

Part No.	LM	Power	Function
BCEP2-1205020-NN	↑ 4300lm/2200lm ↓	↑ 30W/20W ↓	On/off
BCEP2-1205020-DN	↑ 4300lm/2200lm ↓	↑ 30W/20W ↓	DALI dimming
BCEP2-1202828-NN	3080lm ↓	28W ↓	On/off
BCEP2-1202828-DN	3080lm ↓	28W ↓	DALI dimming
BCEP2-1506325-NN	↑ 5450lm/2750lm ↓	↑ 38W/25W ↓	On/off
BCEP2-1506325-DN	↑ 5450lm/2750lm ↓	↑ 38W/25W ↓	DALI dimming
BCEP2-1503535-NN	3850lm ↓	35W ↓	On/off
BCEP2-1503535-DN	3850lm ↓	35W ↓	DALI dimming

SIZE



EZY-P

NEW

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.

IP20

<21
UGR


Dimmable

CE

RoHS



- Patent design, simple design style, rich texture
- Light efficiency up to 140lm/W
- Support DALI and 1-10V dimming

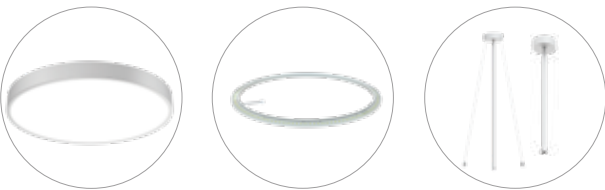


LIGHT DISTRIBUTION

Luminaire Wattage	18W	30W	30W	40W	48W
Luminous Flux	2340lm	3900lm	4000lm	5410lm	6720lm
CCT	3000K / 4000K / 6000K				
CRI	>80				
UGR	<19	<21	<19	<21	<19
Protection Rating	IP20				
Longevity	50,000Hrs L80 B10				
Function	On/off / 1-10V dimming / DALI dimming				
Colours	Silver / White / Black				
Warranty	5 years				


PRODUCT MODEL

Part No.	LM	Power	Function
BEZP-3501812-NN	↑ 1560lm/780lm ↓	↑ 6W/12W ↓	On/off
BEZP-3501812-VN	↑ 1560lm/780lm ↓	↑ 6W/12W ↓	1-10V dimming
BEZP-3501812-DN	↑ 1560lm/780lm ↓	↑ 6W/12W ↓	DALI dimming
BEZP-4503030-NN	3900lm ↓	30W ↓	On/off
BEZP-4503030-VN	3900lm ↓	30W ↓	1-10V dimming
BEZP-4503030-DN	3900lm ↓	30W ↓	DALI dimming
BEZP-4503021-NN	↑ 1250lm/2750lm ↓	↑ 9W/21W ↓	On/off
BEZP-4503021-VN	↑ 1250lm/2750lm ↓	↑ 9W/21W ↓	1-10V dimming
BEZP-4503021-DN	↑ 1250lm/2750lm ↓	↑ 9W/21W ↓	DALI dimming
BEZP-6004040-NN	5410lm ↓	40W ↓	On/off
BEZP-6004040-VN	5410lm ↓	40W ↓	1-10V dimming
BEZP-6004040-DN	5410lm ↓	40W ↓	DALI dimming
BEZP-6004834-NN	↑ 1500lm/5220lm ↓	↑ 14W/34W ↓	On/off
BEZP-6004834-VN	↑ 1500lm/5220lm ↓	↑ 14W/34W ↓	1-10V dimming
BEZP-6004834-DN	↑ 1500lm/5220lm ↓	↑ 14W/34W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



KEY-P

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



Light efficiency
could be 130LM/W


Flexible micropism plate
Flexible diffuser

Linkable and no
light leakage


PRODUCT PARAMETERS

Luminaire Wattage	30W	40W	50W		60W	
Luminous Flux	3600lm	4800lm	6250lm	6500lm	7500lm	7800lm
CCT	3000K / 4000K / 6000K					
CRI	>80					
Protection Rating	IP20					
Longevity	50,000Hrs L80 B10					
Function	On/off / 1-10V dimming / DALI dimming					
Colours	Silver / White / Black					
Warranty	5 years					

SIZE



LIGHT DISTRIBUTION



PRODUCT MODEL
UGR: <19

Part No.	LM	Power	Function
BKEP-1205015-NN	↑ 4550lm/1950lm ↓	↑ 35W/15W ↓	On/off
BKEP-1205015-VN	↑ 4550lm/1950lm ↓	↑ 35W/15W ↓	1-10V dimming
BKEP-1205015-DN	↑ 4550lm/1950lm ↓	↑ 35W/15W ↓	DALI dimming
BKEP-1506018-NN	↑ 5460lm/2340lm ↓	↑ 42W/18W ↓	On/off
BKEP-1506018-VN	↑ 5460lm/2340lm ↓	↑ 42W/18W ↓	1-10V dimming
BKEP-1506018-DN	↑ 5460lm/2340lm ↓	↑ 42W/18W ↓	DALI dimming

UGR: >19

Part No.	LM	Power	Function
BKEP-1205030-NN	↑ 2500lm/3750lm ↓	↑ 20W/30W ↓	On/off
BKEP-1205030-VN	↑ 2500lm/3750lm ↓	↑ 20W/30W ↓	1-10V dimming
BKEP-1205030-DN	↑ 2500lm/3750lm ↓	↑ 20W/30W ↓	DALI dimming
BKEP-1506036-NN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	On/off
BKEP-1506036-VN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	1-10V dimming
BKEP-1506036-DN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	DALI dimming
BKEP-1203030-NN	3600lm ↓	30W ↓	On/off
BKEP-1203030-VN	3600lm ↓	30W ↓	1-10V dimming
BKEP-1203030-DN	3600lm ↓	30W ↓	DALI dimming
BKEP-1504040-NN	4800lm ↓	40W ↓	On/off
BKEP-1504040-VN	4800lm ↓	40W ↓	1-10V dimming
BKEP-1504040-DN	4800lm ↓	40W ↓	DALI dimming



NIO

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.


IP20

<6
UGR

Dimmable

CE

RoHS

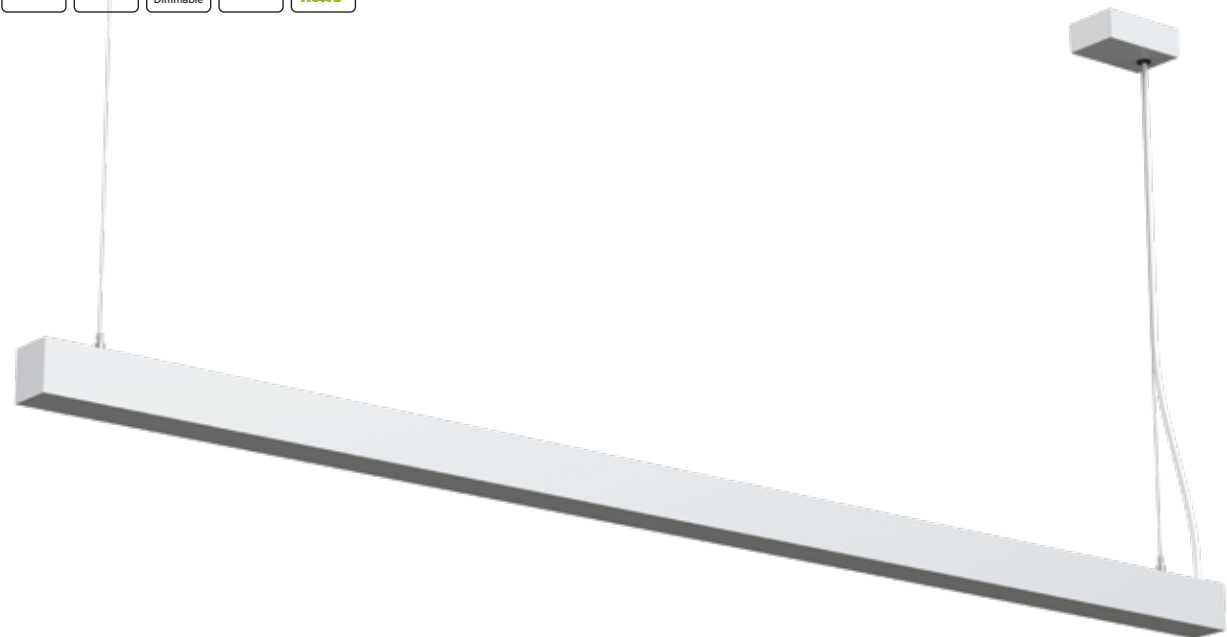


UGR<6
Only indirect light
No direct glare

Light efficiency
reach to145LM/W
Easy installation and linkable

PRODUCT PARAMETERS	
Luminaire Wattage	70W
Luminous Flux	10150lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<6
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years

PRODUCT MODEL			
Part No.	LM	Power	Function
BNIP-1507000-NN	↑ 10150 lm	70W	On/off
BNIP-1507000-VN	↑ 10150 lm	70W	1-10V dimming
BNIP-1507000-DN	↑ 10150 lm	70W	DALI dimming

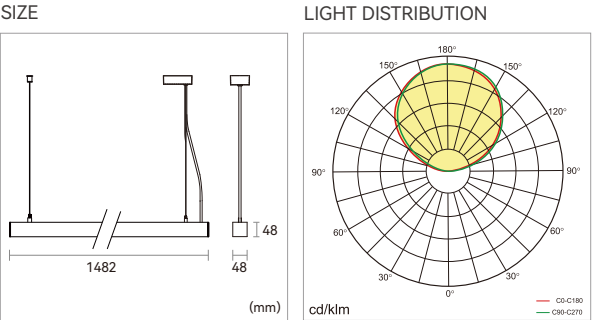

FREE-P

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



IP20

<19
UGR

Dimmable

CE

RoHS

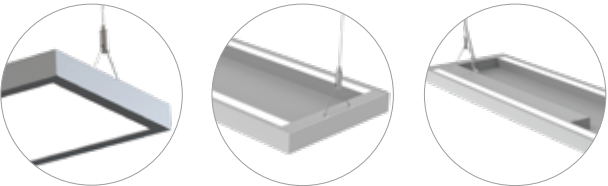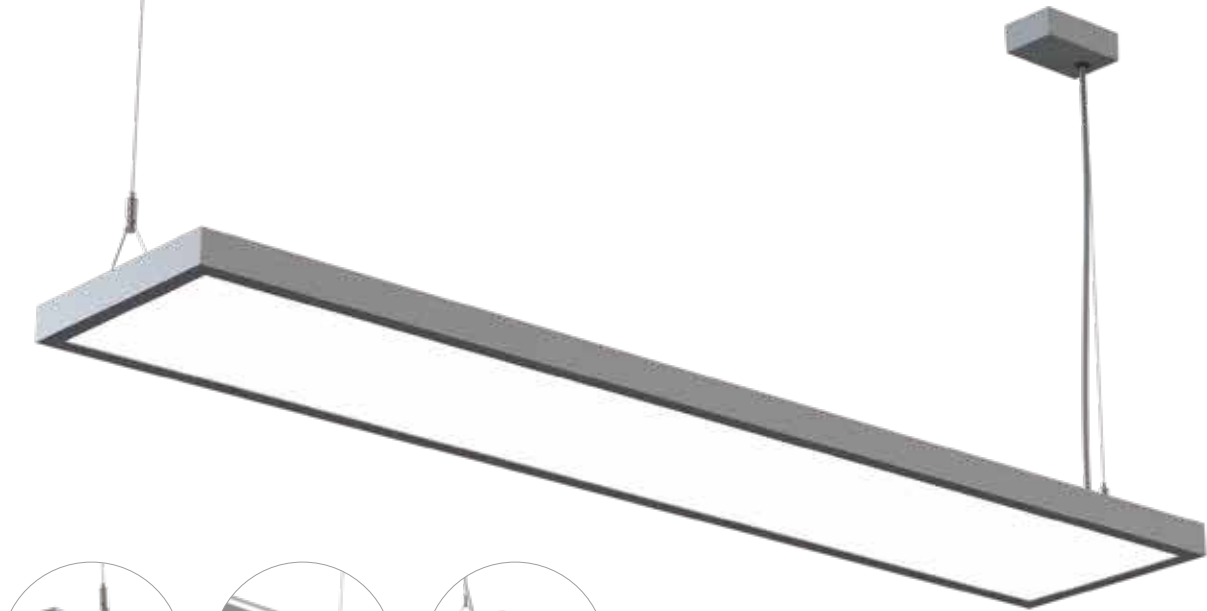

Microprism
UGR<19

Direct and indirect
lighting with impressive
light uniformity

Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6350lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BFRP-1205030-NN	↑ 2700lm/3650lm ↓	↑ 20W/30W ↓	On/off
BFRP-1205030-VN	↑ 2700lm/3650lm ↓	↑ 20W/30W ↓	1-10V dimming
BFRP-1205030-DN	↑ 2700lm/3650lm ↓	↑ 20W/30W ↓	DALI dimming
BFRP-1506036-NN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	On/off
BFRP-1506036-VN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	1-10V dimming
BFRP-1506036-DN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	DALI dimming

SIZE





LIGHT DISTRIBUTION




PECO

APPLICATIONS:
Corridor

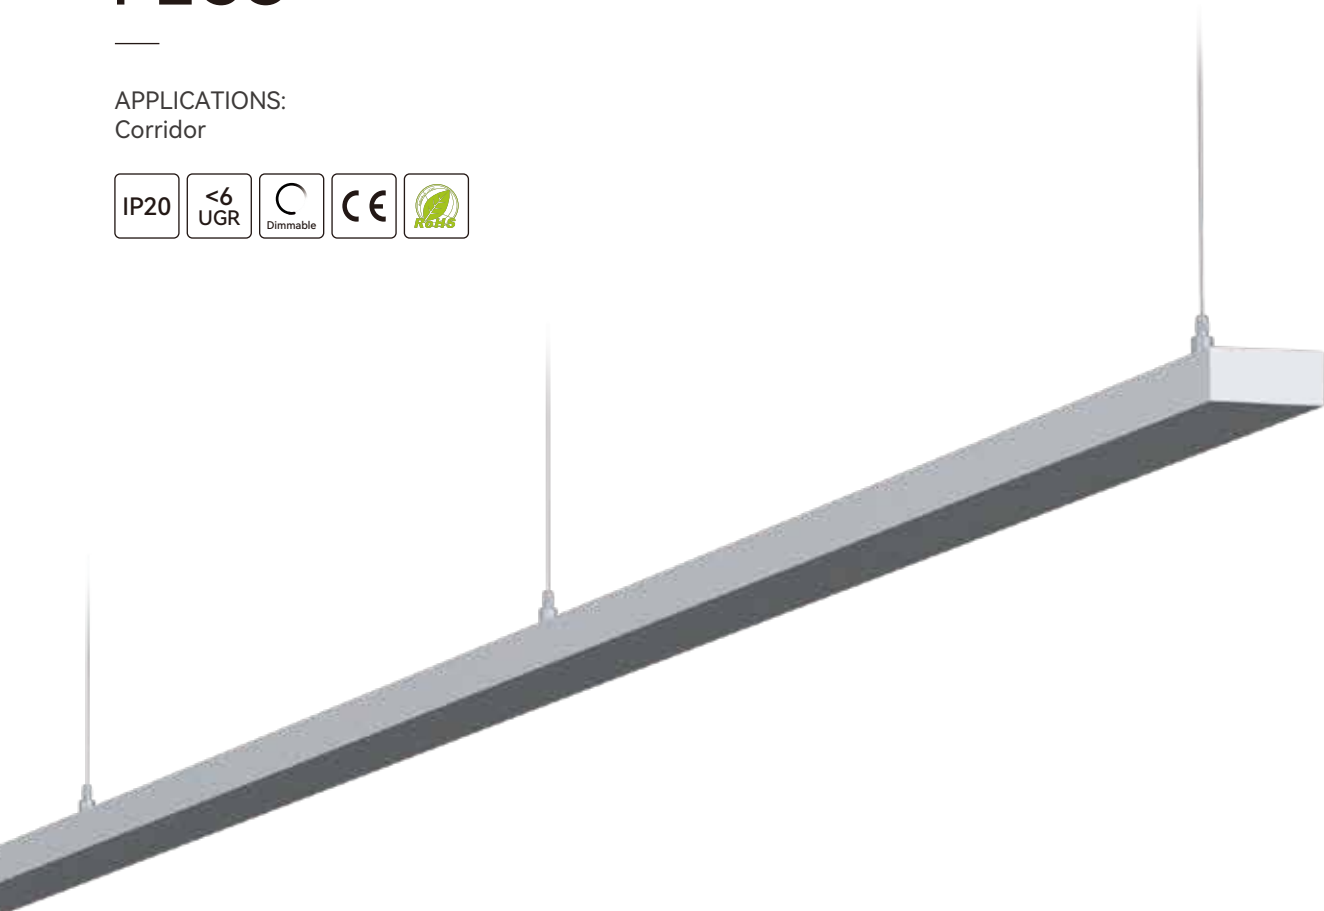

160° indirect light,
provide comfortable
lighting for the corridor



Easy to connect
and link, fast
for installation



One driver can
support 40
meters fixtures


PRODUCT PARAMETERS

Luminaire Wattage	10W
Luminous Flux	1000lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<6
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off
Sensor	Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BPEP-1201000-NN	↑ 1000 lm	10W	On/off
BPEP-1201000-NM	↑ 1000 lm	10W	On/off

SIZE



LIGHT DISTRIBUTION



ROMI-P

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



Microprism
UGR<18



Extremely simple for
installation and
maintenance



Pole suspension and
wire suspension
for option


LIGHT DISTRIBUTION

Luminaire Wattage	18W	30W	48W	80W
Luminous Flux	1700lm	3300lm	5760lm	9600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<18			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL

Part No.	LM	Power	Function
BROP-3501812-NN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	On/off
BROP-3501812-VN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	1-10V dimming
BROP-3501812-DN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	DALI dimming
BROP-4503021-NN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	On/off
BROP-4503021-VN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	1-10V dimming
BROP-4503021-DN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	DALI dimming
BROP-6004834-NN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	On/off
BROP-6004834-VN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	1-10V dimming
BROP-6004834-DN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	DALI dimming
BROP-9008056-NN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	On/off
BROP-9008056-VN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	1-10V dimming
BROP-9008056-DN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	DALI dimming

SIZE





LIGHT DISTRIBUTION



ELFOO-P

APPLICATIONS:
Open-plan office, individual office,
cafeteria, training room, classroom, etc.

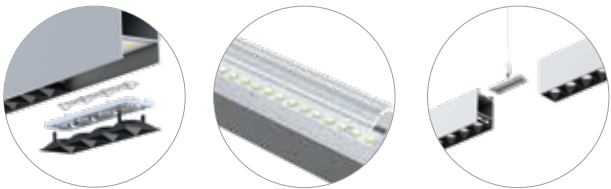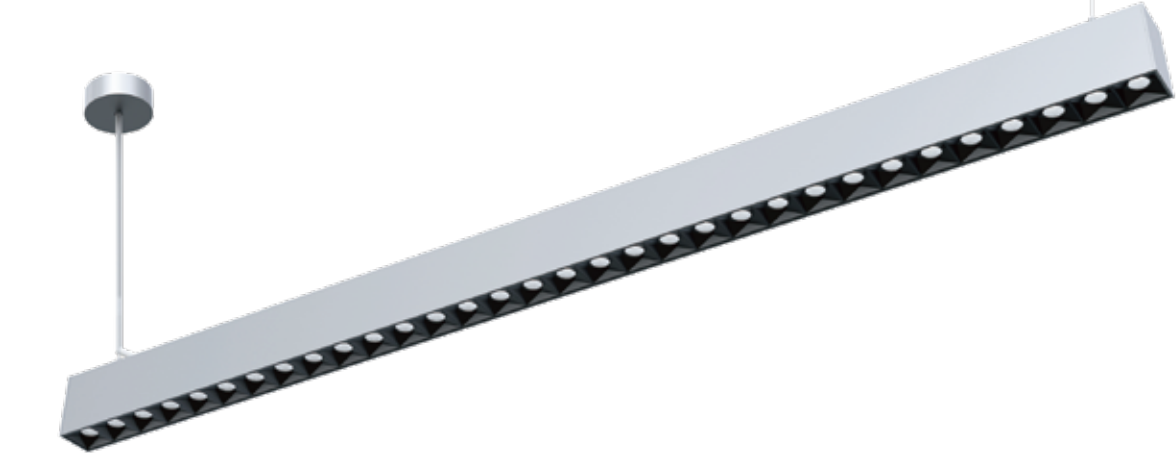

Wide beam angle with professional glare control design, UGR<15

140° upward light output to provide comfortable lighting for the space

No gap and no light come out from connection parts when linked together


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6300lm	7400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 140° / 75° ↓ or ↑ 140° / 50° ↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFP-1206024-NN	↑ 3500lm/2800lm ↓	↑ 36W/24W ↓	On/off
BEFP-1206024-VN	↑ 3500lm/2800lm ↓	↑ 36W/24W ↓	1-10V dimming
BEFP-1206024-DN	↑ 3500lm/2800lm ↓	↑ 36W/24W ↓	DALI dimming
BEFP-1507028-NN	↑ 4100lm/3300lm ↓	↑ 42W/28W ↓	On/off
BEFP-1507028-VN	↑ 4100lm/3300lm ↓	↑ 42W/28W ↓	1-10V dimming
BEFP-1507028-DN	↑ 4100lm/3300lm ↓	↑ 42W/28W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



LENO-P0

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



Micro reflector design UGR<6 Simple and rich textured design, hidden AC cable Support DALI and 1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6400lm	7600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 115° / 50° ↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEP0-1206030-NN	↑ 3200lm/3200lm ↓	↑ 30W/30W ↓	On/off
BLEP0-1206030-VN	↑ 3200lm/3200lm ↓	↑ 30W/30W ↓	1-10V dimming
BLEP0-1206030-DN	↑ 3200lm/3200lm ↓	↑ 30W/30W ↓	DALI dimming
BLEP0-1507035-NN	↑ 3800lm/3800lm ↓	↑ 35W/35W ↓	On/off
BLEP0-1507035-VN	↑ 3800lm/3800lm ↓	↑ 35W/35W ↓	1-10V dimming
BLEP0-1507035-DN	↑ 3800lm/3800lm ↓	↑ 35W/35W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION



LENO-P1

APPLICATIONS:
Open-plan office, individual office,
small meeting room, reception etc.

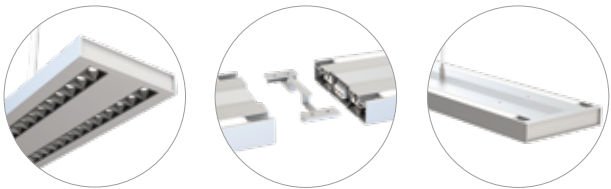

Micro reflector design UGR<6 No gap and no light come out from connection parts when linked together Support DALI and 1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6700lm	7750lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 115° / 50° ↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEP1-1206030-NN	↑ 3400lm/3300lm ↓	↑ 30W/30W ↓	On/off
BLEP1-1206030-VN	↑ 3400lm/3300lm ↓	↑ 30W/30W ↓	1-10V dimming
BLEP1-1206030-DN	↑ 3400lm/3300lm ↓	↑ 30W/30W ↓	DALI dimming
BLEP1-1507035-NN	↑ 3950lm/3800lm ↓	↑ 35W/35W ↓	On/off
BLEP1-1507035-VN	↑ 3950lm/3800lm ↓	↑ 35W/35W ↓	1-10V dimming
BLEP1-1507035-DN	↑ 3950lm/3800lm ↓	↑ 35W/35W ↓	DALI dimming

SIZE





LIGHT DISTRIBUTION



LENO-P2


APPLICATIONS:
Open-plan office, individual office,
small meeting room, reception, etc.

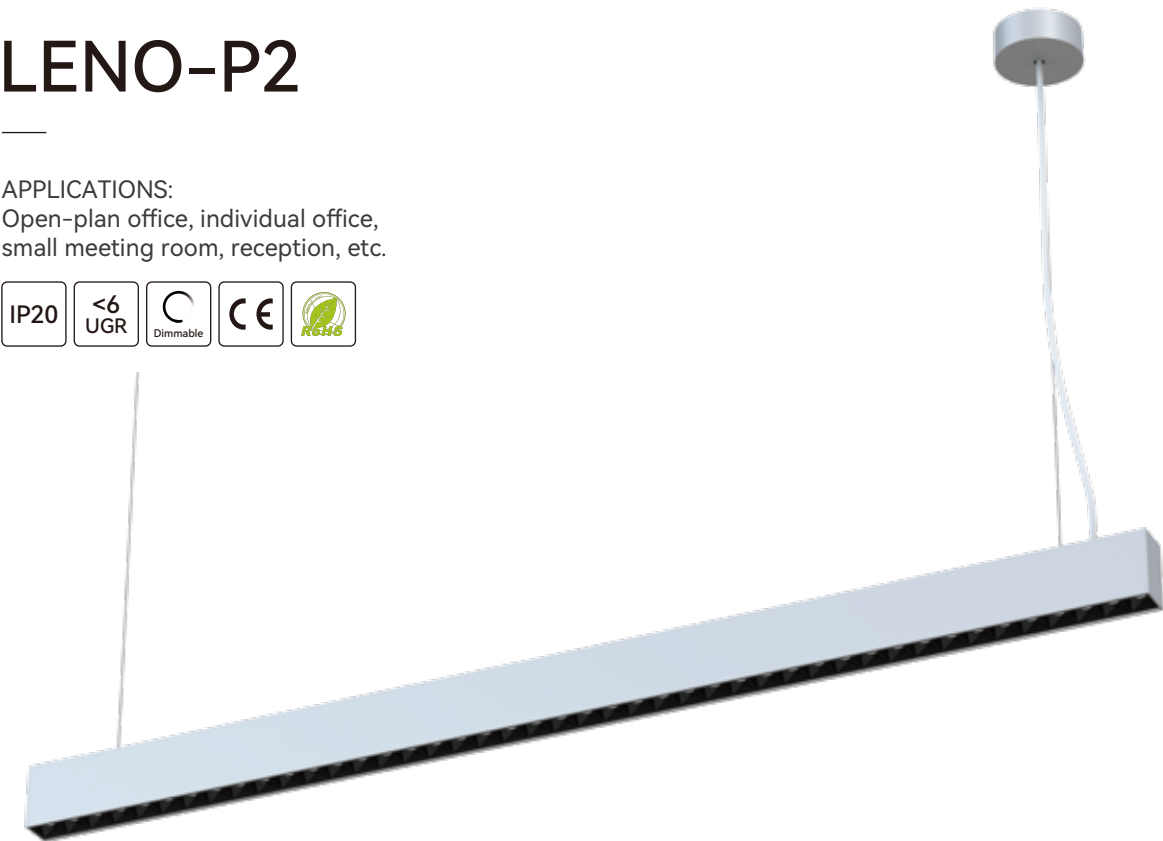

Micro reflector design
UGR<6



Linkable design



Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6250lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 115° / 50° ↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEP2-1205025-NN	↑ 3350lm/2900lm ↓	↑ 25W/25W ↓	On/off
BLEP2-1205025-VN	↑ 3350lm/2900lm ↓	↑ 25W/25W ↓	1-10V dimming
BLEP2-1205025-DN	↑ 3350lm/2900lm ↓	↑ 25W/25W ↓	DALI dimming
BLEP2-1506030-NN	↑ 4000lm/3500lm ↓	↑ 30W/30W ↓	On/off
BLEP2-1506030-VN	↑ 4000lm/3500lm ↓	↑ 30W/30W ↓	1-10V dimming
BLEP2-1506030-DN	↑ 4000lm/3500lm ↓	↑ 30W/30W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION



MAYE-PR

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.

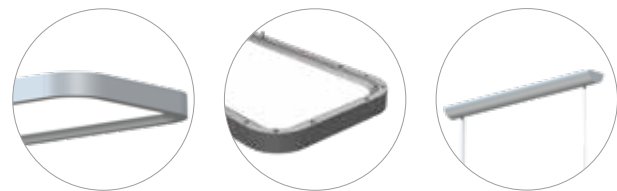

Direct and indirect
lighting with impressive
light uniformity

Microprism
UGR<19

Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	6000 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMRP-1206040-NN	↑ 2000lm/4000lm ↓	↑ 20W/40W ↓	On/off
BMRP-1206040-VN	↑ 2000lm/4000lm ↓	↑ 20W/40W ↓	1-10V dimming
BMRP-1206040-DN	↑ 2000lm/4000lm ↓	↑ 20W/40W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



MAYE-PS

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



Direct and indirect lighting with impressive light uniformity

Microprism UGR<19

Support DALI and 1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	6000 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMSP-1206040-NN	↑ 2000lm/4000lm ↓	↑ 20W/40W ↓	On/off
BMSP-1206040-VN	↑ 2000lm/4000lm ↓	↑ 20W/40W ↓	1-10V dimming
BMSP-1206040-DN	↑ 2000lm/4000lm ↓	↑ 20W/40W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION




LICON-P

APPLICATIONS:
Open-plan office, individual office,
meeting room, guestroom etc.

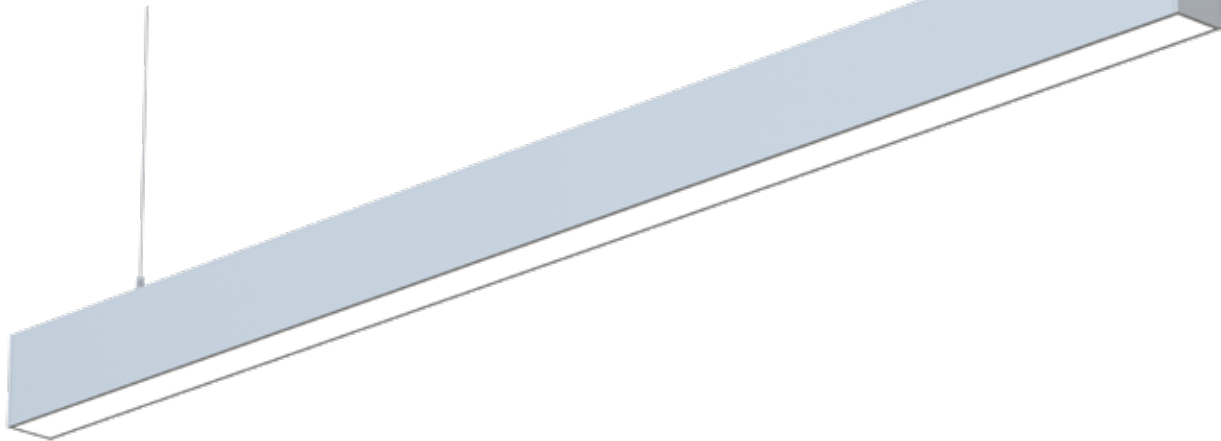

- Simple and rich textured design
- Support DALI and 1-10V dimming
- Simple, easy and quick installation

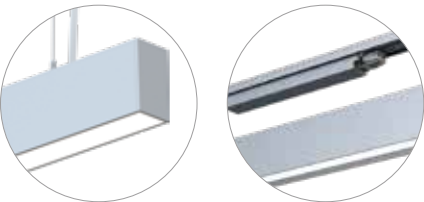


PRODUCT PARAMETERS

Luminaire Wattage	40W	48W	50W	60W
Luminous Flux	3600lm	5300lm	4500lm	6600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<21			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL

Part No.	LM	Power	Function
BLIP-1204832-NN	↑ 2400lm/2900lm ↓	↑ 16W/32W ↓	On/off
BLIP-1204832-VN	↑ 2400lm/2900lm ↓	↑ 16W/32W ↓	1-10V dimming
BLIP-1204832-DN	↑ 2400lm/2900lm ↓	↑ 16W/32W ↓	DALI dimming
BLIP-1506040-NN	↑ 3000lm/3600lm ↓	↑ 20W/40W ↓	On/off
BLIP-1506040-VN	↑ 3000lm/3600lm ↓	↑ 20W/40W ↓	1-10V dimming
BLIP-1506040-DN	↑ 3000lm/3600lm ↓	↑ 20W/40W ↓	DALI dimming
BLIP-1204040-NN	3600lm ↓	40W ↓	On/off
BLIP-1204040-VN	3600lm ↓	40W ↓	1-10V dimming
BLIP-1204040-DN	3600lm ↓	40W ↓	DALI dimming
BLIP-1505050-NN	4500lm ↓	50W ↓	On/off
BLIP-1505050-VN	4500lm ↓	50W ↓	1-10V dimming
BLIP-1505050-DN	4500lm ↓	50W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION




04

SURFACE MOUNTED LUMINAIRES

APPLICATIONS:

Open-plan office, reception,
training room, cafeteria, etc.

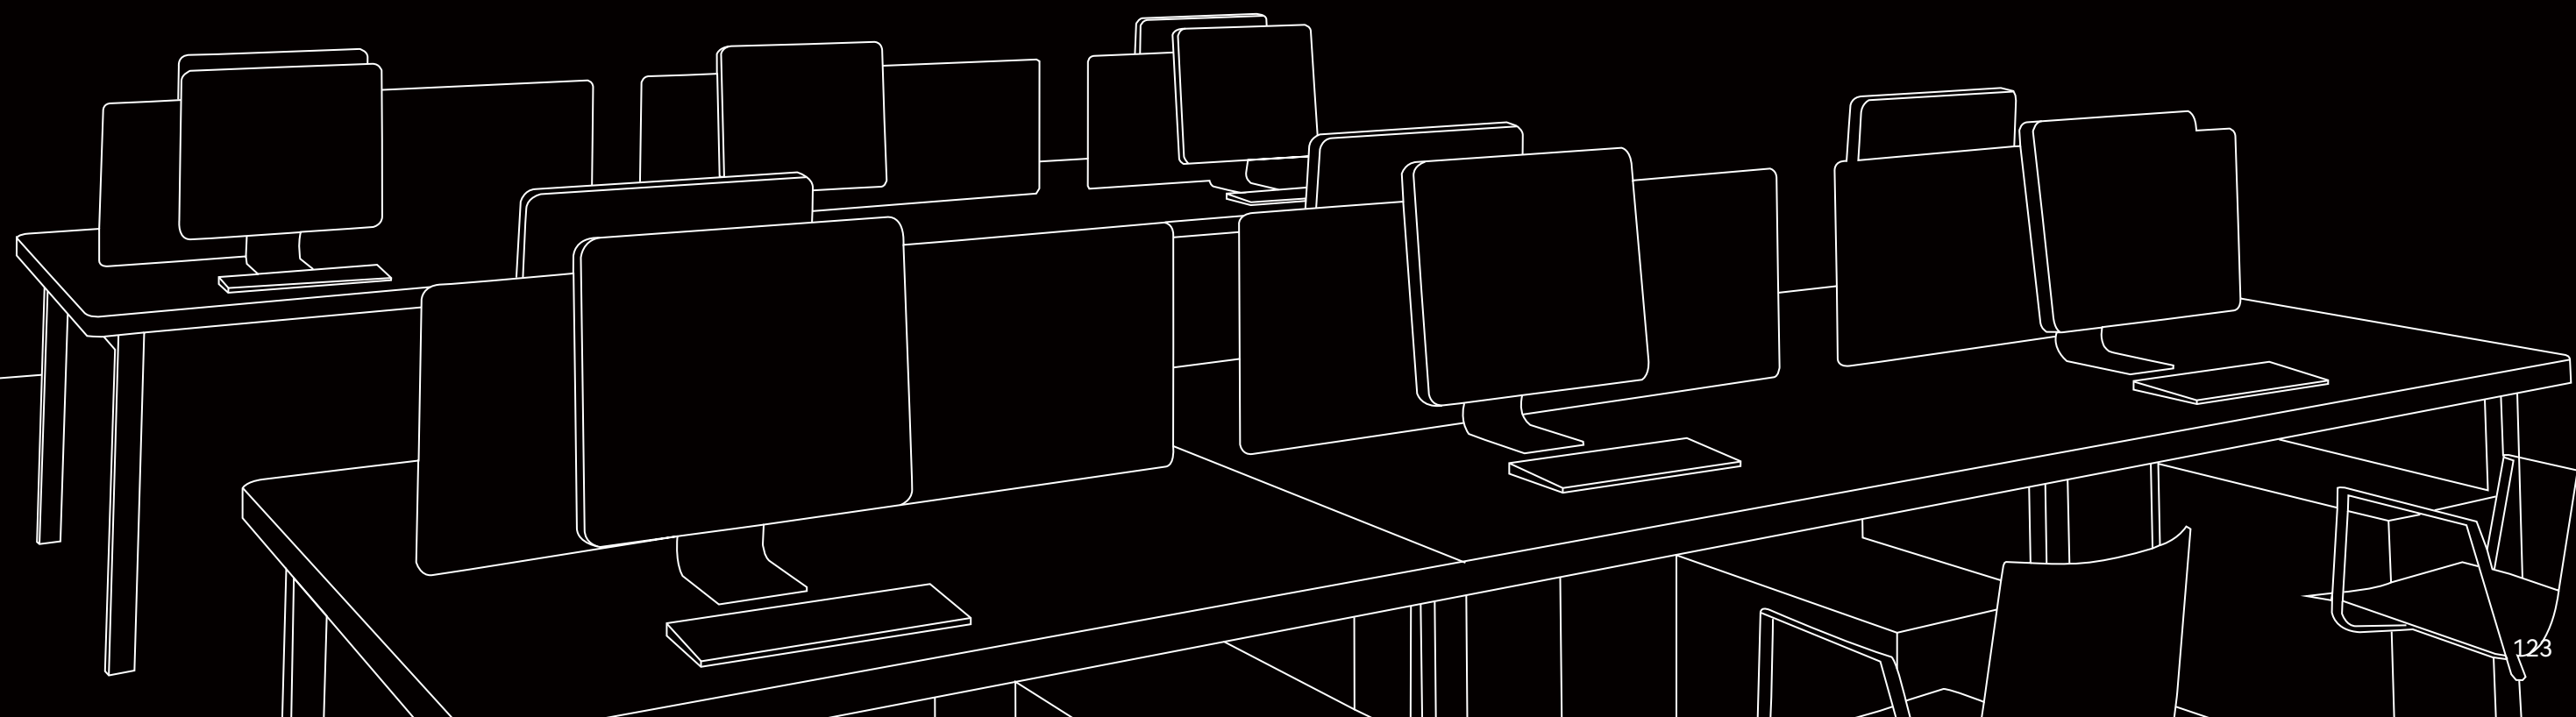

EZY-C

NEW

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.

IP20

<21
UGR


Dimmable

CE

RoHS



Patent design, simple design style, rich texture
Light efficiency up to 140lm/W
Support DALI and 1-10V dimming

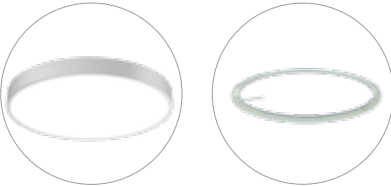


LIGHT DISTRIBUTION

Luminaire Wattage	18W	30W	30W	40W	48W
Luminous Flux	2340lm	3900lm	4000lm	5410lm	6720lm
CCT	3000K / 4000K / 6000K				
CRI	>80				
UGR	<19	<21	<19	<21	<19
Protection Rating	IP20				
Longevity	50,000Hrs L80 B10				
Function	On/off / 1-10V dimming / DALI dimming				
Colours	Silver / White / Black				
Warranty	5 years				


PRODUCT MODEL

Part No.	LM	Power	Function
BEZC-3501812-NN	↑ 1560lm/780lm ↓	↑ 6W/12W ↓	On/off
BEZC-3501812-VN	↑ 1560lm/780lm ↓	↑ 6W/12W ↓	1-10V dimming
BEZC-3501812-DN	↑ 1560lm/780lm ↓	↑ 6W/12W ↓	DALI dimming
BEZC-4503030-NN	3900lm ↓	30W ↓	On/off
BEZC-4503030-VN	3900lm ↓	30W ↓	1-10V dimming
BEZC-4503030-DN	3900lm ↓	30W ↓	DALI dimming
BEZC-4503021-NN	↑ 1250lm/2750lm ↓	↑ 9W/21W ↓	On/off
BEZC-4503021-VN	↑ 1250lm/2750lm ↓	↑ 9W/21W ↓	1-10V dimming
BEZC-4503021-DN	↑ 1250lm/2750lm ↓	↑ 9W/21W ↓	DALI dimming
BEZC-6004040-NN	5410lm ↓	40W ↓	On/off
BEZC-6004040-VN	5410lm ↓	40W ↓	1-10V dimming
BEZC-6004040-DN	5410lm ↓	40W ↓	DALI dimming
BEZC-6004834-NN	↑ 1500lm/5220lm ↓	↑ 14W/34W ↓	On/off
BEZC-6004834-VN	↑ 1500lm/5220lm ↓	↑ 14W/34W ↓	1-10V dimming
BEZC-6004834-DN	↑ 1500lm/5220lm ↓	↑ 14W/34W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



KEY-C



APPLICATIONS:
Open-plan office, reception room,
training room, cafeteria, etc.



Light efficiency could be 120LM/W Flexible microprism plate Linkable and no light leakage


PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	4800lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BKEC-1204040-NN	4800lm	40W	On/off
BKEC-1204040-VN	4800lm	40W	1-10V dimming
BKEC-1204040-DN	4800lm	40W	DALI dimming
BKEC-1505050-NN	6000lm	50W	On/off
BKEC-1505050-VN	6000lm	50W	1-10V dimming
BKEC-1505050-DN	6000lm	50W	DALI dimming

SIZE

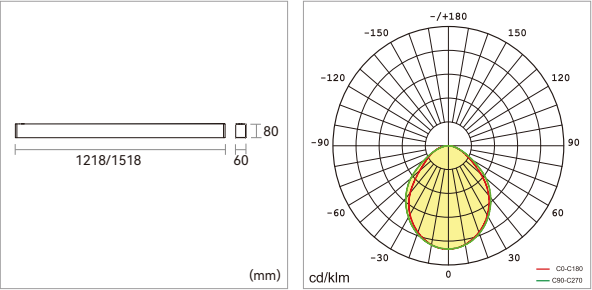

FREE-C

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.


IP20

<19
UGR

Dimmable

CE

RoHS

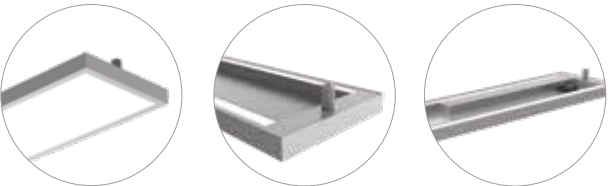

Microprism
UGR<19

Direct and Indirect
lighting with impressive
light uniformity

Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	5200lm	6300lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BFRC-1205040-NN	↑ 1300lm/3900lm ↓	↑ 10W / 40W ↓	On/off
BFRC-1205040-VN	↑ 1300lm/3900lm ↓	↑ 10W / 40W ↓	1-10V dimming
BFRC-1205040-DN	↑ 1300lm/3900lm ↓	↑ 10W / 40W ↓	DALI dimming
BFRC-1506048-NN	↑ 1500lm/4800lm ↓	↑ 12W / 48W ↓	On/off
BFRC-1506048-VN	↑ 1500lm/4800lm ↓	↑ 12W / 48W ↓	1-10V dimming
BFRC-1506048-DN	↑ 1500lm/4800lm ↓	↑ 12W / 48W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION



WASE-C

APPLICATIONS:
Open-plan office, training
room, stairway, corridors, etc.

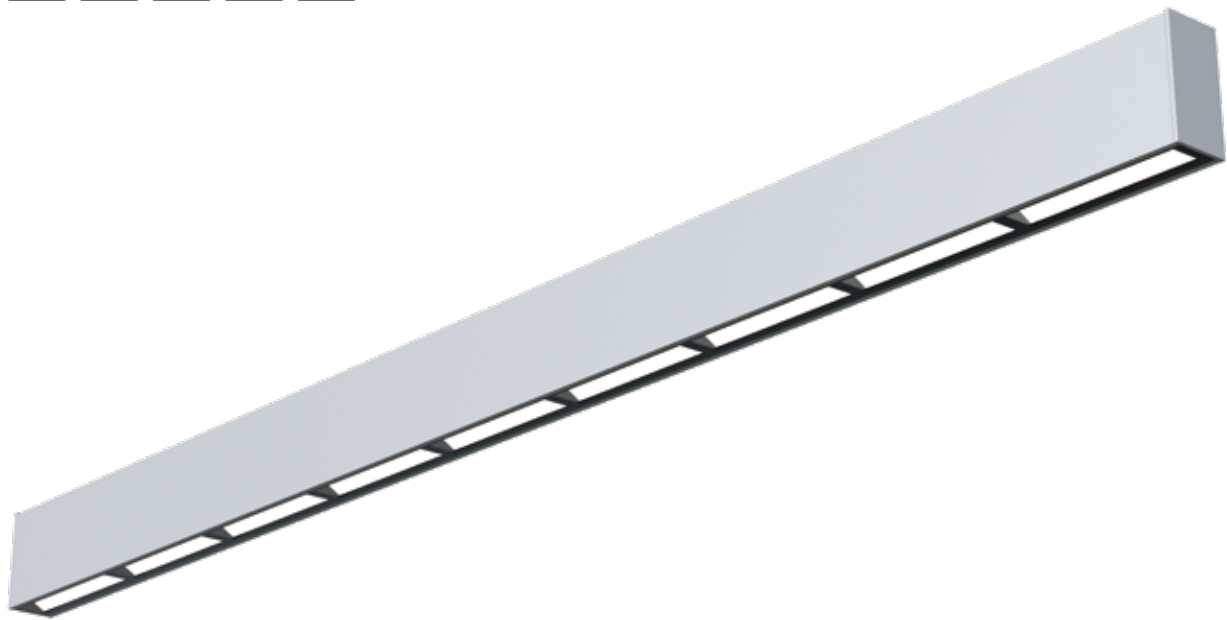

Polarized light design,
extremely low glare

Push in and push
out solution, easy to
install and maintain

Linkable and easy
for maintenance


PRODUCT PARAMETERS

Luminaire Wattage	30W
Luminous Flux	2800 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BWAC-1203030-NN	2800lm	30W	On/off
BWAC-1203030-VN	2800lm	30W	1-10V dimming
BWAC-1203030-DN	2800lm	30W	DALI dimming

SIZE



LIGHT DISTRIBUTION




ROMI-C

APPLICATIONS:
Open-plan office, individual office, cafeteria,
corridors, break-out area, classroom, etc.



- Microprism, UGR<18
- Extremely simple for installation and maintenance
- Come with several size Ø350 / Ø450 / Ø600 / Ø900

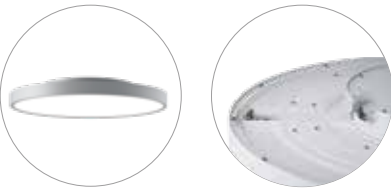


PRODUCT PARAMETERS

Luminaire Wattage	18W	30W	48W	80W
Luminous Flux	1700lm	3300lm	5760lm	9600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<18			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL

Part No.	LM	Power	Function
BROC-3501812-NN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	On/off
BROC-3501812-VN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	1-10V dimming
BROC-3501812-DN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	DALI dimming
BROC-4503021-NN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	On/off
BROC-4503021-VN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	1-10V dimming
BROC-4503021-DN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	DALI dimming
BROC-6004834-NN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	On/off
BROC-6004834-VN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	1-10V dimming
BROC-6004834-DN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	DALI dimming
BROC-9008056-NN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	On/off
BROC-9008056-VN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	1-10V dimming
BROC-9008056-DN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



ELFOO-C

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together




PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFC-1203030-NN	3200lm	30W	On/off
BEFC-1203030-VN	3200lm	30W	1-10V dimming
BEFC-1203030-DN	3200lm	30W	DALI dimming
BEFC-1503535-NN	3600lm	35W	On/off
BEFC-1503535-VN	3600lm	35W	1-10V dimming
BEFC-1503535-DN	3600lm	35W	DALI dimming

SIZE



LIGHT DISTRIBUTION




ELFOO-C3

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



- Push-in and push-out structure, easy for installation and maintenance
- Perfect glare control, low UGR
- Support DALI and 1-10V dimming

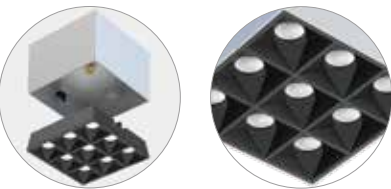


PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<17	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFK-1200808-NN	850lm	8W	On/off
BEFK-1200808-VN	850lm	8W	1-10V dimming
BEFK-1200808-DN	850lm	8W	DALI dimming
BEFK-1201818-NN	1900lm	18W	On/off
BEFK-1201818-VN	1900lm	18W	1-10V dimming
BEFK-1201818-DN	1900lm	18W	DALI dimming

SIZE



LIGHT DISTRIBUTION



LICON-C

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



Simple and delicate design Easy for maintenance Simple, easy and quick installation


PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	3600lm	4500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<22	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLIC-1204040-NN	3600lm	40W	On/off
BLIC-1204040-VN	3600lm	40W	1-10V dimming
BLIC-1204040-DN	3600lm	40W	DALI dimming
BLIC-1505050-NN	4500lm	50W	On/off
BLIC-1505050-VN	4500lm	50W	1-10V dimming
BLIC-1505050-DN	4500lm	50W	DALI dimming

SIZE




LIGHT DISTRIBUTION



LENO-C1

APPLICATIONS:
Open-plan office, individual office,
small meeting room, reception, etc.

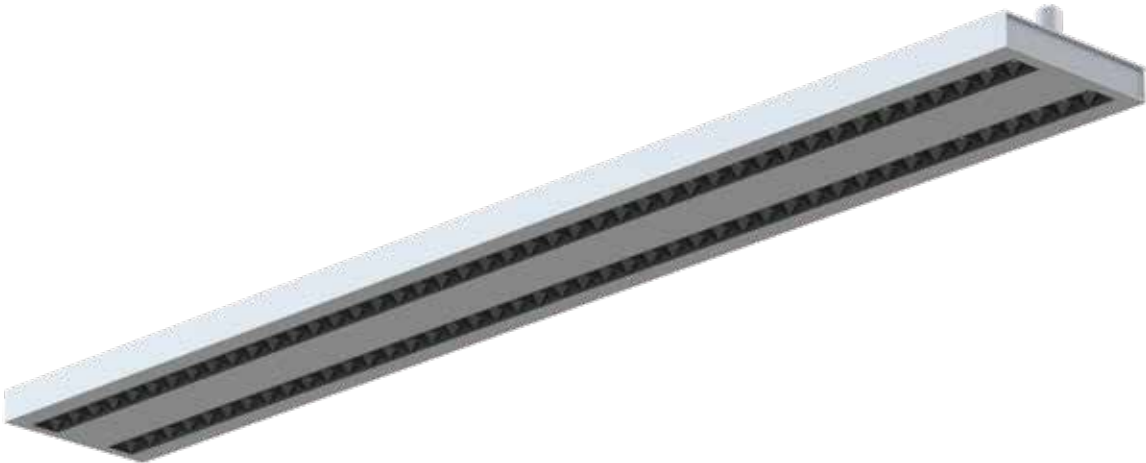

- Microprism, UGR<10
- Simple surface mounted solutions, easy for installation and maintenance
- Support DALI and 1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	40W
Luminous Flux	4500lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	50°
UGR	<10
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BLEC1-1204040-NN	4500lm	40W	On/off
BLEC1-1204040-VN	4500lm	40W	1-10V dimming
BLEC1-1204040-DN	4500lm	40W	DALI dimming

SIZE




LIGHT DISTRIBUTION



LENO-C2

APPLICATIONS:
Open-plan office, individual office,
small meeting room, reception room, etc.

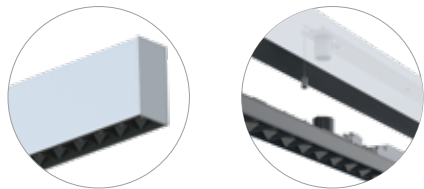

Micro reflector design
UGR<10

Push-in and push-out structure,
easy for installation
and maintenance


PRODUCT PARAMETERS

Luminaire Wattage	30W	40W
Luminous Flux	3000lm	4000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	50°	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEC2-0903030-NN	3000lm	30W	On/off
BLEC2-0903030-VN	3000lm	30W	1-10V dimming
BLEC2-0903030-DN	3000lm	30W	DALI dimming
BLEC2-1204040-NN	4000lm	40W	On/off
BLEC2-1204040-VN	4000lm	40W	1-10V dimming
BLEC2-1204040-DN	4000lm	40W	DALI dimming

SIZE



LIGHT DISTRIBUTION



MAYE-CR0

APPLICATIONS:
Open-plan office, training
room, stairway, corridors, etc.


IP20

<19
UGR

Dimmable





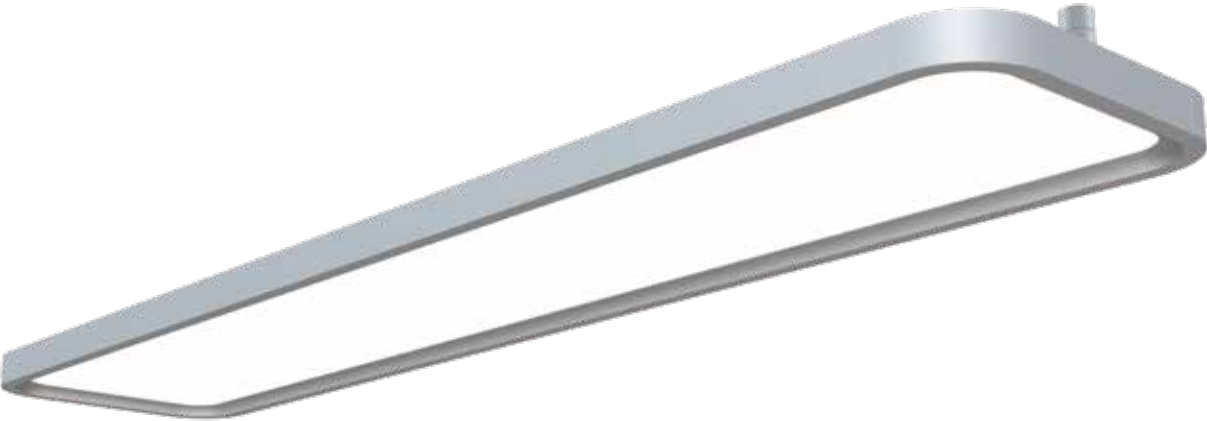

- Microprism, UGR<19
- Direct and Indirect lighting with impressive light uniformity
- Easy for installation and maintenance




PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5400 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMRC-1206050-NN	↑ 1200lm/4200lm ↓	↑ 10W/50W ↓	On/off
BMRC-1206050-VN	↑ 1200lm/4200lm ↓	↑ 10W/50W ↓	1-10V dimming
BMRC-1206050-DN	↑ 1200lm/4200lm ↓	↑ 10W/50W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION



MAYE-CR1

APPLICATIONS:
Open-plan office, training
room, stairway, corridors, etc.

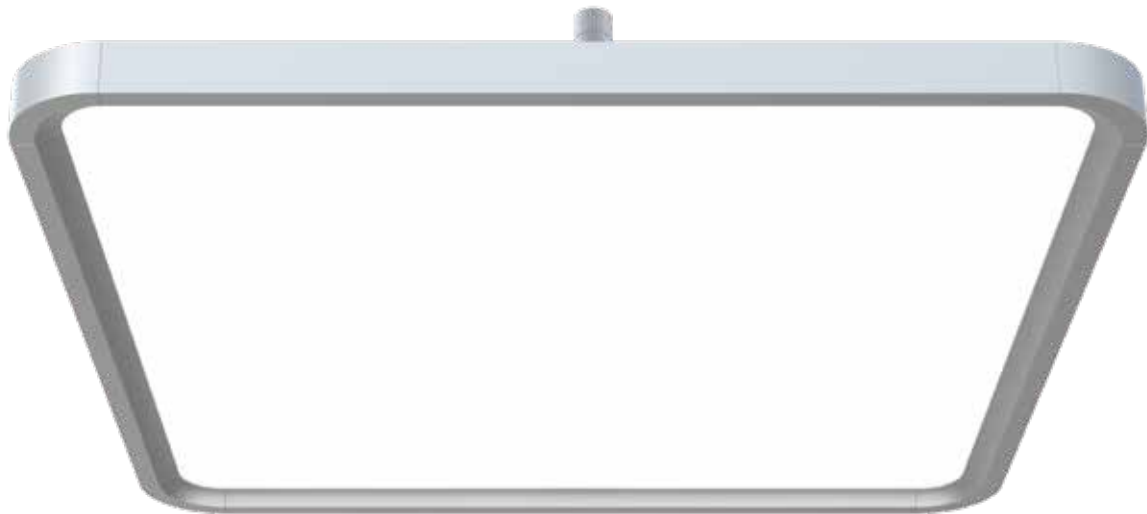

- Microprism, UGR<19
- Direct and Indirect lighting with impressive light uniformity
- Easy for installation and maintenance




PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5700 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMRC-6106050-NN	↑ 1450lm/4250lm ↓	↑ 10W/50W ↓	On/off
BMRC-6106050-VN	↑ 1450lm/4250lm ↓	↑ 10W/50W ↓	1-10V dimming
BMRC-6106050-DN	↑ 1450lm/4250lm ↓	↑ 10W/50W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION




MAYE-CS0

APPLICATIONS:
Open-plan office, training
room, stairway, corridors, etc.

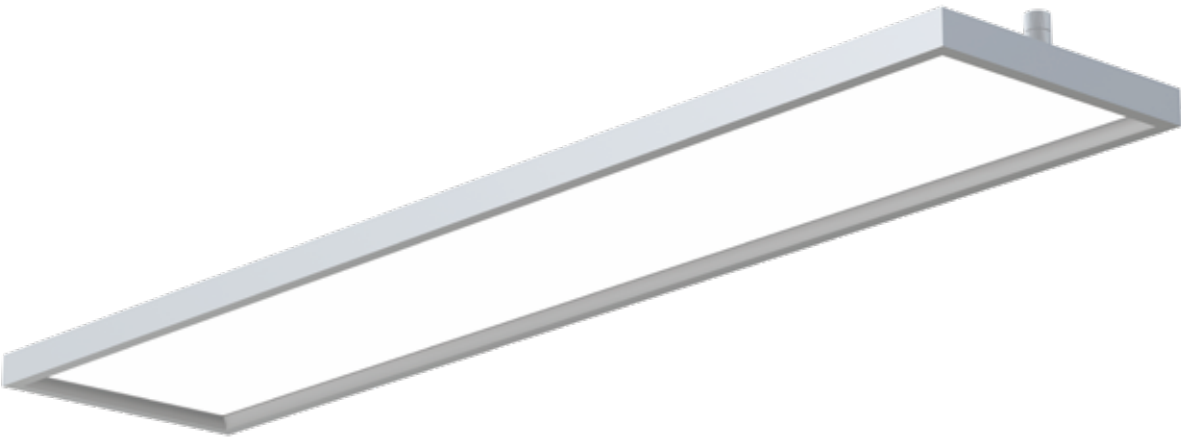

- Microprism, UGR<19
- Direct and Indirect lighting with impressive light uniformity
- Easy for installation and maintenance




PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5700 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMSC-1206050-NN	↑ 1200lm/4500lm ↓	↑ 10W/50W ↓	On/off
BMSC-1206050-VN	↑ 1200lm/4500lm ↓	↑ 10W/50W ↓	1-10V dimming
BMSC-1206050-DN	↑ 1200lm/4500lm ↓	↑ 10W/50W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



MAYE-CS1

APPLICATIONS:
Open-plan office, breakout area,
cafeteria, guest room, etc.



- Microprism, UGR<19
- Direct and Indirect lighting with impressive light uniformity
- Easy for installation and maintenance




PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	5300 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMSC-6106050-NN	↑ 1300lm/4000lm ↓	↑ 10W/50W ↓	On/off
BMSC-6106050-VN	↑ 1300lm/4000lm ↓	↑ 10W/50W ↓	1-10V dimming
BMSC-6106050-DN	↑ 1300lm/4000lm ↓	↑ 10W/50W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION




05

RECESSED LUMINAIRES

APPLICATIONS:

Open-plan office, training room,
conference room and classroom, etc.

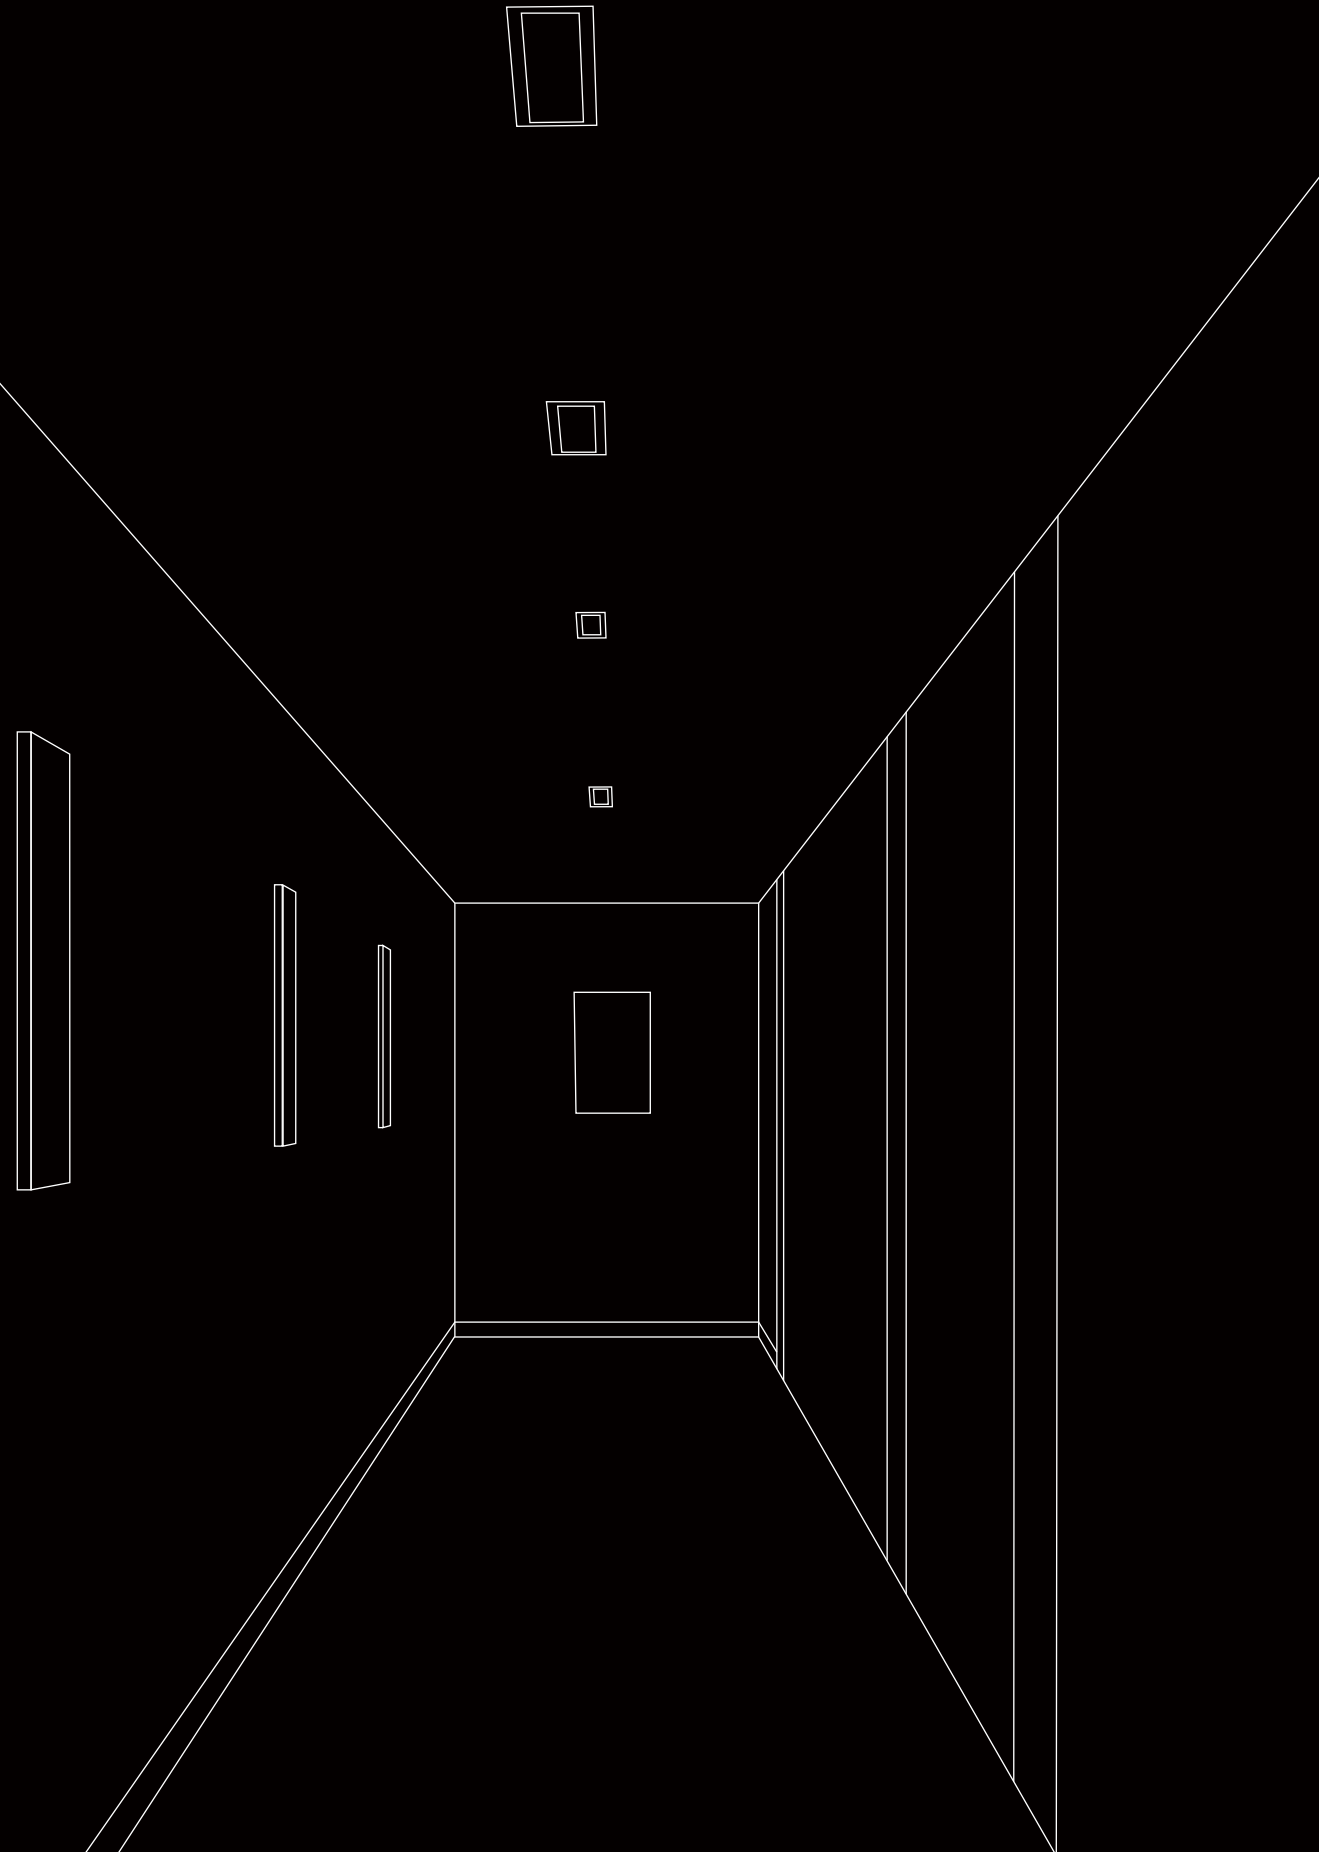

EZY-R

NEW

APPLICATIONS:
Open-plan office, small office, meeting rooms, cafeterias,
foyers and lobbies, corridors, staircases, etc.

IP40

145 LM/W

Dimmable

CE

RoHS



Recessed round luminaire available in 462/612mm diameter sizes

Easy Installation and maintenance with complete fixture setup

Suitable for ceiling thickness range of 3-40mm


PRODUCT PARAMETERS

Luminaire Wattage	15W	28W	30W	40W
Luminous Flux	1950lm	3920lm	4350lm	5890lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<20		<25	
Protection Rating	IP40			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

PRODUCT MODEL

Part No.	LM	Power	Function
BEZR-4501515-NN-01	1950lm	15W	On/off
BEZR-4501515-DN-01	1950lm	15W	DALI dimming
BEZR-6002828-NN-01	3920lm	28W	On/off
BEZR-6002828-DN-01	3920lm	28W	DALI dimming
BEZR-4503030-NN	4350lm	30W	On/off
BEZR-4503030-DN	4350lm	30W	DALI dimming
BEZR-6004040-NN	5890lm	40W	On/off
BEZR-6004040-DN	5890lm	40W	DALI dimming

SIZE

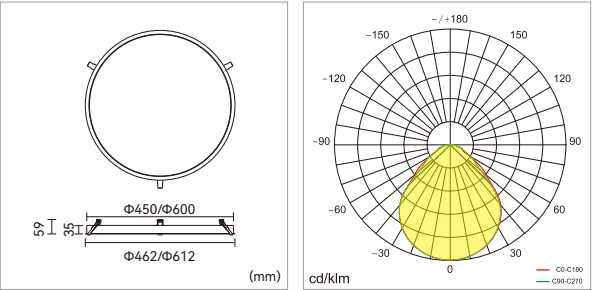

KEY-R NEW

APPLICATIONS:
Open-plan office, small office, meeting room, reception area, etc.



Flexible prismatic plate Support for smart control functions Linkable design solution


PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	4400lm	5500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BKEY-1204040-NN	4400lm	40W	On/off
BKEY-1204040-VN	4400lm	40W	1-10V dimming
BKEY-1204040-DN	4400lm	40W	DALI dimming
BKEY-1505050-NN	5500lm	50W	On/off
BKEY-1505050-VN	5500lm	50W	1-10V dimming
BKEY-1505050-DN	5500lm	50W	DALI dimming

SIZE

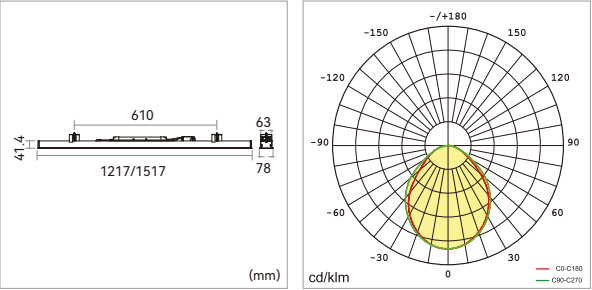


ELFOO-R0

APPLICATIONS:
Open-plan office, training room conference room and classroom, etc.



- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together
- Support for smart control functions

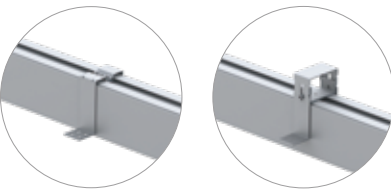


PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFX-1203030-NN	3200lm	30W	On/off
BEFX-1203030-VN	3200lm	30W	1-10V dimming
BEFX-1203030-DN	3200lm	30W	DALI dimming
BEFX-1503535-NN	3600lm	35W	On/off
BEFX-1503535-VN	3600lm	35W	1-10V dimming
BEFX-1503535-DN	3600lm	35W	DALI dimming

SIZE



LIGHT DISTRIBUTION



ELFOO-R1

APPLICATIONS:
Open-plan office, training room, conference room and classroom, etc.

IP20

<18
UGR


Dimmable

75°
Angle

CE

RoHS

- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from the connection parts when linked together
- Support for smart control functions




PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFY-1203030-NN	3200lm	30W	On/off
BEFY-1203030-VN	3200lm	30W	1-10V dimming
BEFY-1203030-DN	3200lm	30W	DALI dimming
BEFY-1503535-NN	3600lm	35W	On/off
BEFY-1503535-VN	3600lm	35W	1-10V dimming
BEFY-1503535-DN	3600lm	35W	DALI dimming

SIZE




LIGHT DISTRIBUTION




ELFOO-D2

APPLICATIONS:
For office corridor, washroom, staircase, etc.



- Push-in-push-out structure, easy for installation and maintenance
- Support DALI and 1-10V dimming
- Perfect glare control, low UGR




PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFS-1200808-NN	850lm	8W	On/off
BEFS-1200808-VN	850lm	8W	1-10V dimming
BEFS-1200808-DN	850lm	8W	DALI dimming
BEFS-1201818-NN	1900lm	18W	On/off
BEFS-1201818-VN	1900lm	18W	1-10V dimming
BEFS-1201818-DN	1900lm	18W	DALI dimming

SIZE



LIGHT DISTRIBUTION



ELFOO-D3

APPLICATIONS:
Open-plan office, training room,
conference room and other office space.

IP20

<19
UGR

Dimmable


Angle

CE

RoHS



- Push-in-push-out structure, easy for installation and maintenance
- Support DALI and 1-10V dimming
- Perfect glare control, low UGR




PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-1400808-NN	850lm	8W	On/off
BEFQ-1400808-VN	850lm	8W	1-10V dimming
BEFQ-1400808-DN	850lm	8W	DALI dimming
BEFQ-1401818-NN	1900lm	18W	On/off
BEFQ-1401818-VN	1900lm	18W	1-10V dimming
BEFQ-1401818-DN	1900lm	18W	DALI dimming

SIZE



LIGHT DISTRIBUTION



ELFOO-D4

APPLICATIONS:
Office corridor, washroom, staircase, etc.

IP20

<18
UGR

Dimmable

Angle







- Perfect glare control, low UGR
- Support DALI and 1-10V dimming
- 5 years warranty


PRODUCT PARAMETERS

Luminaire Wattage	6W
Luminous Flux	778lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	55°
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-1800606-NN	778lm	6W	On/off
BEFQ-1800606-VN	778lm	6W	1-10V dimming
BEFQ-1800606-DN	778lm	6W	DALI dimming

SIZE



LIGHT DISTRIBUTION



ELFOO-D5

APPLICATIONS:
Office corridor, washroom, staircase, etc.

IP20

<18
UGR

Dimmable

95°
Angle

CE

RoHS



- Perfect glare control, low UGR
- Support DALI and 1-10V dimming
- 5 years warranty


PRODUCT PARAMETERS

Luminaire Wattage	12W
Luminous Flux	1552lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	55°
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-3401212-NN	1552lm	12W	On/off
BEFQ-3401212-VN	1552lm	12W	1-10V dimming
BEFQ-3401212-DN	1552lm	12W	DALI dimming

SIZE



LIGHT DISTRIBUTION



WASE-R

APPLICATIONS:
Open-plan office, training room, stairs, corridors, etc.

IP20


<19
UGR

Dimmable

CE

RoHS

- Push-in-push-out solution offers, offering an impressive simple and nice installation experience
- Linkable and easy for maintenance
- Wash 3 meter's wall with impressive uniformity light
- Offering great compensation light for office space
- Polarized light design, extremely low glare

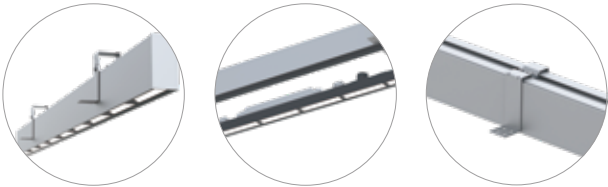


PRODUCT PARAMETERS

Luminaire Wattage	30W
Luminous Flux	2800lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BWAX-1203030-NN	2800lm	30W	On/off
BWAX-1203030-VN	2800lm	30W	1-10V dimming
BWAX-1203030-DN	2800lm	30W	DALI dimming

SIZE



LIGHT DISTRIBUTION



LENO-R0

APPLICATIONS:
Open-plan office, small office, meeting room, reception area.

IP20


<10
UGR

Dimmable

50°
Angle





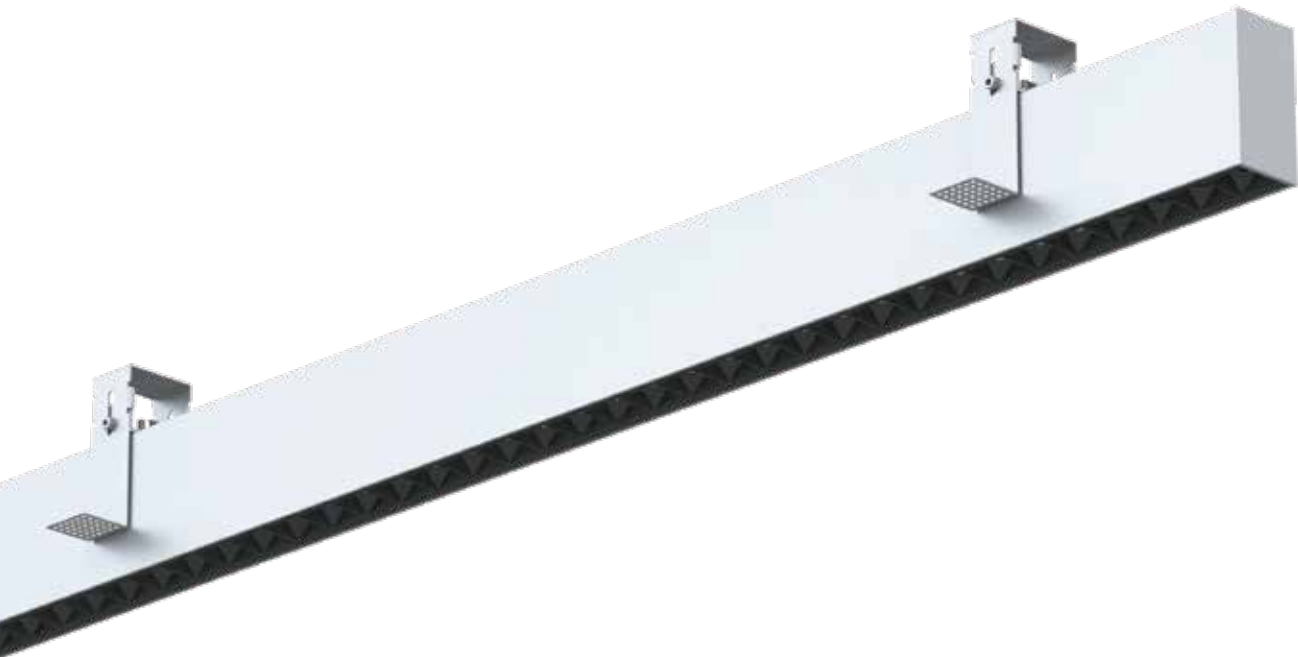

- Push-in-push-out structure, easy for installation and maintenance
- Linkable trimless recessed mounted profiles system without connection gap
- Support tunable white


PRODUCT PARAMETER

Luminaire Wattage	30W	40W
Luminous Flux	3000lm	4000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	50°	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEX-0903030-NN	3000lm	30W	On/off
BLEX-0903030-VN	3000lm	30W	1-10V dimming
BLEX-0903030-DN	3000lm	30W	DALI dimming
BLEX-1204040-NN	4000lm	40W	On/off
BLEX-1204040-VN	4000lm	40W	1-10V dimming
BLEX-1204040-DN	4000lm	40W	DALI dimming

SIZE



LIGHT DISTRIBUTION



LENO-R1

APPLICATIONS:
Open-plan office, small office, meeting room, reception area.

IP20

<10
UGR

Dimmable

50°
Angle

CE

RoHS



- Push-in-push-out structure, easy for installation and maintenance
- Linkable trimless recessed mounted profiles system without connection gap
- Support tunable white


PRODUCT PARAMETER

Luminaire Wattage	30W	40W
Luminous Flux	3000lm	4000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	50°	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEY-0903030-NN	3000lm	30W	On/off
BLEY-0903030-VN	3000lm	30W	1-10V dimming
BLEY-0903030-DN	3000lm	30W	DALI dimming
BLEY-1204040-NN	4000lm	40W	On/off
BLEY-1204040-VN	4000lm	40W	1-10V dimming
BLEY-1204040-DN	4000lm	40W	DALI dimming

SIZE



LIGHT DISTRIBUTION



06

WALL MOUNTED LUMINAIRES

APPLICATIONS:

Open-plan office, stairs, corridors and other office space.



NEWA

APPLICATIONS:
Open-plan office, stairs, corridors and
other office space.



- Linkable wall lamp to avoid wiring problems, one input can support 30 meters
- Both direct and indirect light can wash the wall with 650mm height, uniformity light, low glare
- Impressive easy for installation and maintenance
- High lumen efficiency, up to 120LM/W




PRODUCT PARAMETER

Luminaire Wattage	30W	50W
Luminous Flux	3600lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BNEW-1203015-NN	↑ 1800lm/1800lm ↓	↑ 15W/15W ↓	On/off
BNEW-1203015-VN	↑ 1800lm/1800lm ↓	↑ 15W/15W ↓	1-10V dimming
BNEW-1203015-DN	↑ 1800lm/1800lm ↓	↑ 15W/15W ↓	DALI dimming
BNEW-1805025-NN	↑ 3000lm/3000lm ↓	↑ 25W/25W ↓	On/off
BNEW-1805025-VN	↑ 3000lm/3000lm ↓	↑ 25W/25W ↓	1-10V dimming
BNEW-1805025-DN	↑ 3000lm/3000lm ↓	↑ 25W/25W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION




LICON-W

APPLICATIONS:
Open-plan office, stairs, corridors and other office spaces.



- Linkable wall lamp to avoid wiring problems, one inputcan support 30 meters
- Impressive easy for installation and maintenance

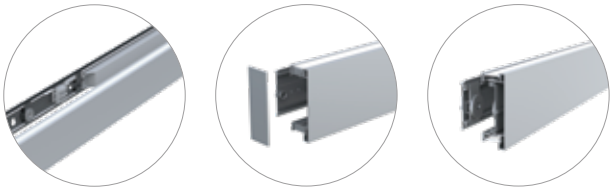


PRODUCT PARAMETER

Luminaire Wattage	40W	50W	60W
Luminous Flux	3600lm	4500lm	5400lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / 1-10V dimming / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	Function
BLIW-1204020-NN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	On/off
BLIW-1204020-VN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	1-10V dimming
BLIW-1204020-DN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	DALI dimming
BLIW-1505025-NN	↑ 2250lm/2250lm ↓	↑ 25W/25W ↓	On/off
BLIW-1505025-VN	↑ 2250lm/2250lm ↓	↑ 25W/25W ↓	1-10V dimming
BLIW-1505025-DN	↑ 2250lm/2250lm ↓	↑ 25W/25W ↓	DALI dimming
BLIW-1806030-NN	↑ 2700lm/2700lm ↓	↑ 30W/30W ↓	On/off
BLIW-1806030-VN	↑ 2700lm/2700lm ↓	↑ 30W/30W ↓	1-10V dimming
BLIW-1806030-DN	↑ 2700lm/2700lm ↓	↑ 30W/30W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



MAYE-WR

APPLICATIONS:
Open-plan office, stairs, corridors, lobby,
break out area etc.

IP20

<18
UGR

Dimmable

CE

RoHS



- Direct and indirect lighting with impressive light uniformity
- Widely used in public working area with UGR<18
- Easy for installation and maintenance
- High lumen output with 90LM/W


PRODUCT PARAMETER

Luminaire Wattage	40W
Luminous Flux	3600 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMRW-6104020-NN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	On/off
BMRW-6104020-VN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	1-10V dimming
BMRW-6104020-DN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



MAYE-WS

APPLICATIONS:
Open-plan office, stairs, corridors,
lobby, break out area etc.


IP20

<18
UGR

Dimmable

CE

RoHS

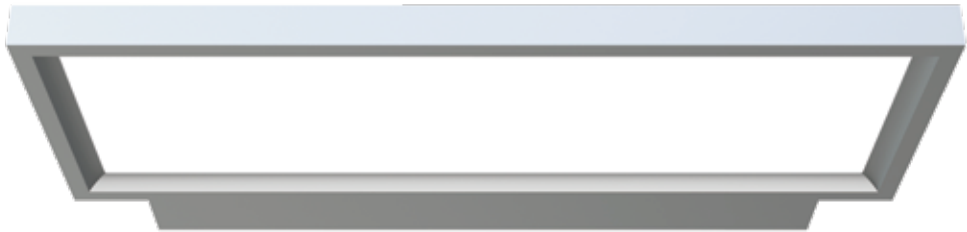

- Direct and indirect lighting with impressive light uniformity
- Widely used in public working area with UGR<18
- Easy for installation and maintenance
- High lumen output with 90LM/W


PRODUCT PARAMETER

Luminaire Wattage	40W
Luminous Flux	3600 lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMSW-6104020-NN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	On/off
BMSW-6104020-VN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	1-10V dimming
BMSW-6104020-DN	↑ 1800lm/1800lm ↓	↑ 20W/20W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION





ARCHITECTURE GARDEN LIGHTING

02.

BOLLARDS	188
FLOODLIGHTS	207
WALL LUMINAIRES	213
CEILING LUMINAIRES	225
WALL RECESSED LUMINAIRES	229
TABLE LAMPS	235



01

BOLLARDS

Bole is a range of high-quality IP65 bollard light with a contemporary and classic design. The fixture is with die-casting head, extrusion aluminum body and pc optical concept, sophisticated surface finish gives a high-end appearance of texture. Thanks to perfect powder coating , our bollards have TUV C5 certificates for tough weather conditions , resistance seawater resistance.

Bole range is available in Round/ Square/ Mushroom designs, and each design has 250mm, 600mm, 1000mm BOLE reaches 10 meters. 1000mm BOLE The professional optical solution offers a fully anti-glare and comfortable light uniformity, reaches 10 meters diameter wide light distribution but with a very narrow dark zone under the fixture. Support for smart control such as DALI2, bluetooth, CAMSAMBI, SWARM, HCL, etc.

main applications in architectural buildings including commercial buildings, corporate headquarters, parks, recreational areas and gardens.



BUTTON-L



APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- Large angle light distribution
- No glare, long range, uniform light
- Small size




BUTTON-L

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1TL1-20280-NN	2000lm	20W	2700K	On/off
B1TL1-20380-NN	2000lm	20W	3000K	On/off
B1TL1-20580-NN	2000lm	20W	4000K	On/off
B1TL1-20280-DN	2000lm	20W	2700K	DALI
B1TL1-20380-DN	2000lm	20W	3000K	DALI
B1TL1-20580-DN	2000lm	20W	4000K	DALI

SIZE




BUTTON-L

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1TL0-10280-NN	1000lm	10W	2700K	On/off
B1TL0-10380-NN	1000lm	10W	3000K	On/off
B1TL0-10580-NN	1000lm	10W	4000K	On/off
B1TL0-10280-DN	1000lm	10W	2700K	DALI
B1TL0-10380-DN	1000lm	10W	3000K	DALI
B1TL0-10580-DN	1000lm	10W	4000K	DALI

SIZE



SHOW-L



APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- Polarized optics, wide range of light distribution , no upward light
- Small size
- Motion sensor version optional




SHOW-L

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SL1-10280-NN	900lm	10W	2700K	On/off	No
B1SL1-10380-NN	900lm	10W	3000K	On/off	No
B1SL1-10580-NN	900lm	10W	4000K	On/off	No
B1SL1-10280-DN	900lm	10W	2700K	DALI	No
B1SL1-10380-DN	900lm	10W	3000K	DALI	No
B1SL1-10580-DN	900lm	10W	4000K	DALI	No
B1SL1-10280-DM	900lm	10W	2700K	DALI	Motion sensor
B1SL1-10380-DM	900lm	10W	3000K	DALI	Motion sensor
B1SL1-10580-DM	900lm	10W	4000K	DALI	Motion sensor

SIZE




SHOW-L

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SL0-05280-NN	450lm	5W	2700K	On/off	No
B1SL0-05380-NN	450lm	5W	3000K	On/off	No
B1SL0-05580-NN	450lm	5W	4000K	On/off	No
B1SL0-05280-DN	450lm	5W	2700K	DALI	No
B1SL0-05380-DN	450lm	5W	3000K	DALI	No
B1SL0-05580-DN	450lm	5W	4000K	DALI	No
B1SL0-05280-DM	450lm	5W	2700K	DALI	Motion sensor
B1SL0-05380-DM	450lm	5W	3000K	DALI	Motion sensor
B1SL0-05580-DM	450lm	5W	4000K	DALI	Motion sensor

SIZE



BOLE-M



APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- No glare/Light emission 360°
- No glare, long range, uniform light




BOLE-M1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BM1-12280-NN	736lm	12W	2700K	On/off
B1BM1-12380-NN	736lm	12W	3000K	On/off
B1BM1-12580-NN	736lm	12W	4000K	On/off
B1BM1-12280-DN	736lm	12W	2700K	DALI
B1BM1-12380-DN	736lm	12W	3000K	DALI
B1BM1-12580-DN	736lm	12W	4000K	DALI

SIZE



LIGHT DISTRIBUTION




BOLE-M0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BM0-06280-NN	385lm	6.5W	2700K	On/off
B1BM0-06380-NN	385lm	6.5W	3000K	On/off
B1BM0-06580-NN	385lm	6.5W	4000K	On/off
B1BM0-06280-DN	385lm	6.5W	2700K	DALI
B1BM0-06380-DN	385lm	6.5W	3000K	DALI
B1BM0-06580-DN	385lm	6.5W	4000K	DALI

SIZE



LIGHT DISTRIBUTION



BOLE-R

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



No glare/
Light emission 360° or
optionally 180°

Long range

Uniform light



BOLE-R2


PRODUCT MODEL
Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR2-24280-NN	1124lm	24W	2700K	On/off
B1BR2-24280-DN	1124lm	24W	2700K	Dail 2
B1BR2-24280-WM	1124lm	24W	2700K	Wireless
B1BR2-24380-NN	1124lm	24W	3000K	On/off
B1BR2-24380-DN	1124lm	24W	3000K	Dail 2
B1BR2-24380-WM	1124lm	24W	3000K	Wireless
B1BR2-24580-NN	1124lm	24W	4000K	On/off
B1BR2-24580-DN	1124lm	24W	4000K	Dail 2
B1BR2-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR5-24280-NN	450lm	24W	2700K	On/off
B1BR5-24280-DN	450lm	24W	2700K	Dail 2
B1BR5-24280-WM	450lm	24W	2700K	Wireless
B1BR5-24380-NN	450lm	24W	3000K	On/off
B1BR5-24380-DN	450lm	24W	3000K	Dail 2
B1BR5-24380-WM	450lm	24W	3000K	Wireless
B1BR5-24580-NN	450lm	24W	4000K	On/off
B1BR5-24580-DN	450lm	24W	4000K	Dail 2
B1BR5-24580-WM	450lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

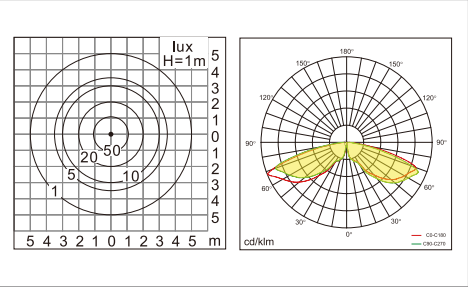

BOLE-R1

PRODUCT MODEL
Optics with 360 ° emission


Part No.	LM	Power	CCT	Dimming
B1BR1-24280-NN	1124lm	24W	2700K	On/off
B1BR1-24280-DN	1124lm	24W	2700K	Dail 2
B1BR1-24280-WM	1124lm	24W	2700K	Wireless
B1BR1-24380-NN	1124lm	24W	3000K	On/off
B1BR1-24380-DN	1124lm	24W	3000K	Dail 2
B1BR1-24380-WM	1124lm	24W	3000K	Wireless
B1BR1-24580-NN	1124lm	24W	4000K	On/off
B1BR1-24580-DN	1124lm	24W	4000K	Dail 2
B1BR1-24580-WM	1124lm	24W	4000K	Wireless

Optics with 180 ° emission


Part No.	LM	Power	CCT	Dimming
B1BR4-24280-NN	450lm	24W	2700K	On/off
B1BR4-24280-DN	450lm	24W	2700K	Dail 2
B1BR4-24280-WM	450lm	24W	2700K	Wireless
B1BR4-24380-NN	450lm	24W	3000K	On/off
B1BR4-24380-DN	450lm	24W	3000K	Dail 2
B1BR4-24380-WM	450lm	24W	3000K	Wireless
B1BR4-24580-NN	450lm	24W	4000K	On/off
B1BR4-24580-DN	450lm	24W	4000K	Dail 2
B1BR4-24580-WM	450lm	24W	4000K	Wireless



SIZE



LIGHT DISTRIBUTION

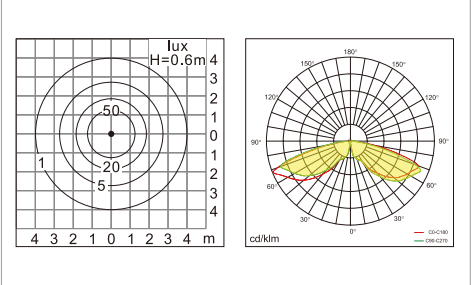

BOLE-R0

PRODUCT MODEL


Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR0-12280-NN	498lm	12W	2700K	On/off
B1BR0-12280-DN	498lm	12W	2700K	Dail 2
B1BR0-12280-WM	498lm	12W	2700K	Wireless
B1BR0-12380-NN	498lm	12W	3000K	On/off
B1BR0-12380-DN	498lm	12W	3000K	Dail 2
B1BR0-12380-WM	498lm	12W	3000K	Wireless
B1BR0-12580-NN	498lm	12W	4000K	On/off
B1BR0-12580-DN	498lm	12W	4000K	Dail 2
B1BR0-12580-WM	498lm	12W	4000K	Wireless
B1BR0-24280-NN	1124lm	24W	2700K	On/off
B1BR0-24280-DN	1124lm	24W	2700K	Dail 2
B1BR0-24280-WM	1124lm	24W	2700K	Wireless
B1BR0-24380-NN	1124lm	24W	3000K	On/off
B1BR0-24380-DN	1124lm	24W	3000K	Dail 2
B1BR0-24380-WM	1124lm	24W	3000K	Wireless
B1BR0-24580-NN	1124lm	24W	4000K	On/off
B1BR0-24580-DN	1124lm	24W	4000K	Dail 2
B1BR0-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR3-12280-NN	470lm	12W	2700K	On/off
B1BR3-12280-DN	470lm	12W	2700K	Dail 2
B1BR3-12280-WM	470lm	12W	2700K	Wireless
B1BR3-12380-NN	470lm	12W	3000K	On/off
B1BR3-12380-DN	470lm	12W	3000K	Dail 2
B1BR3-12380-WM	470lm	12W	3000K	Wireless
B1BR3-12580-NN	470lm	12W	4000K	On/off
B1BR3-12580-DN	470lm	12W	4000K	Dail 2
B1BR3-12580-WM	470lm	12W	4000K	Wireless
B1BR3-24280-NN	450lm	24W	2700K	On/off
B1BR3-24280-DN	450lm	24W	2700K	Dail 2
B1BR3-24280-WM	450lm	24W	2700K	Wireless
B1BR3-24380-NN	450lm	24W	3000K	On/off
B1BR3-24380-DN	450lm	24W	3000K	Dail 2
B1BR3-24380-WM	450lm	24W	3000K	Wireless
B1BR3-24580-NN	450lm	24W	4000K	On/off
B1BR3-24580-DN	450lm	24W	4000K	Dail 2
B1BR3-24580-WM	450lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

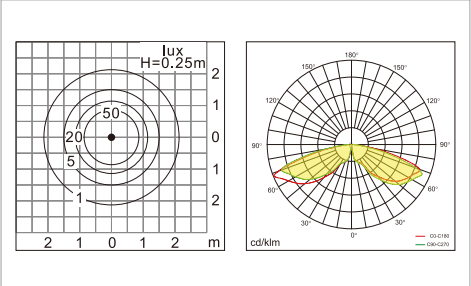

BOLE-S

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- No glare/Light emission 360°
- No glare, long range, uniform light



BOLE-S2

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS2-24280-NN	1162lm	24W	2700K	On/off
B1BS2-24280-DN	1162lm	24W	2700K	Dail 2
B1BS2-24280-WM	1162lm	24W	2700K	Wireless
B1BS2-24380-NN	1162lm	24W	3000K	On/off
B1BS2-24380-DN	1162lm	24W	3000K	Dail 2
B1BS2-24380-WM	1162lm	24W	3000K	Wireless
B1BS2-24580-NN	1162lm	24W	4000K	On/off
B1BS2-24580-DN	1162lm	24W	4000K	Dail 2
B1BS2-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS5-24280-NN	620lm	24W	2700K	On/off
B1BS5-24280-DN	620lm	24W	2700K	Dail 2
B1BS5-24280-WM	620lm	24W	2700K	Wireless
B1BS5-24380-NN	620lm	24W	3000K	On/off
B1BS5-24380-DN	620lm	24W	3000K	Dail 2
B1BS5-24380-WM	620lm	24W	3000K	Wireless
B1BS5-24580-NN	620lm	24W	4000K	On/off
B1BS5-24580-DN	620lm	24W	4000K	Dail 2
B1BS5-24580-WM	620lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS8-24280-NN	460lm	24W	2700K	On/off
B1BS8-24280-DN	460lm	24W	2700K	Dail 2
B1BS8-24280-WM	460lm	24W	2700K	Wireless
B1BS8-24380-NN	460lm	24W	3000K	On/off
B1BS8-24380-DN	460lm	24W	3000K	Dail 2
B1BS8-24380-WM	460lm	24W	3000K	Wireless
B1BS8-24580-NN	460lm	24W	4000K	On/off
B1BS8-24580-DN	460lm	24W	4000K	Dail 2
B1BS8-24580-WM	460lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

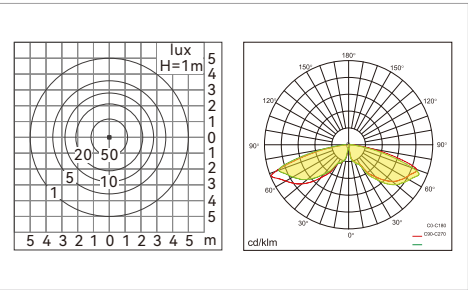

BOLE-S1

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS1-24280-NN	1162lm	24W	2700K	On/off
B1BS1-24280-DN	1162lm	24W	2700K	Dail 2
B1BS1-24280-WM	1162lm	24W	2700K	Wireless
B1BS1-24380-NN	1162lm	24W	3000K	On/off
B1BS1-24380-DN	1162lm	24W	3000K	Dail 2
B1BS1-24380-WM	1162lm	24W	3000K	Wireless
B1BS1-24580-NN	1162lm	24W	4000K	On/off
B1BS1-24580-DN	1162lm	24W	4000K	Dail 2
B1BS1-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS4-24280-NN	620lm	24W	2700K	On/off
B1BS4-24280-DN	620lm	24W	2700K	Dail 2
B1BS4-24280-WM	620lm	24W	2700K	Wireless
B1BS4-24380-NN	620lm	24W	3000K	On/off
B1BS4-24380-DN	620lm	24W	3000K	Dail 2
B1BS4-24380-WM	620lm	24W	3000K	Wireless
B1BS4-24580-NN	620lm	24W	4000K	On/off
B1BS4-24580-DN	620lm	24W	4000K	Dail 2
B1BS4-24580-WM	620lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS7-24280-NN	460lm	24W	2700K	On/off
B1BS7-24280-DN	460lm	24W	2700K	Dail 2
B1BS7-24280-WM	460lm	24W	2700K	Wireless
B1BS7-24380-NN	460lm	24W	3000K	On/off
B1BS7-24380-DN	460lm	24W	3000K	Dail 2
B1BS7-24380-WM	460lm	24W	3000K	Wireless
B1BS7-24580-NN	460lm	24W	4000K	On/off
B1BS7-24580-DN	460lm	24W	4000K	Dail 2
B1BS7-24580-WM	460lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

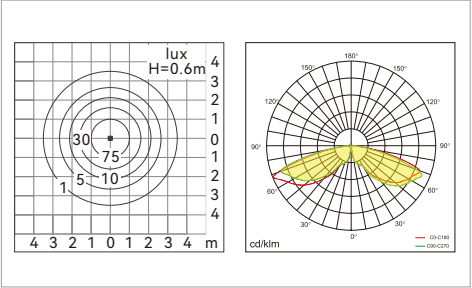

BOLE-S0

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS0-12280-NN	505lm	12W	2700K	On/off
B1BS0-12280-DN	505lm	12W	2700K	Dail 2
B1BS0-12280-WM	505lm	12W	2700K	Wireless
B1BS0-12380-NN	505lm	12W	3000K	On/off
B1BS0-12380-DN	505lm	12W	3000K	Dail 2
B1BS0-12380-WM	505lm	12W	3000K	Wireless
B1BS0-12580-NN	505lm	12W	4000K	On/off
B1BS0-12580-DN	505lm	12W	4000K	Dail 2
B1BS0-12580-WM	505lm	12W	4000K	Wireless
B1BS0-24280-NN	1162lm	24W	2700K	On/off
B1BS0-24280-DN	1162lm	24W	2700K	Dail 2
B1BS0-24280-WM	1162lm	24W	2700K	Wireless
B1BS0-24380-NN	1162lm	24W	3000K	On/off
B1BS0-24380-DN	1162lm	24W	3000K	Dail 2
B1BS0-24380-WM	1162lm	24W	3000K	Wireless
B1BS0-24580-NN	1162lm	24W	4000K	On/off
B1BS0-24580-DN	1162lm	24W	4000K	Dail 2
B1BS0-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS3-12280-NN	505lm	12W	2700K	On/off
B1BS3-12280-DN	505lm	12W	2700K	Dail 2
B1BS3-12280-WM	505lm	12W	2700K	Wireless
B1BS3-12380-NN	505lm	12W	3000K	On/off
B1BS3-12380-DN	505lm	12W	3000K	Dail 2
B1BS3-12380-WM	505lm	12W	3000K	Wireless
B1BS3-12580-NN	505lm	12W	4000K	On/off
B1BS3-12580-DN	505lm	12W	4000K	Dail 2
B1BS3-12580-WM	505lm	12W	4000K	Wireless
B1BS3-24280-NN	1162lm	24W	2700K	On/off
B1BS3-24280-DN	1162lm	24W	2700K	Dail 2
B1BS3-24280-WM	1162lm	24W	2700K	Wireless
B1BS3-24380-NN	1162lm	24W	3000K	On/off
B1BS3-24380-DN	1162lm	24W	3000K	Dail 2
B1BS3-24380-WM	1162lm	24W	3000K	Wireless
B1BS3-24580-NN	1162lm	24W	4000K	On/off
B1BS3-24580-DN	1162lm	24W	4000K	Dail 2
B1BS3-24580-WM	1162lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS6-12280-NN	450lm	12W	2700K	On/off
B1BS6-12280-DN	450lm	12W	2700K	Dail 2
B1BS6-12280-WM	450lm	12W	2700K	Wireless
B1BS6-12380-NN	450lm	12W	3000K	On/off
B1BS6-12380-DN	450lm	12W	3000K	Dail 2
B1BS6-12380-WM	450lm	12W	3000K	Wireless
B1BS6-12580-NN	450lm	12W	4000K	On/off
B1BS6-12580-DN	450lm	12W	4000K	Dail 2
B1BS6-12580-WM	450lm	12W	4000K	Wireless
B1BS6-24280-NN	470lm	24W	2700K	On/off
B1BS6-24280-DN	470lm	24W	2700K	Dail 2
B1BS6-24280-WM	470lm	24W	2700K	Wireless
B1BS6-24380-NN	470lm	24W	3000K	On/off
B1BS6-24380-DN	470lm	24W	3000K	Dail 2
B1BS6-24380-WM	470lm	24W	3000K	Wireless
B1BS6-24580-NN	470lm	24W	4000K	On/off
B1BS6-24580-DN	470lm	24W	4000K	Dail 2
B1BS6-24580-WM	470lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

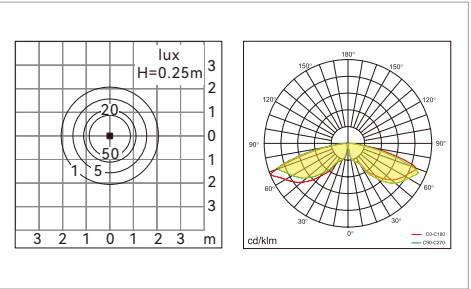


BOLE-U

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens. etc.



- No glare/Light emission 360°
- No glare, long range, uniform light

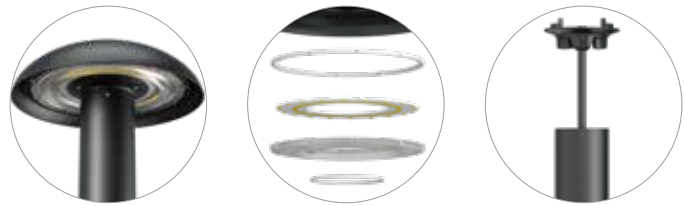


BOLE-U2


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU2-24280-NN	2087lm	24W	2700K	On/off
B1BU2-24380-NN	2087lm	24W	3000K	On/off
B1BU2-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

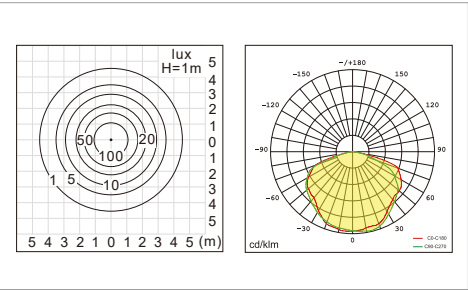


BOLE-U1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU1-24280-NN	2087lm	24W	2700K	On/off
B1BU1-24380-NN	2087lm	24W	3000K	On/off
B1BU1-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

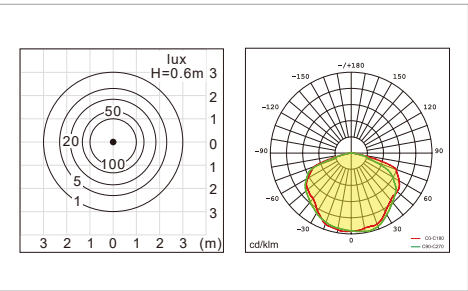


BOLE-U0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU0-10380-NN	907lm	10W	2700K	On/off
B1BU0-10380-NN	907lm	10W	3000K	On/off
B1BU0-10580-NN	907lm	10W	4000K	On/off
B1BU0-24380-NN	2087lm	24W	2700K	On/off
B1BU0-24380-NN	2087lm	24W	3000K	On/off
B1BU0-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

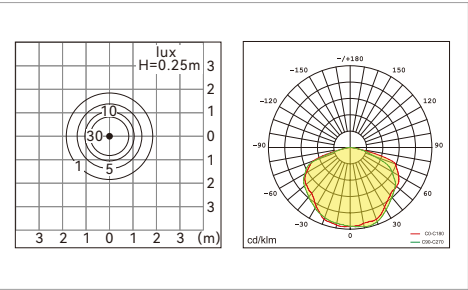

02


FLOODLIGHTS

Cica is a series of high-quality floodlights, bionic design, rich textured design composed of die-casting aluminum parts, reflector, tempered glass, high-quality outdoor powder coating spraying process, Cica has tough weather resistance and protection grade is IP65.

Cica series uses one piece die-casting molding process, good heat dissipation performance. The luminaire has four sizes, providing three kinds of light angles to meet the lighting needs of different scenes. Deep anti-glare reflector design, clean light spot, with good anti-glare effect. Support a variety of optical accessories and Dali2 dimming.

Cica series are easy to install, angle adjustable from two directions which can precisely meet the lighting needs of lighting trees, architecture and sculpture.

Provide 5 years warranty.

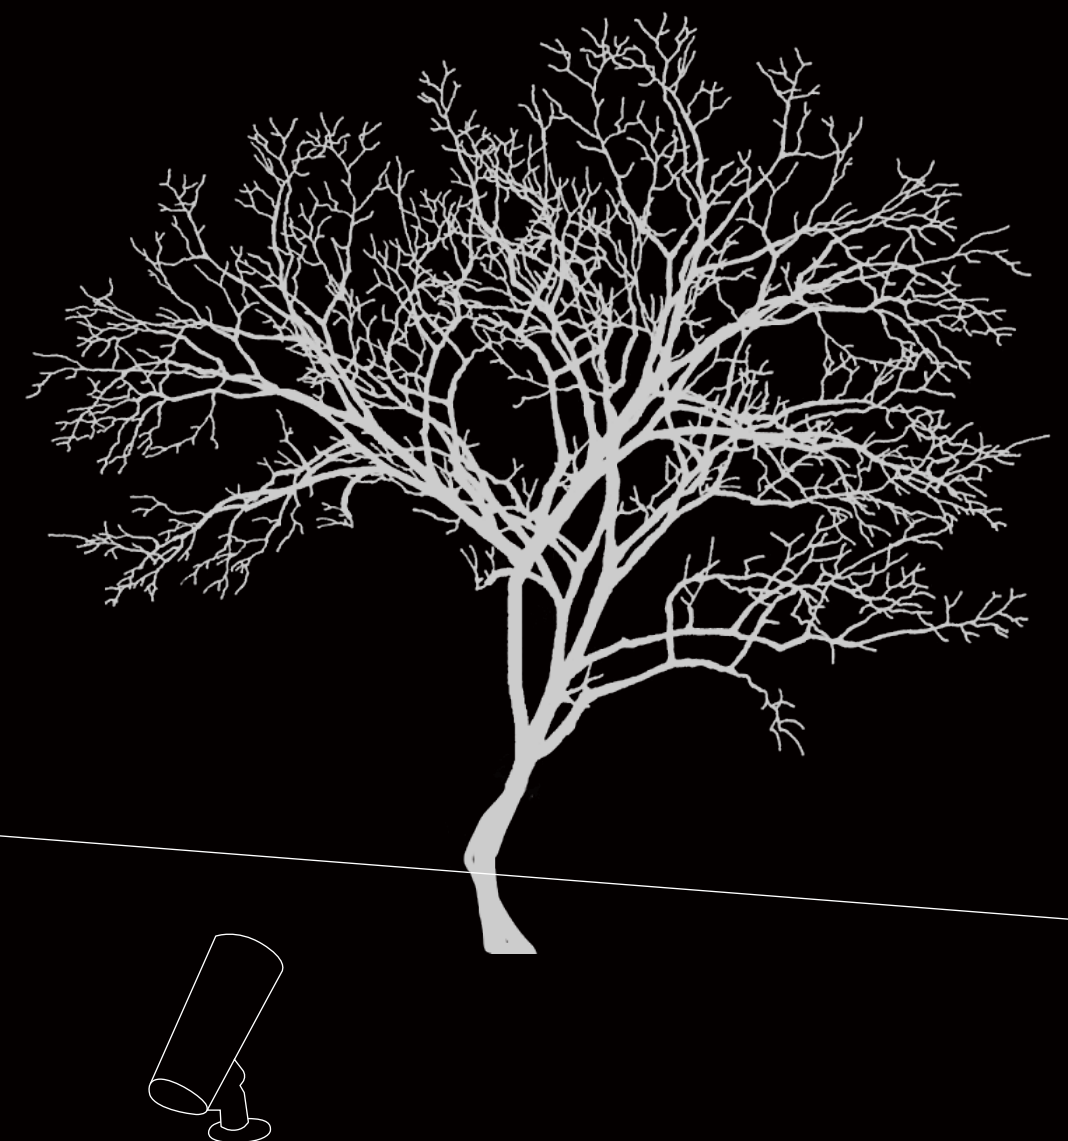


CICA

APPLICATIONS:
Trees, buildings and sculptures, etc.



- Bionic design
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming




CICA-X


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CX0-40502-NN	2670lm	40W	2700K3000K/4000K	15°	On/off
B3CX0-40502-DN	2670lm	40W	2700K3000K/4000K	15°	DALI 2
B3CX0-40503-NN	2543lm	40W	2700K3000K/4000K	24°	On/off
B3CX0-40503-DN	2543lm	40W	2700K3000K/4000K	24°	DALI 2
B3CX0-40504-NN	2370lm	40W	2700K3000K/4000K	38°	On/off
B3CX0-40504-DN	2370lm	40W	2700K3000K/4000K	38°	DALI 2

LIGHT DISTRIBUTION

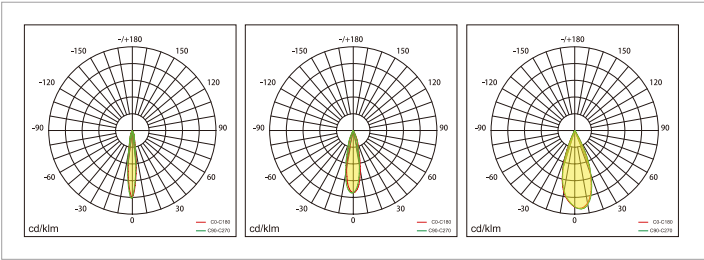

SIZE




CICA-M


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CM0-27502-NN	1730lm	27W	2700K3000K/4000K	15°	On/off
B3CM0-27502-DN	1730lm	27W	2700K3000K/4000K	15°	DALI 2
B3CM0-27503-NN	2050lm	27W	2700K3000K/4000K	24°	On/off
B3CM0-27503-DN	2050lm	27W	2700K3000K/4000K	24°	DALI 2
B3CM0-27504-NN	1810lm	27W	2700K3000K/4000K	38°	On/off
B3CM0-27504-DN	1810lm	27W	2700K3000K/4000K	38°	DALI 2

LIGHT DISTRIBUTION

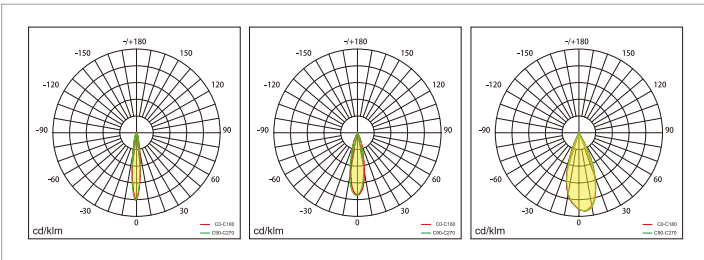

SIZE




CICA

APPLICATIONS:
Trees, buildings and sculptures, etc.



- Cica series use one piece die-casting molding process, good heat dissipation performance.
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming

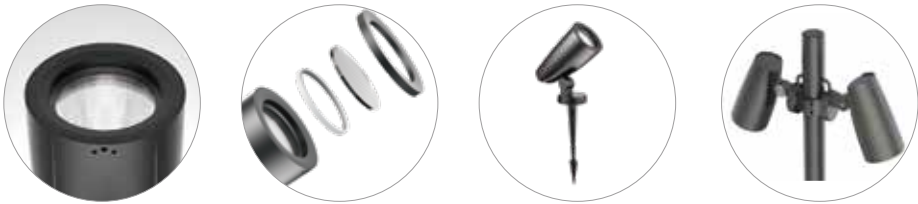


CICA-S



PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CS0-10502-NN	685lm	10W	2700K3000K/4000K	15°	On/off
B3CS0-10503-NN	595lm	10W	2700K3000K/4000K	24°	On/off
B3CS0-10504-NN	706lm	10W	2700K3000K/4000K	38°	On/off

LIGHT DISTRIBUTION

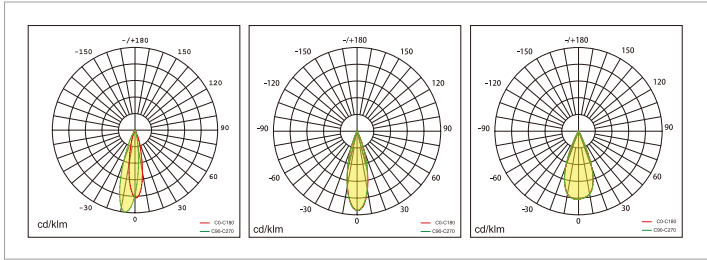

SIZE




CICA-T


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CT0-05503-NN	310lm	5W	2700K3000K/4000K	24°	On/off
B3CT0-05504-NN	315lm	5W	2700K3000K/4000K	36°	On/off

LIGHT DISTRIBUTION

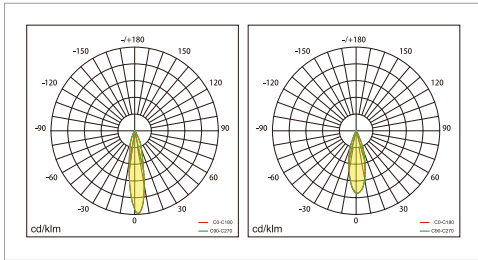

SIZE




03

WALL LUMINAIRES

Wall luminaires with simple design, composed of die-casting aluminum, reflective cup and tempered glass. with high-quality outdoor special powder spraying process which can make the lamp have a tough weather resistance and anti-aging functions, and the protection grade is IP65.

Wall luminaires adopt deep anti-glare reflective cup, with direct and indirect light, which can provide a variety of light emission angles to meet the needs of various scenes, it is with comfortable vision and without light spot. There are optional accessories, which makes the lamp have excellent anti-glare performance. The lamp housing is with integrally die-cast aluminum, and has good heat dissipation performance. Optional DALI2, wireless intelligent dimming and other functions are optional, it is with built-in waterproof terminals, which is convenient for installation and maintenance.

We provide 5 years warranty the lamp can be used as indoor and outdoor facade lighting, architectural decorative lighting, etc.

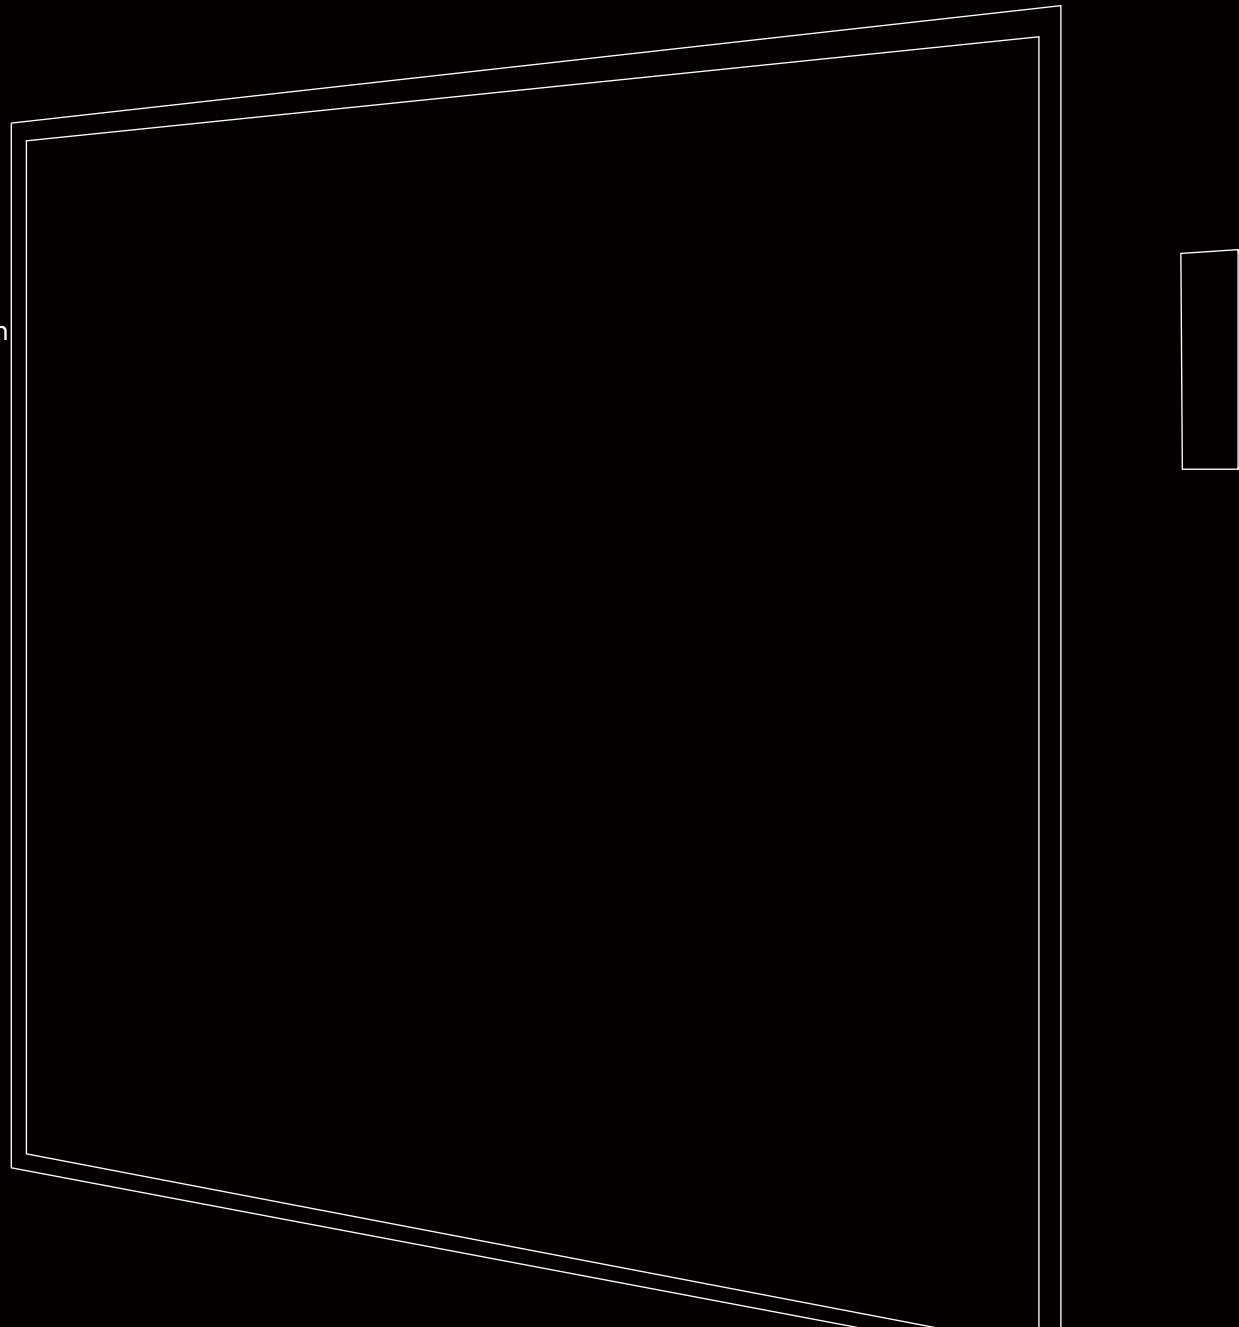


LUNA

NEW

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting.



- Inside area of glass cover is sprayed white, soft light, no dark area
- Simple shape, easy to install
- High-quality processing of craftsmanship details

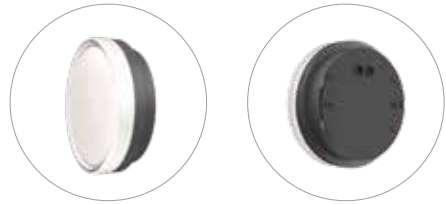


LUNA

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B4LA0-12280-NN	1100lm	12W	2700K	On/off
B4LA0-12380-NN	1100lm	12W	3000K	On/off
B4LA0-12580-NN	1100lm	12W	4000K	On/off
B4LA0-12280-DN	1100lm	12W	2700K	DALI
B4LA0-12380-DN	1100lm	12W	3000K	DALI
B4LA0-12580-DN	1100lm	12W	4000K	DALI
B4LA0-24280-NN	2200lm	24W	2700K	On/off
B4LA0-24380-NN	2200lm	24W	3000K	On/off
B4LA0-24580-NN	2200lm	24W	4000K	On/off
B4LA0-24280-DN	2200lm	24W	2700K	DALI
B4LA0-24380-DN	2200lm	24W	3000K	DALI
B4LA0-24580-DN	2200lm	24W	4000K	DALI

SIZE



CUBE



APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting.



- Modular polarized lens design, various light distribution modes can be combined
- Single indirect/ direct light or both indirect and direct light optional
- Anti-glare design with large shielding angle
- IP65 protection, salt spray test more than 1400 hours




CUBE


PRODUCT MODEL

Part No.	LM	Power	CCT	Optic	Dimming
B4CU0-24366-NN	1920lm	24W	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-24366-DN	1920lm	24W	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12360-NN	960lm	12W	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12360-NN	960lm	12W	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12366-NN	960lm	12W	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12366-DN	960lm	12W	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-06360-NN	480lm	6W	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-06360-DN	480lm	6W	2700K/3000K/4000K	Asymmetric	DALI 2

LIGHT DISTRIBUTION



SIZE



TIE-R

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.



- Optional DALI2, wireless intelligent dimming
- Direct and indirect light




TIE-R


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TR0-24522-NN	2350lm	24W	2700K/3000K/4000K	↓ 18°/18° ↑	On/off
B4TR0-24522-DN	2350lm	24W	2700K/3000K/4000K	↓ 18°/18° ↑	DALI 2
B4TR0-24533-NN	2350lm	24W	2700K/3000K/4000K	↓ 24°/24° ↑	On/off
B4TR0-24533-DN	2350lm	24W	2700K/3000K/4000K	↓ 24°/24° ↑	DALI 2
B4TR0-24544-NN	2350lm	24W	2700K/3000K/4000K	↓ 36°/36° ↑	On/off
B4TR0-24544-DN	2350lm	24W	2700K/3000K/4000K	↓ 36°/36° ↑	DALI 2
B4TR0-43522-NN	3080lm	43W	2700K/3000K/4000K	↓ 18°/18° ↑	On/off
B4TR0-43522-DN	3080lm	43W	2700K/3000K/4000K	↓ 18°/18° ↑	DALI 2
B4TR0-43533-NN	3080lm	43W	2700K/3000K/4000K	↓ 24°/24° ↑	On/off
B4TR0-43533-DN	3080lm	43W	2700K/3000K/4000K	↓ 24°/24° ↑	DALI 2
B4TR0-43544-NN	3080lm	43W	2700K/3000K/4000K	↓ 36°/36° ↑	On/off
B4TR0-43544-DN	3080lm	43W	2700K/3000K/4000K	↓ 36°/36° ↑	DALI 2

LIGHT DISTRIBUTION

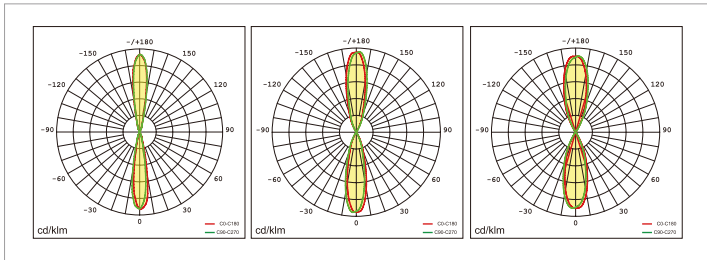

SIZE



TIE-S

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.



- Optional DALI2, wireless intelligent dimming
- Direct and indirect light




TIE-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TS0-24522-NN	2382lm	24W	2700K/3000K/4000K	↓ 18°/18° ↑	On/off
B4TS0-24522-DN	2382lm	24W	2700K/3000K/4000K	↓ 18°/18° ↑	DALI 2
B4TS0-24533-NN	2382lm	24W	2700K/3000K/4000K	↓ 24°/24° ↑	On/off
B4TS0-24533-DN	2382lm	24W	2700K/3000K/4000K	↓ 24°/24° ↑	DALI 2
B4TS0-24544-NN	2382lm	24W	2700K/3000K/4000K	↓ 36°/36° ↑	On/off
B4TS0-24544-DN	2382lm	24W	2700K/3000K/4000K	↓ 36°/36° ↑	DALI 2
B4TS0-43522-NN	3120lm	43W	2700K/3000K/4000K	↓ 18°/18° ↑	On/off
B4TS0-43522-DN	3120lm	43W	2700K/3000K/4000K	↓ 18°/18° ↑	DALI 2
B4TS0-43533-NN	3120lm	43W	2700K/3000K/4000K	↓ 24°/24° ↑	On/off
B4TS0-43533-DN	3120lm	43W	2700K/3000K/4000K	↓ 24°/24° ↑	DALI 2
B4TS0-43544-NN	3120lm	43W	2700K/3000K/4000K	↓ 36°/36° ↑	On/off
B4TS0-43544-DN	3120lm	43W	2700K/3000K/4000K	↓ 36°/36° ↑	DALI 2

LIGHT DISTRIBUTION

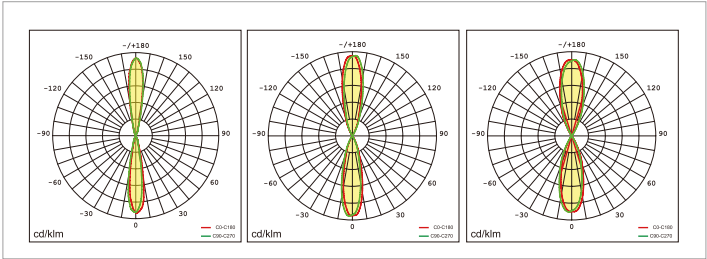


SIZE




NATURE-W


APPLICATIONS:
It can be used for indoor and outdoor facade lighting,architectural decorative lighting, etc.



No Glare



Light Emission 360°




NATURE-W


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B4NW0-10280-NN	963lm	10W	2700K	On/off
B4NW0-10380-NN	963lm	10W	3000K	On/off
B4NW0-10580-NN	963lm	10W	4000K	On/off

SIZE



LIGHT DISTRIBUTION



04 CEILING LUMINAIRES

Halo is a round ceiling lamp with simple appearance and rich texture. The main body of the lamp is die-cast and has good heat dissipation performance. With high quality outdoor powder technology, the lamp has tough weather resistance. Lamp protection grade is IP65.

Halo series have two product sizes with three beam angles to meet lighting requirements in various scenes. The optical part of the lamp is an integrated ring reflective cup design, with anti-glare hood and high quality toughened glass, so that the lamp has a good anti-glare effect and comfortable visual perception. Dali2 dimming, wireless dimming, radar sensing and other intelligent control modes can be provided.

Halo lamp is easy to install, and the optional installation accessories can meet the installation requirements in different cable outlet. The lamps have 5 years warranty.

It can be used in indoor lighting, outdoor corridor lighting, entrance lighting and other application areas.



HALO

APPLICATIONS:
It can be used in indoor lighting, outdoor corridor lighting, entrance lighting



- The optical part is designed as a one-piece annular reflector
- Simple, easy and quick installation




HALO-1


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA1-25520-NN	2135lm	25W	2700K/3000K/4000K	20°	On/off
B5HA1-25520-DN	2135lm	25W	2700K/3000K/4000K	20°	DALI 2
B5HA1-25520-WM	2135lm	25W	2700K/3000K/4000K	20°	Wireless
B5HA1-25540-NN	1987lm	25W	2700K/3000K/4000K	34°	On/off
B5HA1-25540-DN	1987lm	25W	2700K/3000K/4000K	34°	DALI 2
B5HA1-25540-WM	1987lm	25W	2700K/3000K/4000K	34°	Wireless
B5HA1-25550-NN	1746lm	25W	2700K/3000K/4000K	48°	On/off
B5HA1-25550-DN	1746lm	25W	2700K/3000K/4000K	48°	DALI 2
B5HA1-25550-WM	1746lm	25W	2700K/3000K/4000K	48°	Wireless
B5HA1-39520-NN	2600lm	39W	2700K/3000K/4000K	20°	On/off
B5HA1-39520-DN	2600lm	39W	2700K/3000K/4000K	20°	DALI 2
B5HA1-39520-WN	2600lm	39W	2700K/3000K/4000K	20°	Wireless
B5HA1-39540-NN	2328lm	39W	2700K/3000K/4000K	34°	On/off
B5HA1-39540-DN	2328lm	39W	2700K/3000K/4000K	34°	DALI 2
B5HA1-39540-WN	2328lm	39W	2700K/3000K/4000K	34°	Wireless
B5HA1-39550-NN	2000lm	39W	2700K/3000K/4000K	48°	On/off
B5HA1-39550-DN	2000lm	39W	2700K/3000K/4000K	48°	DALI 2
B5HA1-39550-WN	2000lm	39W	2700K/3000K/4000K	48°	Wireless

SIZE

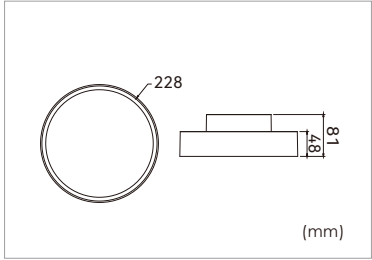

LIGHT DISTRIBUTION

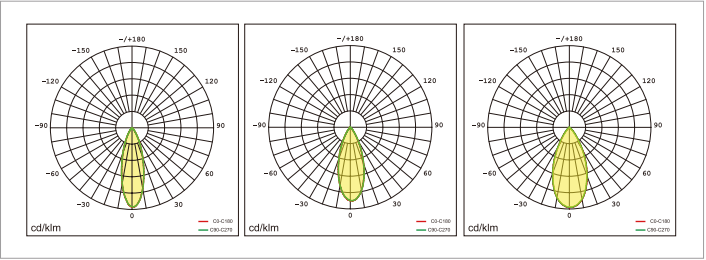


HALO-0


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA0-13520-NN	1069lm	13W	2700K/3000K/4000K	20°	On/off
B5HA0-13540-NN	1105lm	13W	2700K/3000K/4000K	34°	On/off
B5HA0-13550-NN	1173lm	13W	2700K/3000K/4000K	48°	On/off

LIGHT DISTRIBUTION

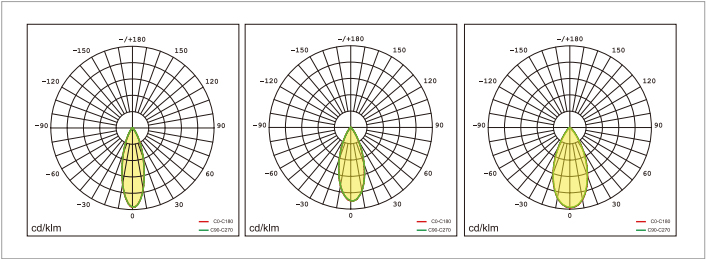

SIZE






05 WALL RECESSED LUMINAIRES

Safe series is a step lamp with special optical design, and with simple shape and rich texture. It is composed of die-casting aluminum parts, PC lenses and engineering plastic parts. The special surface treatment process for outdoor lamps makes the lamps have good weather resistance, the protection grade is IP65.

Safe step light series are available in square square and rectangular shapes. The unique optical design makes the light outlet of the lamp small. With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity. It supports 1-10V dimming and Dali2 dimming.

We offer 5 years warranty. It can be applicable for indoor and outdoor lighting purpose, wall path lighting, etc.




SAFE-S

APPLICATIONS:
It can be applicable for indoor and outdoor lighting purpose, wall path lighting, etc.



- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.

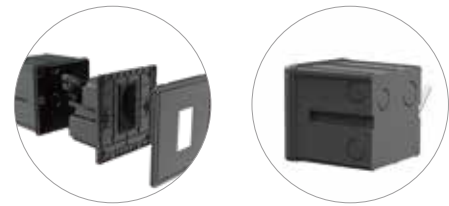


SAFE-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SS0-04250-NN	296lm	4W	2700K	On/off
B2SS0-04350-NN	296lm	4W	3000K	On/off
B2SS0-04550-NN	296lm	4W	4000K	On/off
B2SS0-04250-VN	296lm	4W	2700K	1-10V
B2SS0-04350-VN	296lm	4W	3000K	1-10V
B2SS0-04550-VN	296lm	4W	4000K	1-10V
B2SS0-04250-DN	296lm	4W	2700K	DALI 2
B2SS0-04350-DN	296lm	4W	3000K	DALI 2
B2SS0-04550-DN	296lm	4W	4000K	DALI 2

LIGHT DISTRIBUTION

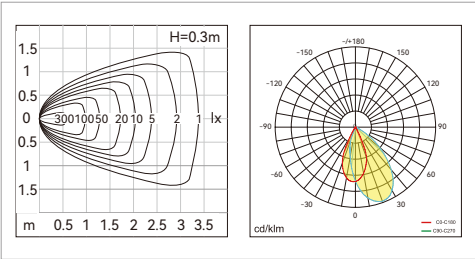

SIZE




SAFE-O

APPLICATIONS:
It can be applicable for indoor and outdoor lighting purpose.wall path lighting, etc.



- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.
- Sufficient position of knock-out holes ensure different wiring directions

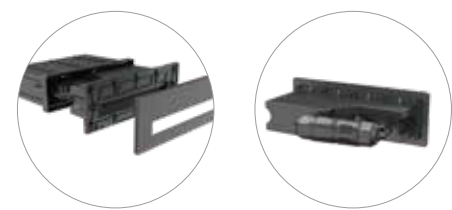


SAFE-O


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SO0-07250-NN	360lm	7W	2700K	On/off
B2SO0-07350-NN	360lm	7W	3000K	On/off
B2SO0-07550-NN	360lm	7W	4000K	On/off
B2SO0-08250-VN	360lm	8W	2700K	1-10V
B2SO0-08350-VN	360lm	8W	3000K	1-10V
B2SO0-08550-VN	360lm	8W	4000K	1-10V
B2SO0-08250-DN	360lm	8W	2700K	DALI 2
B2SO0-08350-DN	360lm	8W	3000K	DALI 2
B2SO0-08550-DN	360lm	8W	4000K	DALI 2

LIGHT DISTRIBUTION

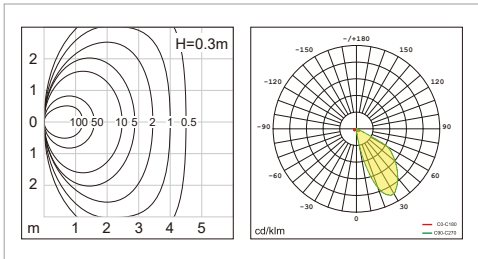

SIZE




06

TABLE LAMPS

NATURE T is a portable and rechargeable desk lamp with a compact and exquisite design that can last for 8 hours (± 1 hours) at full power.

It is controlled by the touch button on the top of the lamp to switch on and switch off the lamp and adjust its brightness.

NATURE T's excellent optical design with a wide range of irradiation, IP65/IK08, meets various indoor and outdoor lighting needs

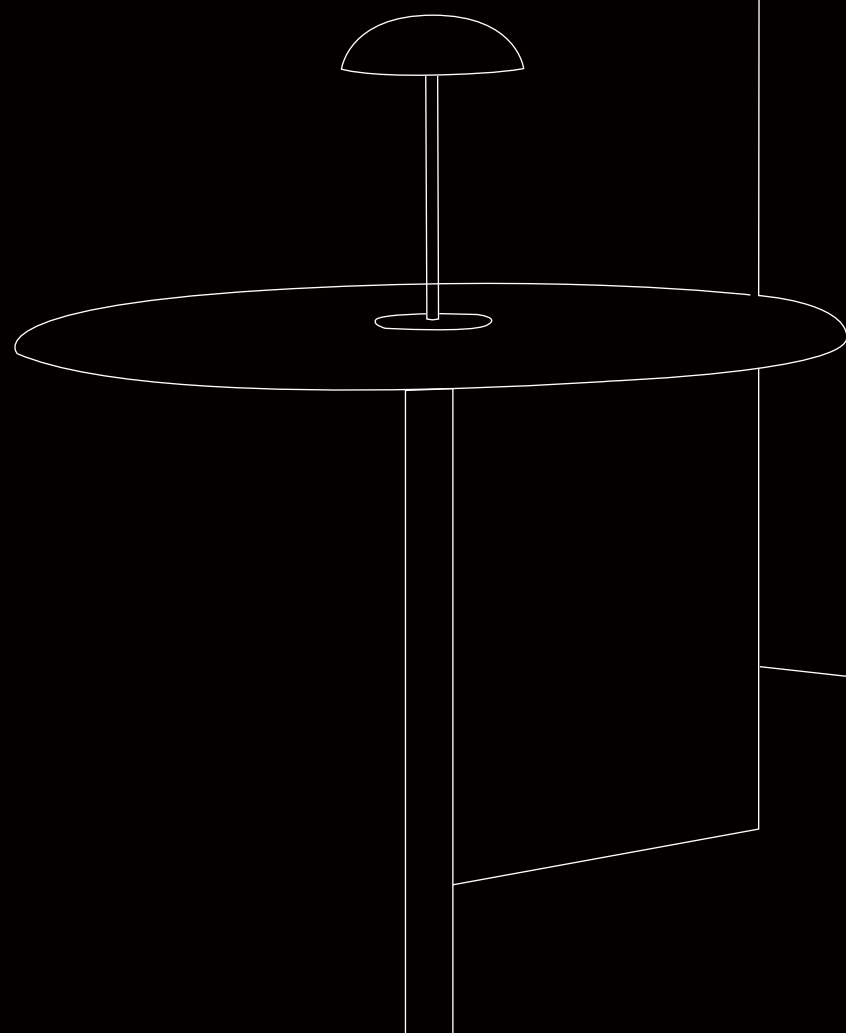

PUDDING



APPLICATIONS:
Meet various indoor and outdoor lighting needs

IP54 IK06

- Pudding design is derived from pudding, its shape is simple and compact;
- Adopt rechargeable battery solution, easy to use;
- Lamp head adopts magnetic solution, matched desktop brackets, floor-standing brackets and hanging brackets and other forms of usage
- Large angle lens for wide light distribution and good uniformity;
- The bracket is easy to store;




PUDDING

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9PU0-04280-TN	360lm	4W	2700K	Touch dimming
B9PU0-04380-TN	360lm	4W	3000K	Touch dimming
B9PU0-04580-TN	360lm	4W	4000K	Touch dimming

SIZE



NATURE-T



APPLICATIONS:
Meet various indoor and outdoor lighting needs



- At full power can be used for 8 hours (±1 hours)
- 145°Wide beam angle, Provide wide light distribution
- charge with a Type C cable
- Lamp head is detachable




NATURE-T

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9NT0-04280-TN	344lm	4W	2700K	Touch dimming
B9NT0-04380-TN	344lm	4W	3000K	Touch dimming
B9NT0-04580-TN	344lm	4W	4000K	Touch dimming

SIZE



LIGHT DISTRIBUTION

